



## Adamatic Model AP-3W Three Wide Proof Box Series

### Standard Features:

- Full stainless steel construction  
300 series s/s interior  
400 series s/s exterior
- Internally mounted air-wash humidification system
- Modular cam lock wall and roof construction
- Interior and exterior bumper guards
- Accommodates up to 75" tall racks
- 2" polyurethane insulated wall/roof panels
- Eye level digital control panel features:
  - Temperature control
  - Humidity control
  - Countdown timers
  - Main power switch
- Three heavy duty cam lift hinges (w/stay open feature) per door
- Heavy duty door closures
- Multiple depths available
- One year parts/labor warranty

### Options:

- Upper closure panel
- Side closure panel (one or both sides)
- Pass-thru
- Heavy duty stainless steel floor (adds 2" to overall height of the unit)
- Correctional package





### Models:

<u>Inside Depth</u>	<u>Without floor</u>	<u>With floor</u>
28"	AP3W-3S	AP3W-3SF
48"	AP3W-3D	AP3W-3DF

Adamatic  
607 Industrial Way West  
Eatontown, N.J. 07724  
Phone: 732-544-8400  
Fax : 732-544-1216  
Website: www.adamatic.com



# Three Wide Proof Box

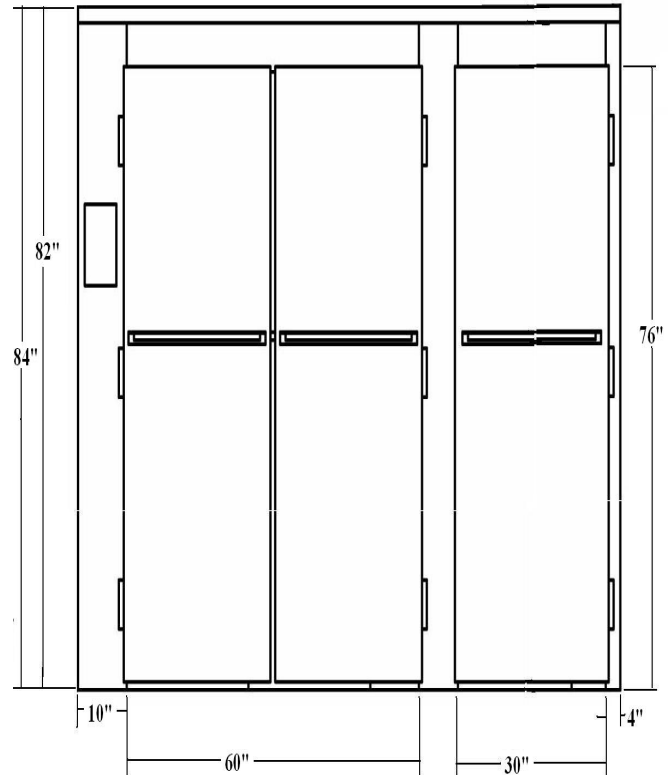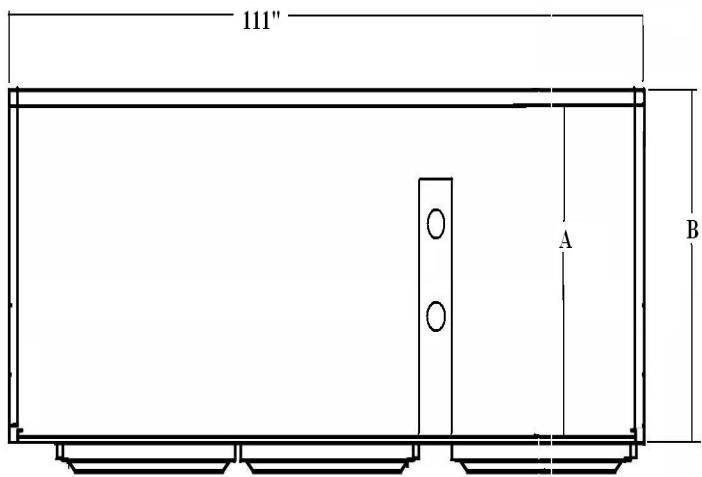

### Interior/Exterior Depth Dimensions

<u>Model Number</u>	<u>A= Interior Depth</u>	<u>B=Exterior Depth</u>
AP3W-3S	28"	31"
AP3W-3D	48"	51"

Note: for pass-thru models add 3" to exterior depth dimension. Interior depth dimension remains the same. If equipped with floor overall height is 86"

### Rack Capacity    Single End Load    Single Side Load    Double End Load

AP3W-3S	3	3	1
AP3W-3D	6	6	3

Note: Above capacities are for standard 18x26 sheet pan racks. Consult factory for proof box capacity on other pan sizes or rack capacities.

### Utility Specifications/Shipping Weight

<u>Model</u>	<u>Electrical (1)</u>	<u>Power Input Kw</u>	<u>Water (2)</u>	<u>Drain (3)</u>	<u>Shipping Weight</u>
AP3W-3S	240/60/3 @ 19.6 amps	8	3/4" NPT	1" NPT	1496 lbs
AP3W-3D	240/60/3 @ 24.3 amps	10	3/4" NPT	1" NPT	1861 lbs

**NOTE: A GROUND WIRE MUST BE SUPPLIED FOR ALL INSTALLATIONS.**

#### Notes:

- (1) Single point electrical connection located on the top rear of the box. 37" from left hand corner, 6" from the rear, 84" from the floor .
- (2) Water supply connection. Hot or cold water supply @25-50 psi. Located 72" from the front left side, 20" from front, 84" from floor. For proper operation of the steam system it is recommended that the water supply follow these specifications: Hardness of 2-4 grains per gallon, ph range of 7.0 to 8.0 and chloride concentration of 0-30 ppm. Consult your water treatment company for proper water filtration system.
- (3) Drain factory equipped for rear exit (can be field modified for front exit). Drain exit located 78" from rear left hand corner, 5" from floor. Drain must be installed angled to floor prior to routing to drain source for proper drainage.

A hard smooth level floor is required on which to position the proof box and access for maintenance is located on the top or inside the unit. It is recommended that a minimum of 24" be available on top of the proof box for servicing.

Proof Box installation must be performed by factory authorized technicians and all utility connections must be performed by licensed contractors to meet all federal, state and local codes.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.