

Packaging - Processing
Bid on Equipment

1-847-683-7720


www.bid-on-equipment.com

AUTOMATIC DUCTLESS AIR CONDITIONER

for best proofing conditions and sanitation

Anets

AC-3

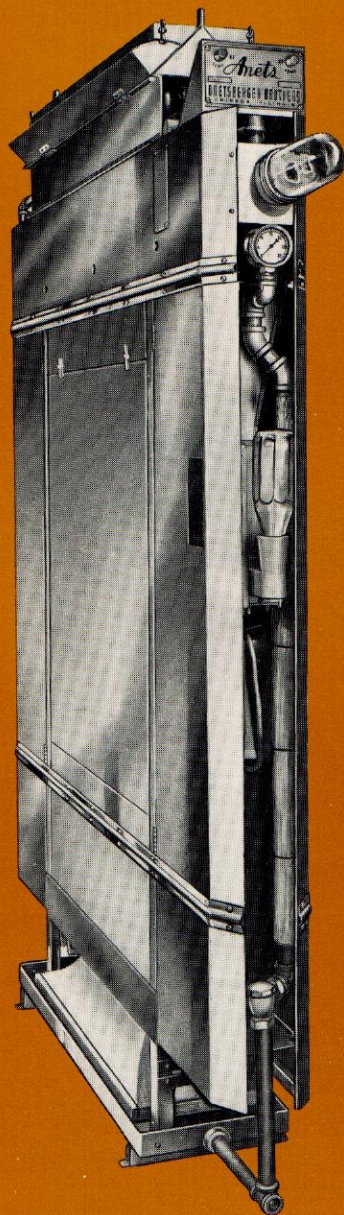

A complete packaged unit that takes up no usable space. Most adaptable for low ceiling rooms.

Fits between bread racks right inside proof box. All major components corrosion resistant and moisture proof.

Sanitary in operation. Large door opening for easy cleaning and servicing.

No air ducts. No heat loss.


Climbing on top of proof box for service eliminated.

Can be installed in any type proof box where bread racks are over 7½" apart for air conditioner clearance.



Equipped with curved stainless steel adjustable air diffusers to direct the conditioned air throughout the entire interior of proof box.

Manual damper adjusts for the proper amount of re-circulated, conditioned air. Keeps dough from crusting for best proofing.


**MORE THAN 50 YEARS OF
EXPERIENCE IS BUILT INTO
ALL ANETS QUALITY EQUIPMENT**

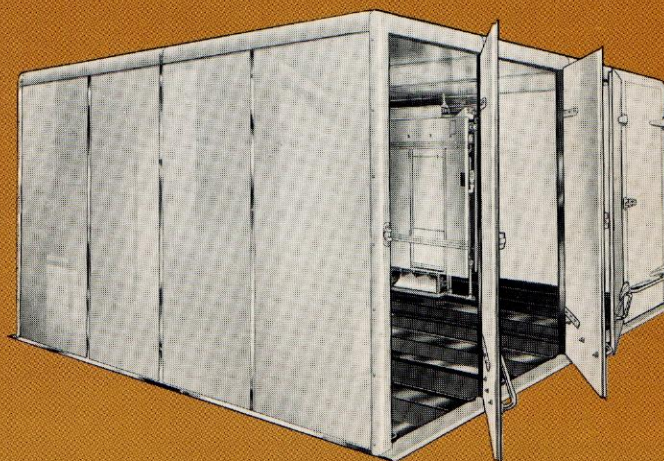

ANETS AC-3 AUTOMATIC DUCTLESS AIR CONDITIONER FEATURES

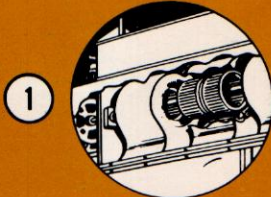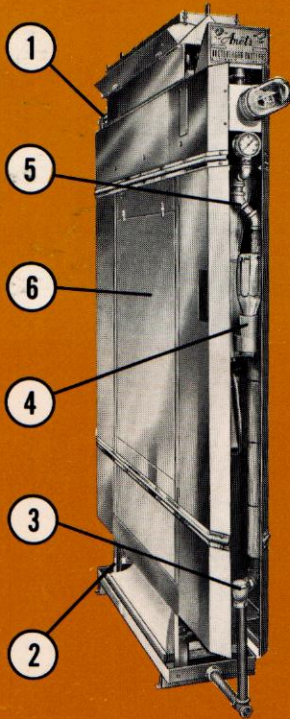


Two, twin multi-vane blower wheels circulate the correct volume of conditioned air to every rack. Statically balanced and mounted on ball-bearing shaft to eliminate vibration and wear.

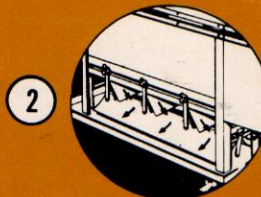


Curved, stainless steel air diffuser directs full volume of conditioned air out each side of unit. The four-way stainless steel plate diffusers are adjustable to direct the conditioned air to all racks within proof box.




Non-clogging brass jet produces fine, floating mist of moist air for accurate humidity control.

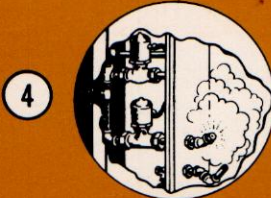

Snap-action solenoid valves open and close temperature and humidity lines to hold selected proofing conditions with laboratory accuracy. Steam inlet valve has needle adjustment for sensitive control. Water spray used only for cooling and air wash.

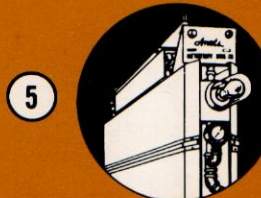

Large capacity copper tube and aluminum rib heating coil. Control lights on panel flash on when supply lines are open. Equipped with steam pressure gauge, service valves, steam trap and moisture proof lights.

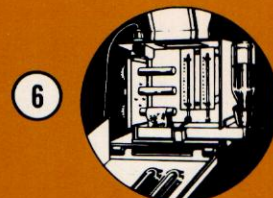

Laboratory type sealed-in electric controllers hold the desired temperature and humidity at all times. Anets exclusive safety reverse-acting control keeps the humidity valve from opening until box warms up, thus preventing sweating. Manual by-pass valve for use in event of power failure.

SERVICE REQUIREMENTS

3/4" steam line. Pressure 5 to 15 lbs.

1/2" cold water line.

3/4" drain line.

MOTOR

1/3 H.P., 110/220 Volt, 60 Cycle, 1 Phase. Moisture proofed.


CAPACITY

Seven standard bread racks, or 1080 cu. ft.

SIZE

82" high, 57" long, 7 1/2" wide.

SHIPPING WEIGHT: 450 lbs.

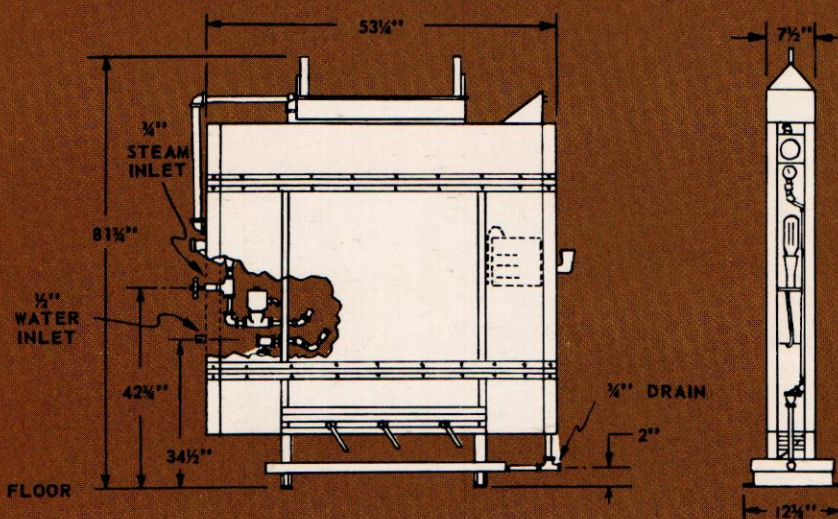

SPECIFICATIONS:

Plenum chamber, Baffles, Air Diffusers, Intake Damper, Blower and Chamber Housing 20 gauge stainless steel. Heavy galvanized angle framework with heavy galvanized guards. Heating coil of copper and aluminum construction. All plumbing brass or galvanized.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

**Packaging - Processing
Bid on Equipment**

1-847-683-7720

www.bid-on-equipment.com

ERS, INC., 180 NORTH ANETS DRIVE, NORTHBROOK, ILL. 60062

Printed in U.S.A.