

# PRODUCT INFORMATION: DV-07 ADJUSTABLE LIQUID METERING VALVE

## DV-07 ADJUSTABLE LIQUID METERING VALVE

### Precise Fluid Flow Control

The DV-07 is a normally closed, air actuated diaphragm valve. This valve is designed for accurate, reliable dispensing of low to medium viscosity fluids. It is suitable for a variety of applications, from microdots to volume filling. Typical fluids include fluxes, reagents and paints. The DV-07CA valve has an ultra high molecular weight (UHMW) polyethylene valve head, ideal for dispensing acid-based fluids and reactive adhesives such as cyanoacrylates.

The DV-07 valve has an adjustable diaphragm for precise flow control. The flexible diaphragm provides millions of dispensing cycles without wear. For maximum precision, you can control the amount of fluid dispensed by varying the fluid pressure, stroke adjustment, and selecting the appropriate dispense tip.

### Valve Operation


The DV-07 valve dispense fluid when the input air pressure acts on the piston, retracting the diaphragm a preset distance, which is determined by the stroke adjustment. A second source of air forces fluid to flow. When the air pressure to the valve is removed, the valve-mounted quick exhaust provides an outlet for air built up in the chamber. The diversion of the air in the chamber permits the diaphragm to quickly shift into the closed position. This feature allows fast on/off operation and creates a positive shutoff effect at the end of the dispense cycle, ensuring clean fluid cutoff and preventing valve dripping. The DV-07 valve has fail-safe positive shutoff that is independent of the air or fluid pressure. If there is power loss or a hose becomes dislodged during production, the valve diaphragm will automatically close, stopping the fluid flow.

### Easy to Maintain

The DV-07 valve can be maintained by periodically purging it with a cleaning agent compatible with the components of the system and the fluid being dispensed. To clean the valve head or replace parts, you can remove the two valve head mounting screws for easy access to the wetted components of the valve.

Solder and brazing pastes or other fluids that contain solid particles are not recommended for use with the DV-07 valve. Please call us for more information regarding your specific fluid and assembly requirements.

See the diagram and specifications on the back for more details.

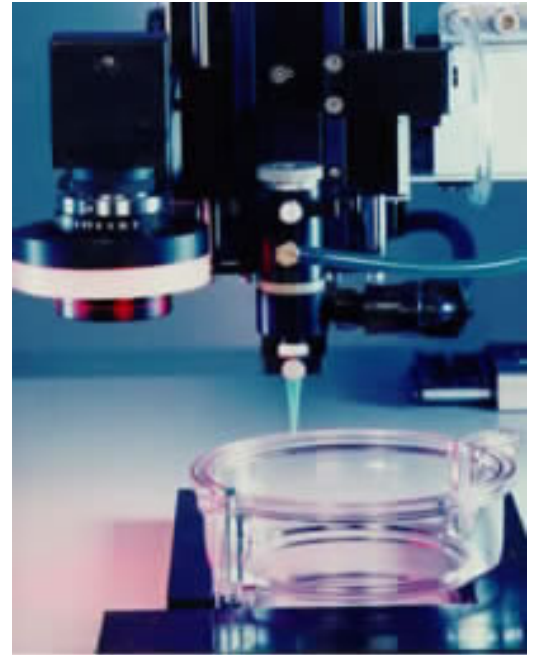

### FEATURES & BENEFITS:

- Stroke adjustment for control of fluid flow rate
- Fail-safe positive shutoff prevents valve dripping
- Low maintenance
- Accurate, reliable dispensing of low-to-medium viscosity fluids.

Packaging - Processing

**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

**Asymtek**  
A NORDSON COMPANY

# DV-07 SPECIFICATIONS

## Size:

78.5 x 26.97 mm (3.09 x 1.06 in.)

## Weight:

122 gm (4.3 oz.)

## Fluid Inlet Thread:

1/8 NPT Female

## Fluid Outlet Thread:

1/4-28 UNF

## Free-Flow Orifice:

2.54 mm (0.10 in.)

## Maximum Fluid Pressure:

483 kPa (70 psi) 14.8 Bar

## Air Pressure Required:

483-621 kPa (70-90 psi)

(4.8-6.2 Bar)

## Diaphragm Stroke:

0.80 mm (0.03 in.) nominal

## Output Variation:

±1.0% nominal

(viscosity dependent)

## Valve Construction:

### Piston and Piston Rod:

Type 303 stainless steel

### Cylinder Body:

Hard-coated aluminum

### Diaphragm:

UHMW polyethylene

### Valve Head:

DV-07: Acetal copolymer

DV-07CA: UHMW polyethylene

### Wetted Parts:

#### Valve Head and Diaphragm

##### w-07:


Acetal copolymer

UHMW polyethylene

##### DV-07CA:

UHMW polyethylene

## DV-07 DIAGRAM

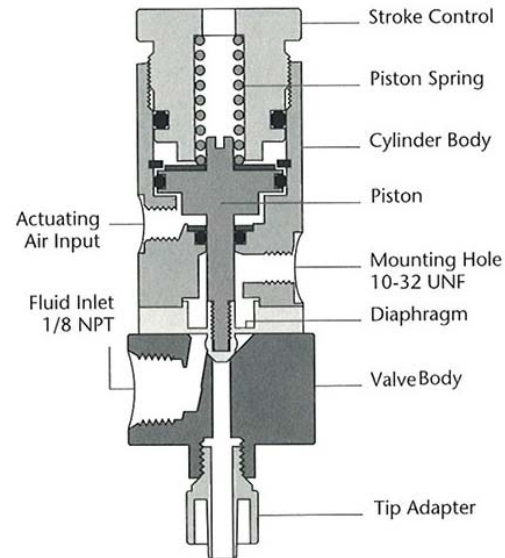

Please contact these locations for the name of your local representative:

#### HEADQUARTERS

2762 Loker Avenue West  
Carlsbad, CA 92010-6603 USA  
U.S. Toll Free: 1-800-ASYMTEK  
Tel: (760) 431-1919  
Fax: (760) 431-2678  
Email: [info@asymtek.com](mailto:info@asymtek.com)

#### INTERNATIONAL SALES

Europe: +31 (0) 43-352-4466  
China, Guangzhou: +8620-8554-9996  
China, Shanghai: +8621-3866-9166  
Japan: +81 (0) 3-5762-2801  
Korea: +82-31-765-8337  
S.E. Asia: +65 6796-9514  
Taiwan: +886-229-02-1860

Asymtek® DV-07 Adjustable Liquid Metering Valve® is a registered trademark of Asymtek and Nordson Corporation.

Asymtek reserves the right to make design changes to products to improve their function. These changes may occur between printings. Contact Asymtek for your specific application requirements.

Asymtek is the proud recipient of Intel Corporation's SCQI award for five years in a row: 2003, 2004, 2005, 2006, 2007

Asymtek is ISO 9001:2000 Certified  
©2008 Asymtek Published 8 April 2008

[www.asymtek.com](http://www.asymtek.com)

**Asymtek**  
A NORDSON COMPANY