

ACCESSORIES AND OPTIONS

- Wide Label Kits
- Photo Electric Product Sensor
- Photo Electric Label Sensor
- Mounting Brackets
- Label Counter
- Product Counter
- Web Monitoring System (low/missing label, broken web)
- Thermal Printer for Loose Loop Print and Apply Labeling Systems
- Semi-Automatic Labelers
- Large Label Roll Capacity
- High Speed Labeling
- 600 Series Automatic Labeling Systems
- Spare Parts Kits
- Custom Equipment Manufactured
- Hot Stamp Imprinting
- Variable Height Tamp





Toll Free: 1-800-634-5376

3101 Industrial Avenue Two, Fort Pierce, Florida 34946
 Telephone: 772-465-4441 • Facsimile: 772-465-5177
 E-mail: info@autolabe.com • Web Page: www.autolabe.com

Packaging - Processing
Bid on Equipment
 1-847-683-7720
 www.bid-on-equipment.com

AUTOMATIC LABEL APPLICATORS



- LABEL DISPENSERS
- SEMI-AUTOMATIC LABEL APPLICATORS
- AUTOMATIC LABEL APPLICATORS
- PRINT AND APPLY LABEL APPLICATORS
- COMPLETE LABELING SYSTEMS

1-800-634-5376

E-mail: info@autolabe.com • Web Page: www.autolabe.com

**WIPE-ON
 AUTOMATIC LABEL APPLICATOR**



MODEL 110

Autolabe's Automatic Wipe-On Applicator has been the workhorse of the pressure sensitive labeling industry since 1967. Originally developed as a low cost solution to apply pressure sensitive labels, the Model 110 has been continually upgraded to meet today's demanding labeling needs and is used in virtually every industry for primary or secondary labeling. The Wipe-On Applicator is best suited for flat surfaces, slightly tapered or convex surfaces. Custom modifications can be made to match the application.

WIPE-ON OPERATIONAL SEQUENCE

The product is guided to the applicator using a consistent conveyor speed. A product sensor detects the product and starts the label applicator. The label is dispensed matching the speed of the conveyor. A roller or brush is used to wipe-down the label to ensure proper adhesion.

EQUIPMENT

Dimensions:
 Width: 15"/38cm
 Length: 23"/58cm
 Height: 24"/61cm

Electric:
 115VAC/60Hz/1 AMPS (max.)
 220VAC/50Hz

Air: n/a

Weight:
 29 lbs/13kg (approx.)

Labeling Speed:
 1250" continuous web speed per minute

LABELS
 Standard 4 1/2" web width
 10" O.D. roll with 3" core
 Die Cut with 1/8" spacing

**BLOW-ON
 AUTOMATIC LABEL APPLICATOR**



MODEL 130

Auto Labe's Blow-On Applicator is designed for non-contact applications or where container recessed areas require accurate label placement. The Blow-On Applicator works at any angle and special rotational mounts are available. The standard label vacuum grid is 4 1/2" x 4 1/2". Custom vacuum grids can be made to accommodate most label sizes. The Model 130 Blow-On applicator is ideal for custom applications where other labeling methods are inefficient.

BLOW-ON OPERATIONAL SEQUENCE

The product is consistently guided to the applicator and can be moving or stopped at the point of application. The label is stripped from the web and is held on a blow grid by vacuum. When the sensor or switch detects the product, the label is blown onto the product with a blast of air.

EQUIPMENT

Dimensions:
 Width: 17"/43cm
 Length: 27"/68cm
 Height: 26"/66cm

Electric:
 115VAC/60Hz/1 AMPS (max.)
 220VAC/50Hz


Air:
 80 to 100 PSIG/3 CFM

Weight:
 35 lbs/16kg (approx.)

Labeling Speed:
 1250" continuous web speed per minute

LABELS
 Standard 4 1/2" web width
 10" O.D. roll with 3" core
 Die Cut with 1/8" spacing

**TAMP-DOWN
 AUTOMATIC LABEL APPLICATOR**

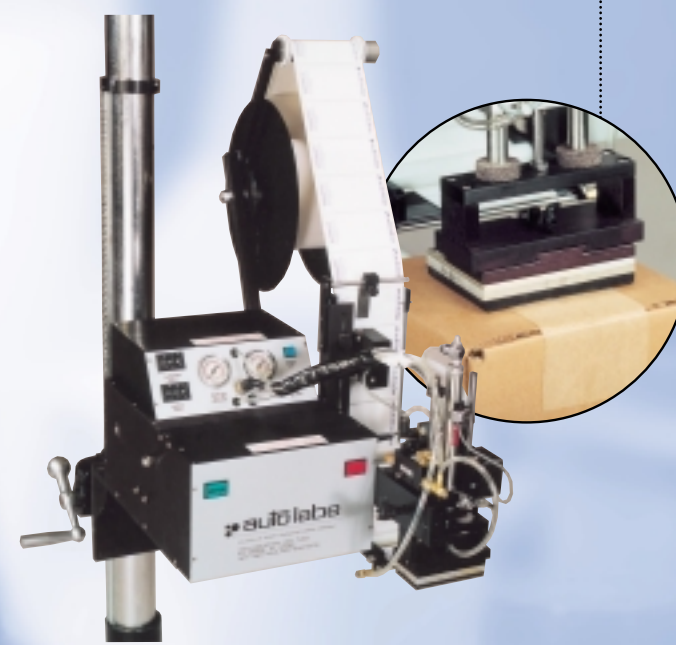

MODEL 140

Auto Labe's Automatic Tamp-Down Label Applicator applies a pressure sensitive label utilizing a positive tamp action to ensure complete label adhesion on the product container or package. Tamp heads of different material from hard to spongy allow for product variation or surface differences. The Tamp-Down Applicator may be used in any direction and a variety of tamp heads are available.

TAMP-DOWN OPERATIONAL SEQUENCE

The product is consistently guided to the applicator and can be moving or stopped at the point of application. The label is stripped from the web and is held on a tamp head by vacuum. When the sensor or switch detects the product, the air cylinder extends pressing the label onto the product.

EQUIPMENT

Dimensions:
 Width: 17"/43cm
 Length: 27"/68cm
 Height: 26"/66cm

Electric:
 115VAC/60Hz/1 AMPS (max.)
 220VAC/50Hz

Air:
 80 to 100 PSIG/3 CFM

Weight:
 35 lbs/16kg (approx.)

Labeling Speed:
 1250" continuous web speed per minute

LABELS
 Standard 4 1/2" web width
 10" O.D. roll with 3" core
 Die Cut with 1/8" spacing



PROVIDING
 COST-EFFECTIVE
 LABELING EQUIPMENT
 FOR GROWING COMPANIES
 SINCE **1967**

AUTOMATIC LABEL APPLICATIONS

Auto Labe's Automatic Label Applicators have proven reliability and are available with many options. The versatility of our label applicators permits labeling from the top, bottom or sides of any product. Our automatic applicators can be used on an existing line or incorporated in a turn-key system. The efficiency of these applicators means uncomplicated set up, easy operation and quick change over from one product to another. With low maintenance and dependability why not call us today for your next label applicator.

**HOT STAMP
 IMPRINTING OPTION**



MODEL 310

A very economical Hot Stamp Imprint device can mount on any applicator to stamp dates, codes or lot numbers on labels.