


KLEEN-SCREEN™

Automatic Emulsion Removing System

*Moving Ahead
With Technology*

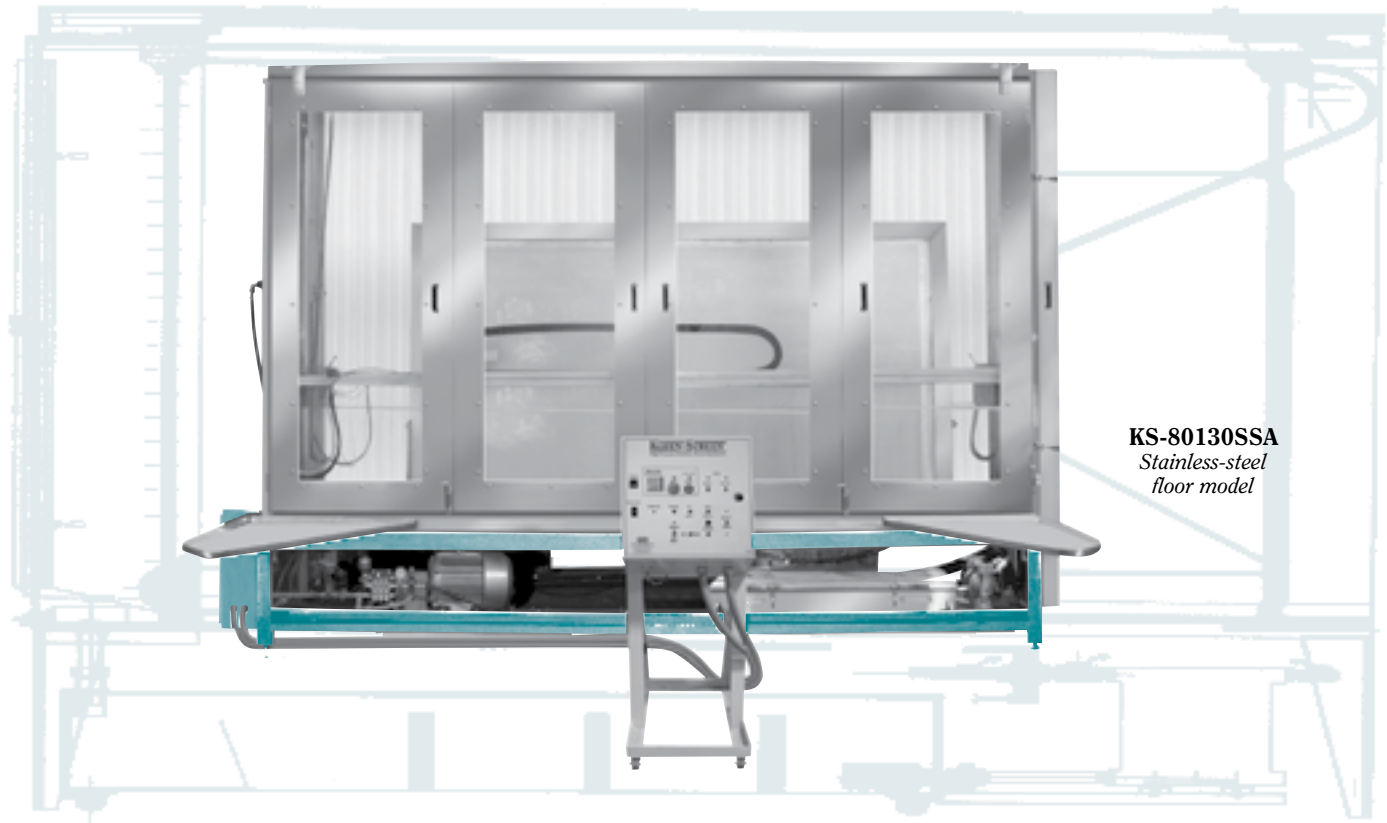

KS-80130SSA
*Stainless-steel
floor model*

ADVANTAGES

- Significantly reduces emulsion removal labor costs
- Extends solvent life by minimizing chemical disposal
- Improves employee safety by reducing direct exposure to solvents
- Stainless-steel, heavy-duty construction for rust-free life
- Permanent stainless-steel filters offer easy maintenance and eliminate replacement costs
- Faster setup with optional screen-positioning feature
- Backlight systems available with all units

The Kleen-Screen™ Automatic High-Pressure Emulsion Removing System revolutionizes the screen reclaiming process by automating both solvent application and high-pressure rinsing in one, fully-enclosed, stainless-steel unit.

A unique electric/pneumatic nozzle system delivers two-sided coverage coordinated precisely with frame-size settings that the operator specifies. With the optional screen-positioning program, up to nine frame-size settings can be saved, significantly reducing setup time. The Kleen-Screen's closed-loop recirculating system filters solvent for continuous use, greatly reducing supply and disposal costs. The enclosed system also limits employee exposure to chemicals, which increases workplace safety.



A.W.T. World Trade Inc.
Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909
sales@awt-gpi.com • www.awt-gpi.com

THE KLEEN-SCREEN™ AUTOMATIC EMULSION REMOVING SYSTEM

Increases Productivity, Reduces Costs and Maximizes Solvent Usage

Standard Features

- Fully automatic cycle from chemical treatment to water washing
- Two-sided, electric/pneumatic cleaning system
- 2,000 psi high-pressure nozzles for powerful, two-sided cleaning
- Speed control for spray nozzle movement
- Multifilter, 20-gallon closed-loop recirculating system for chemistry (40-gallon on larger units)
- Easy-to-clean, permanent stainless-steel filters in recirculating tank
- All stainless-steel construction of major components
- Folding tempered glass doors with automatic shutoff
- Solvent/water switch for changing to water washing only
- Translucent fiberglass back panel
- Front loading for ease of use

Air and Electrical Requirements

- 80-100 psi
- 230 V, 3 PH, 60 Hz
220 V, 1 PH, 50 Hz models available

Specifications

CAT. NO.	MAXIMUM FRAME O.D.	OVERALL (L X W X H)
KS-58SSA	36 x 48" (91 x 122 cm)	80 x 40 x 54" (203 x 102 x 137 cm)
KS-80SSA	52 x 70" (132 x 178 cm)	100 x 40 x 70" (254 x 102 x 179 cm)
KS-100SSA	72 x 96" (183 x 244 cm)	130 x 40 x 90" (330 x 102 x 229 cm)
KS-130SSA	72 x 130" (183 x 330 cm)	160 x 40 x 90" (406 x 102 x 229 cm)
KS-80130SSA	80 x 130" (203 x 330 cm)	160 x 40 x 98" (406 x 102 x 249 cm)
KS-180SSA	72 x 180" (183 x 457 cm)	210 x 40 x 90" (533 x 102 x 229 cm)

Custom sizes available—call for details.

Options and Accessories

- Backlighting systems for accurate inspections
- Automatic screen-positioning program with infinite adjustment and nine-position memory settings for left-to-right dimensions
- 80-gallon recirculating tank
- Spare parts package
- Additional frame holders
- CD frame holding rack

ADDITIONAL A.W.T. PRODUCTS

A.W.T. EMULSION REMOVER

A.W.T. Emulsion Remover™ is a special blend of cleaning solutions that meets standards for safe and effective cleaning of screen printing emulsions. A.W.T. Emulsion Remover has a low VOC rating and meets or exceeds most guidelines. This solvent dissolves and removes emulsions efficiently with a minimum of time and effort.

CAT. NO.	DESCRIPTION
ER-31G	1-gallon container
ER-35G	5-gallon container
ER-355G	55-gallon drum

A Great Addition for Fast and Easy Screen Cleaning!


KLEEN-VIEW™ AUTOMATIC

- Automatic, pneumatic operation
- Stainless-steel construction
- Stainless-steel filters in recirculation tank
- Automatic shutoff
- Thick, clear, tempered glass doors



Call 773.777.7100 for more information!

For an A.W.T. dealer near you, contact:

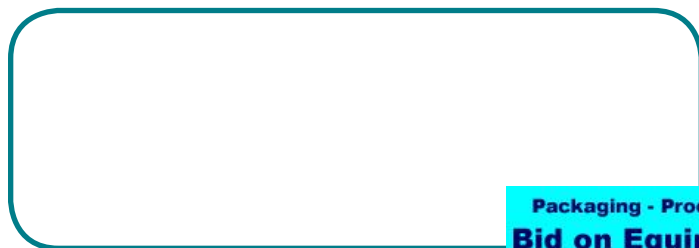

**Packaging - Processing
Bid on Equipment**

1-847-854-8577

www.bid-on-equipment.com

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com



Manufactured by

A.W.T. World Trade Inc.

Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA