

THE A.W.T. WORLD TRADE GROUP

**Your Complete Manufacturing Source for
Screen Printing Equipment, Supplies & Parts**

Building on more than 30 years experience serving clients in the graphic, textile and industrial markets, A.W.T. World Trade provides screen printers with a complete manufacturing source for prepress and printing supplies, machine parts, and remanufactured equipment.

Experience shows that when printers use a single manufacturing source, costly incompatibility problems between equipment lines and suppliers are greatly reduced. A.W.T. develops complete systems that work efficiently and economically to avoid printing errors, reduce downtime, and keep you profitable.

Our technical sales staff will make sure you choose the right system for your company's needs, delivering the performance you require at a cost within your budget. Industry experts in both technical support and service will walk you through the setup and installation process for maximum productivity right from the start.

The A.W.T. World Trade Group was formed in 2002 when A.W.T. World Trade Inc. and Graphics Parts International Inc. purchased American Screen Printing Equipment.



A.W.T.
World Trade Inc.
www.awt-gpi.com



American
M&M
www.screenprintmachinery.com



GRAPHIC PARTS
INTERNATIONAL INC.
www.gpiparts.com

CORPORATE HEADQUARTERS AND MANUFACTURING FACILITY

A.W.T. World Trade Inc.

4321 N. Knox Avenue,
Chicago, IL 60641 USA
773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com

SALES AND DISTRIBUTION

Serving the Eastern U.S., Central and South America


A.W.T. World Trade Inc.
8984 N.W. 105th Way, Medley, FL 33178 USA
305.887.7500 • Fax: 305.887.2300

floffice@awt-gpi.com • www.awt-gpi.com

EUROPEAN SALES AND DISTRIBUTION

A.W.T. World Trade Europe BV
Xenonstraat 80, 1362 GH Almere, Holland
+(31)(0)(36)536.0873 • Fax: +(31)(0)(36)536.0626
info@awt-europe.com • www.awt-europe.com

For an A.W.T. dealer near you, contact:

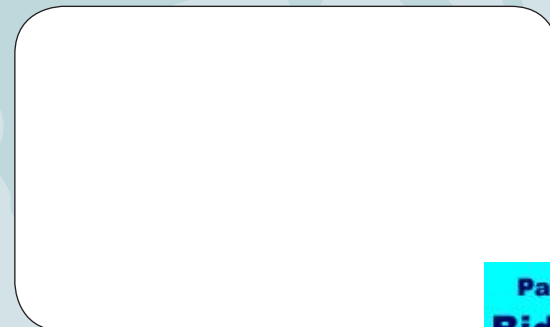


Packaging - Processing
Bid on Equipment
1-847-854-8577
www.bid-on-equipment.com

KLEEN-VIEW™

*Moving Ahead
With Technology*

AUTOMATIC

Closed-Loop Screen Cleaning with Filtered Recirculation System

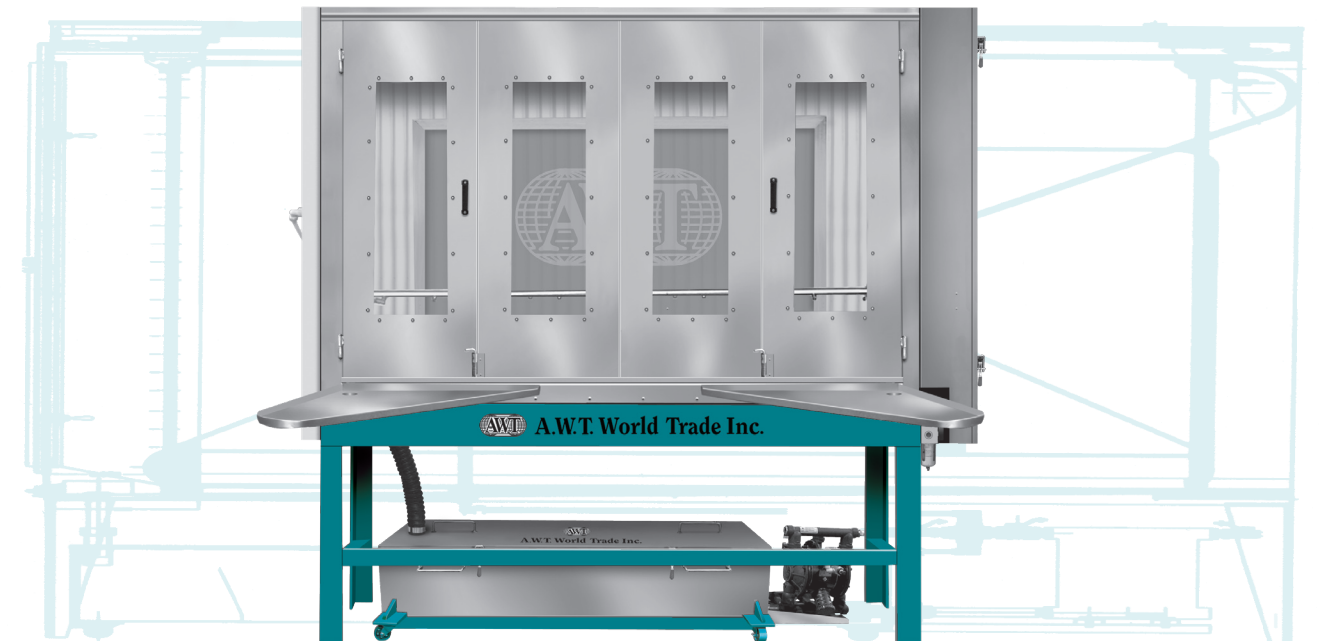

ADVANTAGES

- Fully-enclosed, 100% pneumatic operation
- Glass doors with automatic cutoff sensor
- Stainless-steel, heavy-duty construction
- Translucent fiberglass back panel
- Double-sided, closed-loop chemistry sprayer
- Variable speed controls
- Works with A.W.T.'s Safe-T-Wash™ or other biodegradable chemistry
- Exhaust port for fume removal
- Closed-loop recirculation system
- Multistage, reusable stainless-steel filters
- Reduced exposure to chemicals

The Kleen-View™ Automatic is a fully-enclosed, completely pneumatic system that efficiently cleans screens as it captures ink residue for safe disposal.

The stainless-steel Kleen-View Automatic combines a screen-washing system and chemistry recirculation tank into one convenient unit with fully adjustable chemical flow. For fast and thorough cleaning, a two-sided chemistry sprayer uses banks of high-pressure nozzles to simultaneously attack the screen from both sides.

Permanent stainless-steel filters are easily removed for cleaning, eliminating the need for costly replacements. Wide front doors allow easy access, and clear, tempered glass enables safe monitoring of the screen washing process.



Manufactured by

A.W.T. World Trade Inc.
Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com

THE KLEEN-VIEW™ AUTOMATIC SCREEN WASHING SYSTEM

Standard Features

Design and Construction

- Fully pneumatic operation
- Cleans both sides of the screen simultaneously
- Automatic cycle completion shutoff
- Heavy-duty, stainless-steel construction
- Permanent, removable stainless-steel filters
- Multifilter, 20-, 40- or 80-gallon recirculation tank
- Clear, tempered glass doors
- Stainless-steel drip trays (doors)
- Automatic, open-door safety sensor

Air Requirements


- 80-100 psi

Options and Accessories

- Backlighting systems available for all units *
- Liquid flow diverters
- Air drying system
- Automatic exhaust system
- Seri-Vac™ 9" aluminum nozzle
- Squeegee/Floodbar/Accessories Rack
- Stainless-steel drip tray (floor)

*  Flammable solvents cannot be used with backlight systems.

Specifications Diagram

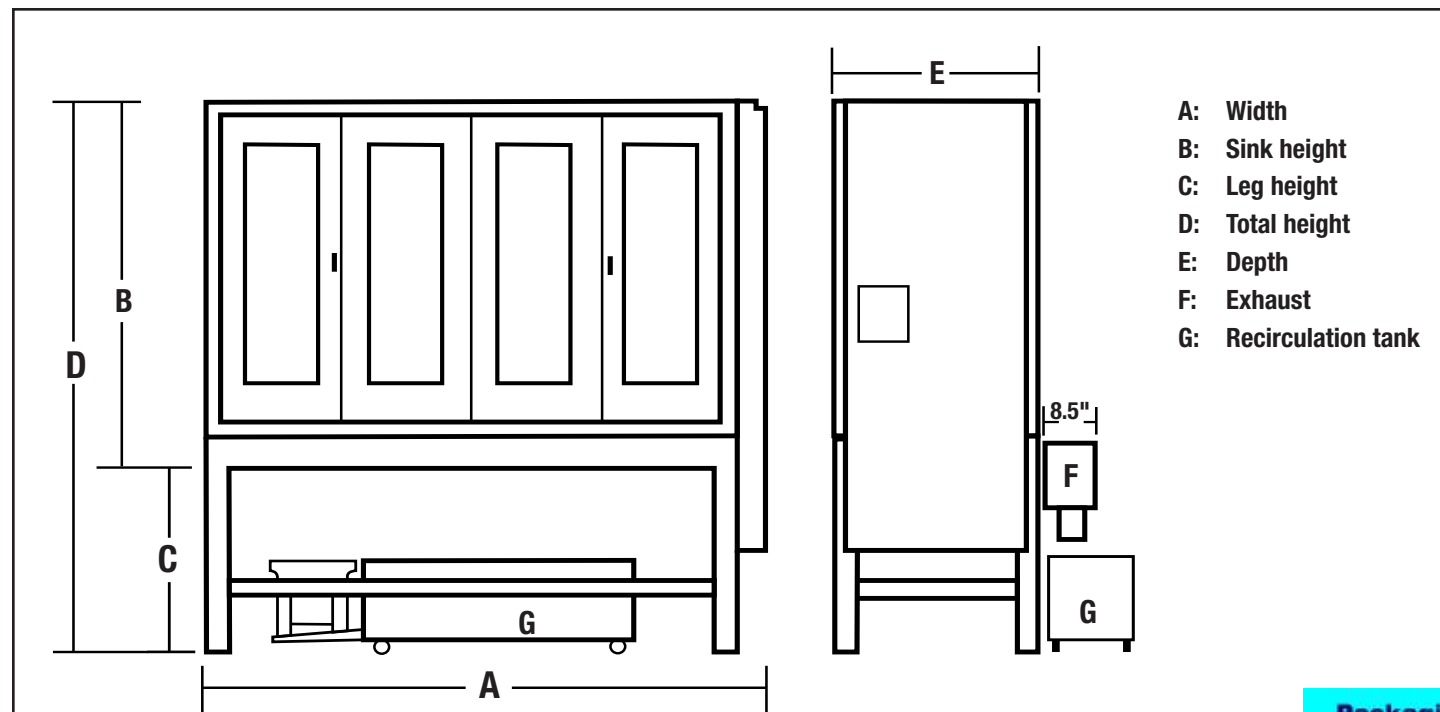

A.W.T. SAFE-T-WASH™



Low-Odor Screen Wash

Safe-T-Wash™ is a special blend of cleaning solutions that meets standards for safe and effective cleaning of all screen printing inks. Safe-T-Wash has a low VOC rating and meets or exceeds most guidelines. This screen cleaning solution dissolves most ink systems efficiently with a minimum of time and effort.

CAT. NO.	DESCRIPTION
STW-L01Q	1-quart container
STW-L01G	1-gallon container
STW-L05G	5-gallon container
STW-L055G	55-gallon container

Optional Squeegee/Floodbar/Accessories Rack for Kleen-View Automatic



Thoroughly cleans screens using biodegradable chemistry

Specifications

CAT. NO.	DESCRIPTION	MAX. FRAME SIZE O.D.	DIMENSIONS					RECIRCULATION TANK
			A WIDTH	B SINK HEIGHT	C LEG HEIGHT	D TOTAL HEIGHT	E DEPTH	
KV-58SSA	Stainless-steel floor model sink with stand	36 x 54" (91 x 137 cm)	87" (221 cm)	58" (147 cm)	20" (51 cm)	78" (198 cm)	32" (82 cm)	20 gallon
KVL-58SSA	Backlight option 115 V, 1 PH, 60 Hz.							
KVL-58-50SSA	Backlight option 220 V, 1 PH, 50 Hz.							
KV-80SSA	Stainless-steel floor model sink with stand	52 x 70" (132 x 178 cm)	103" (262 cm)	74" (188 cm)	20" (51 cm)	94" (239 cm)	32" (82 cm)	40 gallon
KVL-80SSA	Backlight option 115 V, 1 PH, 60 Hz.							
KVL-80-50SSA	Backlight option 220 V, 1 PH, 50 Hz.							
KV-100SSA	Stainless-steel floor model sink with stand	72 x 96" (183 x 244 cm)	130" (330 cm)	108" (274 cm)	20" (51 cm)	128" (325 cm)	32" (82 cm)	80 gallon
KVL-100SSA	Backlight option 115 V, 1 PH, 60 Hz.							
KVL-100-50SSA	Backlight option 220 V, 1 PH, 50 Hz.							
KV-130SSA	Stainless-steel floor model sink with stand	72 x 130" (183 x 330 cm)	164" (417 cm)	108" (274 cm)	20" (51 cm)	128" (325 cm)	32" (82 cm)	80 gallon
KVL-130SSA	Backlight option 115 V, 1 PH, 60 Hz.							
KVL-130-50SSA	Backlight option 220 V, 1 PH, 50 Hz.							
KV-13084SSA	Stainless-steel floor model sink with stand	84 x 130" (213 x 330 cm)	164" (417 cm)	108" (274 cm)	20" (51 cm)	128" (325 cm)	32" (82 cm)	80 gallon
KVL-13084SSA	Backlight option 115 V, 1 PH, 60 Hz.							
KVL-13084-50SSA	Backlight option 220 V, 1 PH, 50 Hz.							
KV-180SSA	Stainless-steel floor model sink with stand	72 x 180" (183 x 457 cm)	214" (544 cm)	108" (274 cm)	20" (51 cm)	128" (325 cm)	32" (82 cm)	80 gallon
KVL-180SSA	Backlight option 115 V, 1 PH, 60 Hz.							
KVL-180-50SSA	Backlight option 220 V, 1 PH, 50 Hz.							

Custom sizes available—call for details.