


POWER-KING™ 2

*Moving Ahead
With Technology*

High-Pressure Screen Washers

Packaging - Processing
Bid on Equipment
1-847-854-8577
www.bid-on-equipment.com

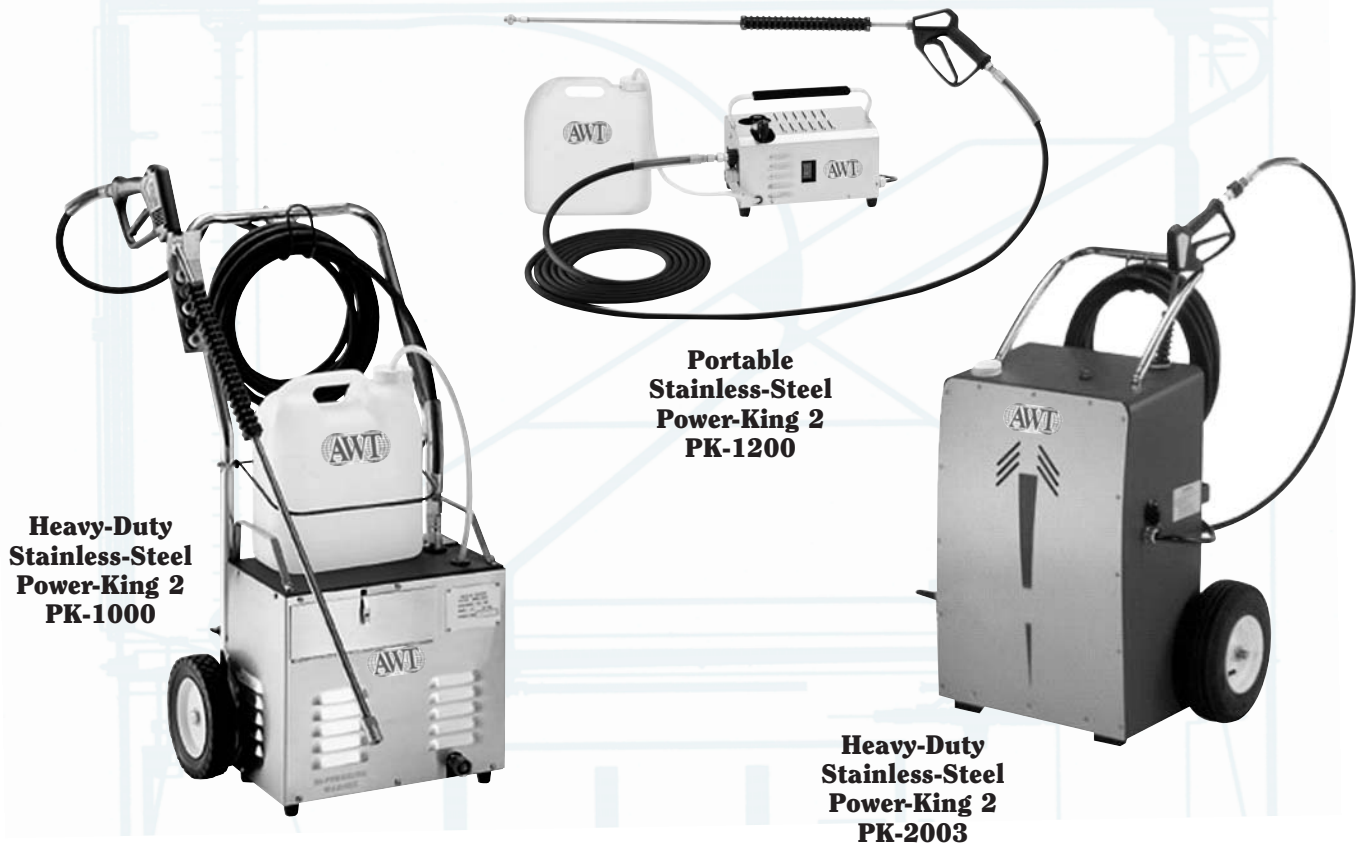

**Heavy-Duty
Stainless-Steel
Power-King 2
PK-1000**

**Portable
Stainless-Steel
Power-King 2
PK-1200**

**Heavy-Duty
Stainless-Steel
Power-King 2
PK-2003**

ADVANTAGES

- Up to 2,000 psi
- Corrosion-resistant stainless-steel cover
- Steel-reinforced rubber hose
- 3' stainless-steel wand
- Detergent container provided for additional applications
- Water-pressure controls minimize water consumption
- Three different models offer high-pressure washing for every type of shop

A.W.T.'s new Power-King™2 High-Pressure Screen Washers are the industry standard in screen cleaning units, delivering up to 2,000 psi of directed spraying power and an output of up to 3.2 gallons per minute. All three Power-King 2 units are built to provide optimum, long-lasting and maintenance-free performance.

An excellent addition to the Kleen-View™ series of washout sinks, the Power-King 2 units will efficiently remove unexposed emulsion, hardened direct emulsions, blockouts and water-soluble films from polyester, stainless-steel, nylon, silk or other meshes. Power-King washers can also be used for degreasing screens.



Manufactured by

A.W.T. World Trade, Inc.
A Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com

THE POWER-KING™ 2 SERIES OF HIGH-PRESSURE SCREEN WASHERS

Three Powerful Models for Every Application

PORTABLE POWER-KING™ 2

The PK-1200 stainless-steel pressure washer blasts 1,200 psi at 1.8 gallons per minute from its compact design. This washer is designed for easy mobility in tight locations. The variable-pressure nozzle adjusts from 150 to 1,200 psi. A Triplex plunger pump in oil bath assures smooth operation. Stainless-steel features, including the cover, chassis and 3' wand, along with the steel-reinforced rubber hose, make this portable Power-King extremely durable.

Heavy-Duty Stainless Steel Power-King™ 2, 2-gallon container

The PK-1000, heavy-duty stainless-steel pressure washer delivers 1,000 psi at 2.2 gallons per minute. This model is mounted on wheels for easy handling and storage. Solid construction -- featuring corrosion-resistant stainless-steel housing, steel-reinforced rubber hose and 3' stainless-steel wand -- gives you a long-lasting rugged screen washer. Precise cleaning control is achieved with a variable-pressure nozzle adjustable from 150 to 1,000 psi.

Heavy-Duty Stainless Steel Power-King™ 2, 8-gallon container

The PK-2003, heavy-duty stainless-steel pressure washer delivers the highest-pressure water flow for maximum cleaning strength. Blast up to 2,000 psi at 3.2 gallons per minute to quickly and effectively remove stubborn screen residue. Ideal for use in high-production shops, the PK-2003, with an 8-gallon container, can

clean several screens at once. A steel-reinforced hose, a 3' stainless-steel wand and impact and chemical-resistant housing maximize its amazing cleaning power. The easy-to-handle unit is mounted on wheels for superior mobility and accessibility. Precise cleaning control is achieved with a variable-pressure nozzle adjustable from 150 to 2,000 psi.

Larger units available. Call A.W.T. for a quote.

ALUMINUM NOZZLE

Speeds Drying Time by Removing Excess Water

Increase your productivity with this angled, heavy-duty 9" aluminum nozzle. Trouble-free, lightweight, and rust-proof, the Nozzle fits 1-3/8" O.D. hoses and almost any wet-dry vacuum. Milled smooth to prevent screen damage, this nozzle is the perfect companion to the Power-King 2 Screen Washers!



Model No.
SV-2

Description
9" aluminum nozzle

For an A.W.T. dealer near you, contact:

**Packaging - Processing
Bid on Equipment**
1-847-854-8577
www.bid-on-equipment.com

Specifications

Model No.	Washing Power	Electrical Requirements	Detergent Container	Motor	Pump	Pump Dimensions	
						(HxWxD)	Weight
PK-1200-60	1,200 psi @ 1.8 gpm	115 V, 1 Ph, 60 Hz	2.5 gallon	1.7 HP 15 amps	Triplex plunger pump in oil bath	10.5x15x9" (26x38x23cm)	41 lbs. (19 kg)
PK-1200-50	1,200 psi @ 1.8 gpm	230 V, 1 Ph, 50 Hz	2.5 gallon	1.7 HP 15 amps	Triplex plunger pump in oil bath	10.5x15x9" (26x38x23cm)	41 lbs. (19 kg)
PK-1000-60HD	1,000 psi @ 2.2 gpm	115 V, 1 Ph, 60 Hz	2.5 gallon	1.5 HP 15 amps	Twin piston cast iron	37x20x17" (94x51x43cm)	83 lbs. (38 kg)
PK-1000-50HD	1,000 psi @ 2.2 gpm	115 V, 1 Ph, 50 Hz	2.5 gallon	1.5 HP 15 amps	Twin piston cast iron	37x20x17" (94x51x43cm)	83 lbs. (38 kg)
PK-2003-60HD	2,000 psi @ 3.2 gpm	230 V, 1 Ph, 60 Hz	8 gallon built in	5 HP 23 amps	Plunger type in oil bath	19x23x32" (48x58x81cm)	203 lbs. (92 kg)
PK-2003-50HD	2,000 psi @ 3.2 gpm	230 V, 1 Ph, 50 Hz	8 gallon built in	5 HP 23 amps	Plunger type in oil bath	19x23x32" (48x58x81cm)	203 lbs. (92 kg)



Manufactured by

A.W.T. World Trade, Inc.
A Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com