


2-EZ HS DP



High Speed Drop Packer

The well proven capabilities of the Combi DP Drop Packer have been enhanced with a higher level of efficiency. Integrated into the frame of this state-of-the-art case packer is the efficient Combi 2-EZ HS high speed case erector. Now an even larger variety of product sizes, shapes, weights and materials can be quickly and easily packed in large cases at speeds up to 20 cpm, while still maintaining a compact footprint. As with all our drop packers, adjustable lane guides can be quickly and easily reconfigured, giving the user the flexibility to pack multiple products on the same line.

Automatically adjust case lift height through the HMI panel

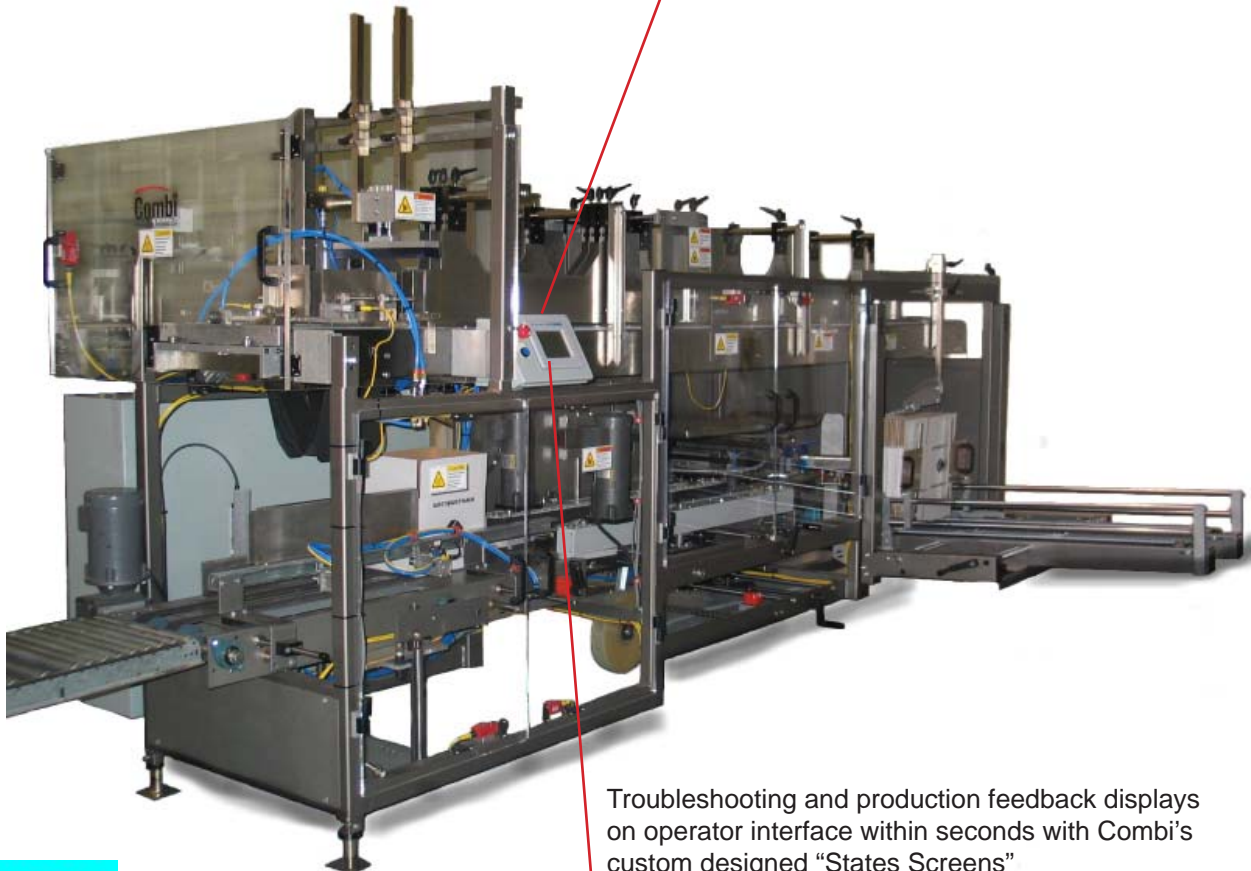

Troubleshooting and production feedback displays on operator interface within seconds with Combi's custom designed "States Screens"

Packaging - Processing

Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

2-EZ HS DP

Features and Specifications:

- Heavy-Duty Welded Steel Construction with 2-Component Primer & "Steel-It" Paint
- Powered Easy Load Case Magazine
- Vacuum Blow Off to Prevent Corrugated Dust Build-Up
- Servo Driven Carriage Assembly
- 3-Stage Erection Process with VFD Drive
- Heavy-duty Case Lift Assembly with Powered Case Discharge
- Right Hand or Left Hand Execution
- Stainless Steel Contact Points
- Allen Bradley PLC Control and OIT/HMI
- Dual Belt Drive Case Sealing
- Lockout / Tagout Safety Disconnect
- Combi High Speed 2" Tapehead
- One Set of Change Parts for One Pack Pattern

Electrical Service:

- 230v / 3 phase / 20 amps / 60 Hz


Air Consumption:

- 80 psi, consumes approximately 15 cfm

Model	Case Size Min	Case Size Max	Speed: CPM*	Standard Case Discharge
2-EZ HS DP	8 x 6 x 5" (203x152x127mm)	24 x 16 x 18" (610x406x457mm)	up to 20	21"

* System speeds vary depending on product, pack patterns and case size

LEFT HAND SYSTEM

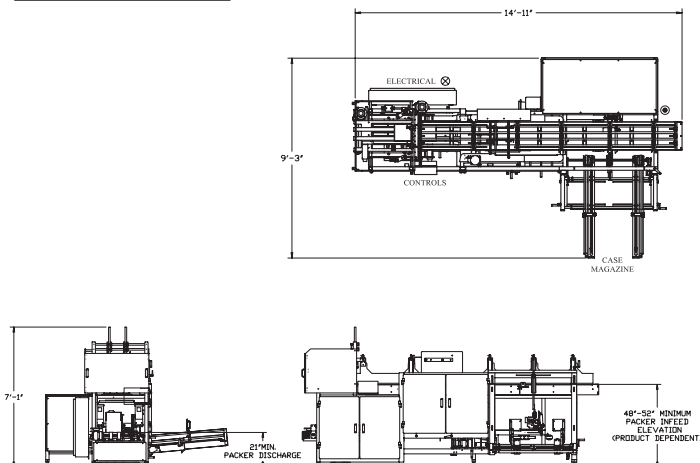

Multi-Lane Diverter (optional)

The Combi 128 Product Diverter counts and indexes product from one lane up to 8 individual lanes, while maintaining orientation and constant product flow.

- Diverts up to 240 containers per minute
- Used primarily for non-round bottles and cans
 - Safe shifting "anti-jam" design
 - No-tool adjustments
 - Optional servo drive
- Also available as free standing unit over existing conveyor

Distributed by:



5365 East Center Dr. NE
Phone: 1-800-521-9072

Canton, OH 44721
Fax: 330-456-4644

© 2007 Combi Packaging Systems LLC