




401 EAST THIRD STREET • PLAINFIELD, NEW JERSEY • 07060 • USA
 Phone: (908) 757-2040 • Telex: 178007 COZZOLI PNFD • Fax: (908) 757-7386

Section II
 Group 3
 Page 1.01

Table Top Powder Filler

U.S. PATENT NO.
 4640322

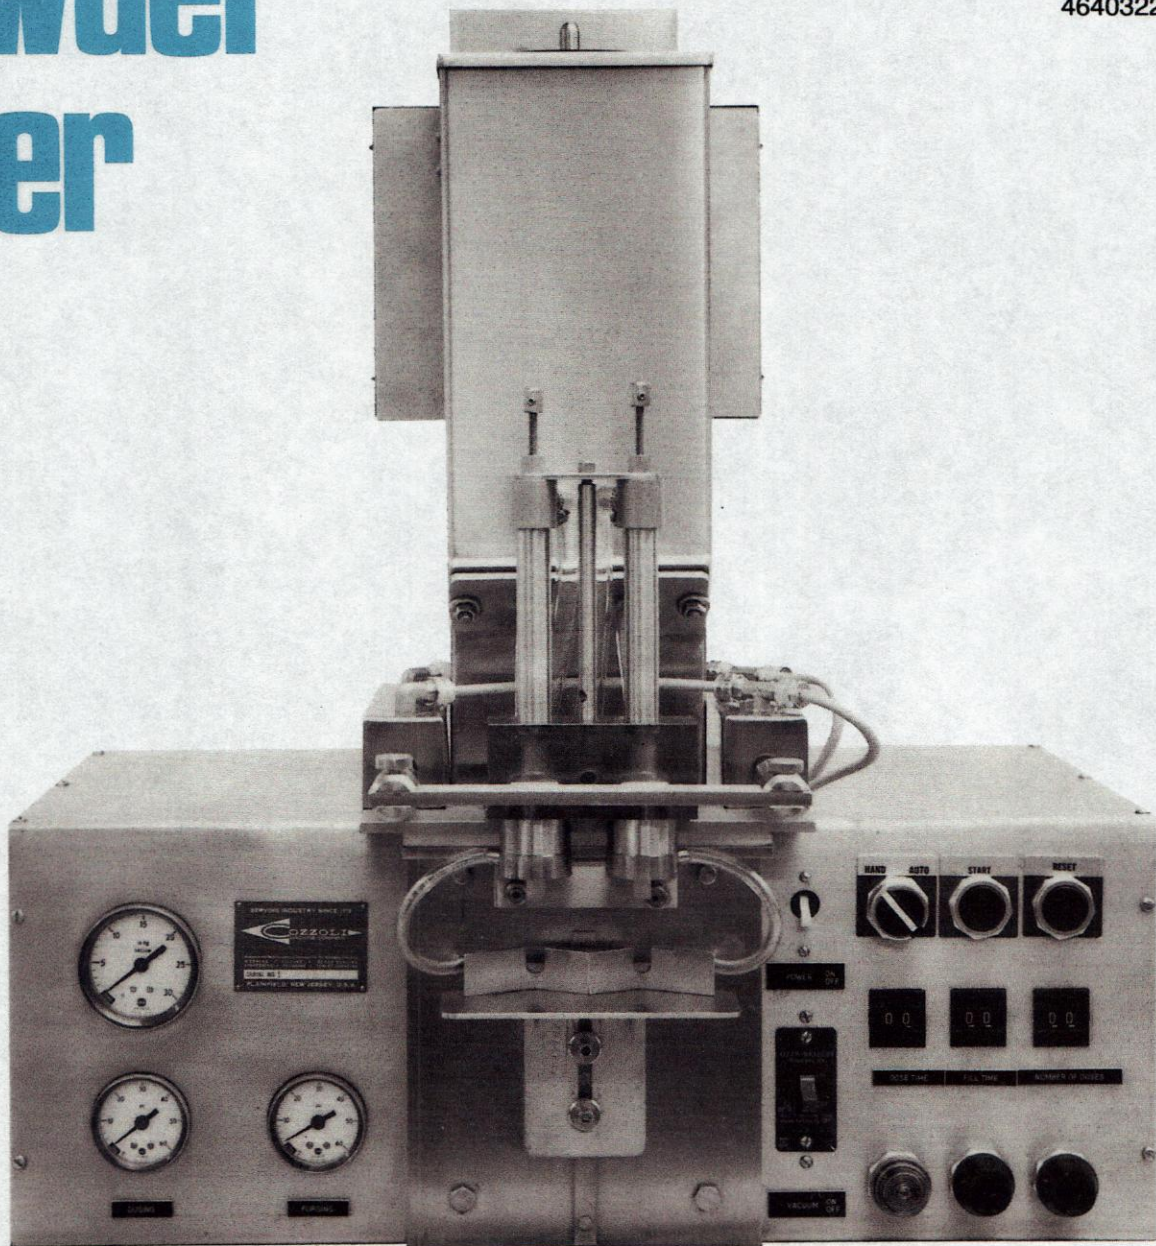

**Packaging - Processing
 Bid on Equipment**

1-847-683-7720

www.bid-on-equipment.com

Model PF2-TT

Cozzoli Exclusives

- Totally enclosed powder path eliminates possibility of product contamination
- Fill volume of each piston can be independently adjusted during operation
- Multiple dose fills possible by simply setting front panel control
- Liquid media capability which greatly simplifies the validation process
- No doctor blades or abrading parts within powder contact area
- Product loss due to dusting virtually eliminated
- Easy fill volume adjustment—no tools needed
- Microprocessor controls powder pick-up time with minimum speed loss
- Low profile for clean-room operation

Specifications

Packaging - Processing Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

Number of Fill Stations	1 or 2
Fill Range	50mg to 75 grams (single dose)*
Accuracy	± 1 percent depending on powder characteristics
Containers per Minute	Up to 50 (depending on operator skill)
Minimum/Maximum Container Size	13 mm (1/2") to 127 mm (5") OD, 60 mm (2 3/8") OD max two-head machine; 25 mm (1") to 128 mm (7") high**
Container Movement	Manual
Standard Electricals	115 Volts, 60 Hertz, 1 Phase
Air Requirements	80 to 125 PSI (clean air)
Controls	Programmable Controller
Dimensions	660 mm × 533 mm × 737 mm (26"L × 21"W × 29"H)
Net Weight	Approximately 54 kg (120 lbs.)
Gross Weight	Approximately 113 kg (250 lbs.)

*Depends upon size of container opening

**Larger sizes with optional change parts please consult us

Specifications subject to change without notice

NOTE — DIMENSIONS ARE GIVEN IN INCHES/MILLIMETERS

