

# Scotty Wrap

the lowest priced  
intermediate horizontal  
wrapping machine



*Packaging - Processing*

**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)


**Doboy**

# Doboy Scotty Wrap

Doboy breaks the price barrier with a horizontal wrapper that can do most of the operations that its big brothers can do. Handles 15 to 45 packages a minute with variable speed drive. Packages can range from 1" to 5 1/2" in width and 1/16" to 2 3/4" in height. Singles, multiples and trays are handled "GENTLY" in a horizontal "flo-thru" action. No twists and turns to cause damage to fragile products.

Virtually all heat-sealing materials can be used, such as cellophane, polycel and poly coated papers.

- 1 Adjustable HEAT CONTROLS for fin wheels and crimpers.
- 2 Rigid PARENT ROLL BACKSTAND utilizes automatic tensioning arm and surface compensating drag brake system.
- 3 FORMER is designed for simple and quick changeover to change package girth.
- 4 HORIZONTAL "flo-thru" OPERATION . . . No twists, turns, or elevation changes in product flow assures gentle handling of fragile products.
- 5 3' stainless steel INFEED CONVEYOR with flat top stainless steel chain. (5' optional)
- 6 CUTTING HEAD incorporates patented cam-thru cut-off knife that reduces maintenance.
- 7 One set of FIN SEAL WHEELS assures positive longitudinal seal. Feeding and tracking of wrapping material control from one point . . . no pressure on product. Irregular shapes do not affect speed or control of package. Wrapping material continues to track and remain in register even without product.
- 8 VARIABLE SPEED DRIVE with hand wheel adjustment offers stepless speed adjustment from 15 to 45 per minute. (22 to 60 per Minute Optional)
- 9 SPEED CHANGER adjusts crimper pause.
- 10 Adjustable PACKAGE LENGTH CUT-OFF.

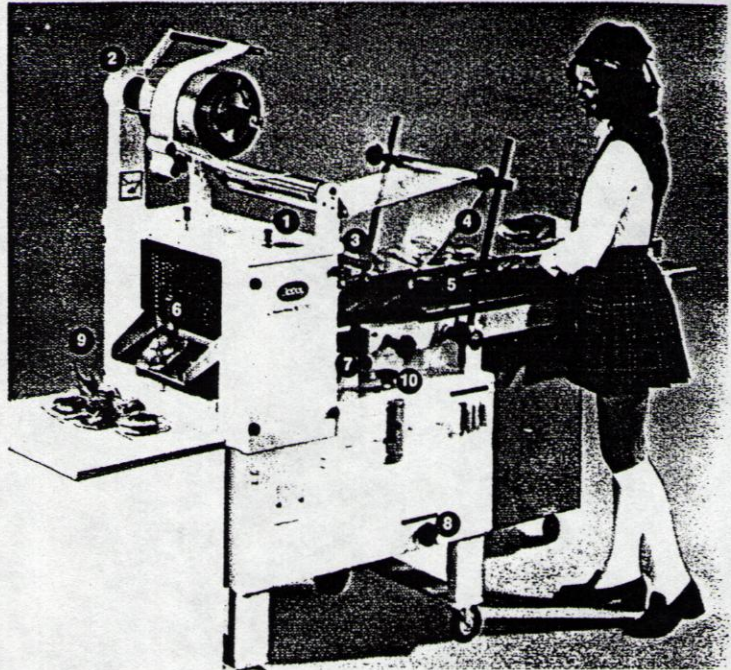

## ADDITIONAL SCOTTY FEATURES

**COMPACT DESIGN** — minimum floor space required.

**SPEED** — up to 45/min. Adjustable package length cut off.


**PRODUCT PROTECTION** — no feed rolls or tubing belts — therefore no undesirable pressure on product.

**COST**—low initial investment, low operating and maintenance cost.

**AVAILABILITY** — standard basic design assures fast delivery.

**QUICK CHANGEOVER** — rapid adjustment—fewer change parts.

**SEAL** — longitudinal seal on bottom of pack . . . no unsightly seam on top to detract from product.

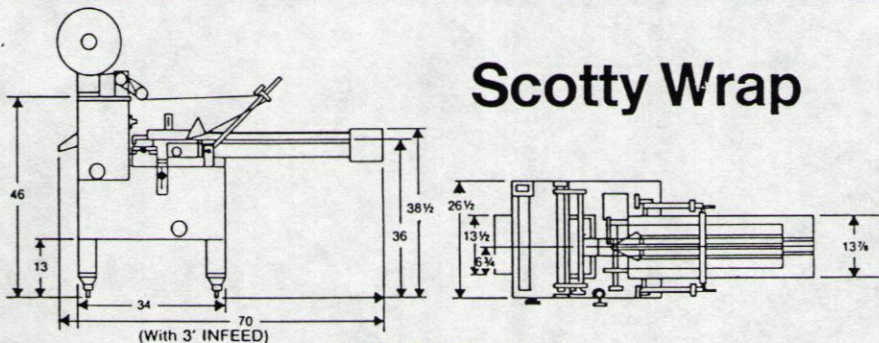

## Scotty Wrap

### PRODUCT SIZE RANGE

LENGTH . . . . . 4" to 15"	HEIGHT . . . . . 1/16" to 2 3/4"
WIDTH . . . . . 1" to 5 1/2"	WEB WIDTH . . . . . up to 16"

If your packaging requirements exceed these specifications, choose the Doboy Super Mustang or H-400 Horizontal Wrapper.

### OPTIONS AT EXTRA COST

Extra former, extra flat top chain, spare parts kit, casters, electric eye.  
Product discharge conveyor.

Machine specifications illustrated or described herein subject to change without notice.

**CONSTRUCTION** — strong tubular frame with castings in critical stress areas. Infeed conveyor is stainless steel and meets the most rigid sanitary requirements. Shafts and drives are selected alloyed steels. All moving parts are set on ball bearings.

**WEIGHT** — Approximately 725 pounds.

**OUTER DIMENSIONS** — 52" high x 74 1/2" long x 26 1/2" wide.

**ELECTRICAL** — 230 volts, 60 cycle, single phase; 11.7 amp; 1/2 HP drive motor. All wiring is done in Doboy plant to meet National Electric Code and National Electrical Manufacturers Association standards.

**NOTE** — Factory trained servicemen are available for machine installation and service. All parts stocked at New Richmond plant.



Doboy Packaging Machinery, Inc  
New Richmond, Wisconsin 54017  
Telex 290475 • (715) 246-6511

Packaging — Processing  
**Bid on Equipment**

1-847-683-7720

www.bid-on-equipment.com