

741V Needle valve system for precise, consistent fluid control.

accelerators
marking inks
silicone oils
solvents
uv-cure adhesives



The 741V Series valve design applies low viscosity assembly fluids with accurate, extremely close repeat deposit control.

Spring-loaded Teflon® needle packings compensate for wear and significantly reduce maintenance downtime. Because the stainless steel needle shutoff is at the dispense tip adapter, there is virtually no dead fluid volume in the valve.



“We needed something that was accurate, repeatable and easily validated, and we found it. We’re very pleased with the accuracy of these systems, particularly with their repeatability.”

Retractable Technologies, Inc.

Features

- Adjustable fluid flow control
- Unaffected by entrapped air in fluid
- Zero dead fluid volume
- Fluid input up to 300 psi (20.7 bar)
- Positive shutoff
- Cycle rate exceeds 400/minute
- Low-maintenance design

Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com


www.efd-inc.com info@efd-inc.com USA 800-556-3484 Europe +44 (0) 1582 666334 Asia +86 (21) 3866 9006

Sales and service of EFD® dispensing systems are available worldwide.

Needle valve systems

The complete system includes the 741V dispense valve, ValveMate™ 8000 controller, the fluid reservoir and dispense tip.

Expert technical assistance and high quality standards ensure productive, trouble-free performance. EFD offers a full line of reliable dispensing systems to meet your specific application requirements.

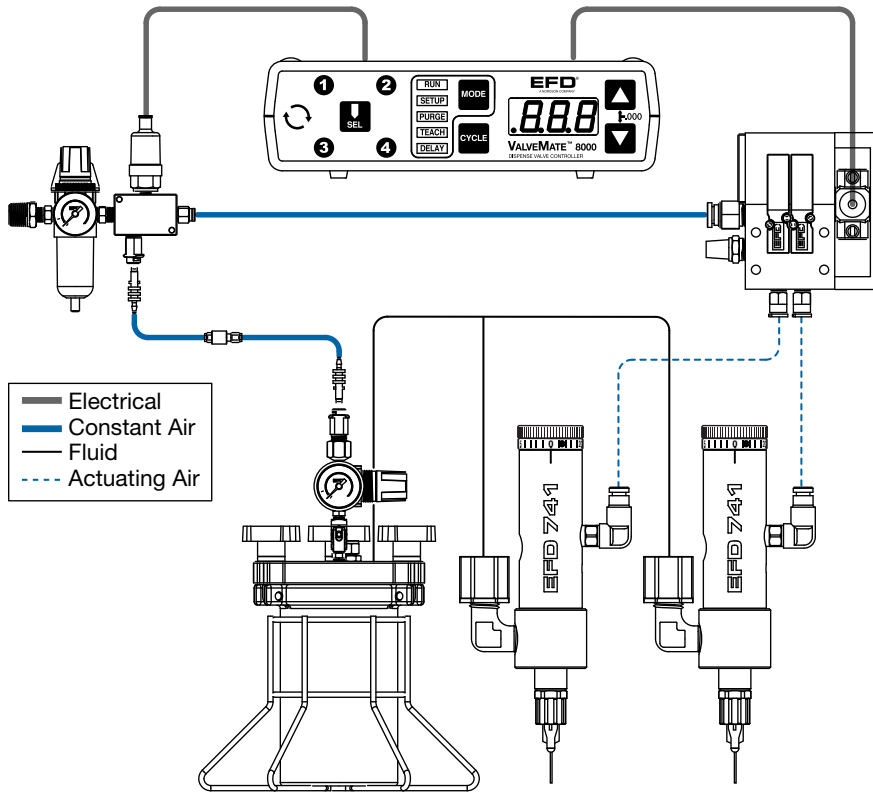

ValveMate 8000 Controller

Valve open time is the primary control of deposit size. The ValveMate controller puts push-button adjustment of valve open time where it needs to be — near the valve.

- Multi-valve control- up to (4) valves
- Partner to Programmable Logic Controller (PLC)
- Easy deposit size control
- Increased production output
- End user convenience
- Maximum machine efficiency

Optional: XYZ Dispensing System

The EFD TT xyz dispensing system incorporates all functions of the ValveMate. Compact 3-axis tabletop system offers consistent deposit repeatability. Work area: 325 x 325 x 100 mm or 525 x 525 x 100 mm.

Fluid Reservoirs

EFD reservoirs are supplied with precision, constant-bleed regulators to ensure consistent fluid pressure to the valve.

Tank reservoirs are available in 1.0, 5.0 and 19.0 liter capacities. Optimum™ Retainer Systems and Cartridges are available from 2.5 to 32 ounces (75cc to 950cc).

741V Series Valves


The 741V Series valves are used with the 8000 controllers or EFD TT automation system for precise, repeatable outputs of low to medium viscosity fluids.

During operation, controlled pulsed air acts on the piston to withdraw the needle a preset distance from the needle seat to provide exact, repeatable fluid flow.

- Size: 114.6 mm x 26.9 mm (4.51" x 1.06") diameter
- Weight: 741V-SS: 317.5 grams (11.2 oz)
741V: 158.8 grams (5.6 oz)
- Actuating air pressure required: 70 to 90 psi (4.8 to 6.2 bar)
- Maximum input fluid pressure: 300 psi (20.7 bar)
- Fluid inlet thread: 1/8 NPT female
- Fluid outlet: Male luer lock
- Mounting: 1/4-28 UNF tapped hole
- Cycle rate: Exceeds 400/minute
- Air cylinder body: 741V-SS: Type 303 stainless steel
741V: Hard-coated aluminum
- Fluid body: 741V-SS: Type 303 stainless steel
741V: Hard-coated aluminum

- Piston: Type 303 stainless steel
- Needle: Type 303 stainless steel
- Tip adapter/needle seat: Type 303 stainless steel
- SafetyLok™ collar: Nylon
- Needle packings: Teflon®

Note: All stainless steel parts are passivated.
 For tamper-resist model specify part #741V-TR or 741V-SS-TR.

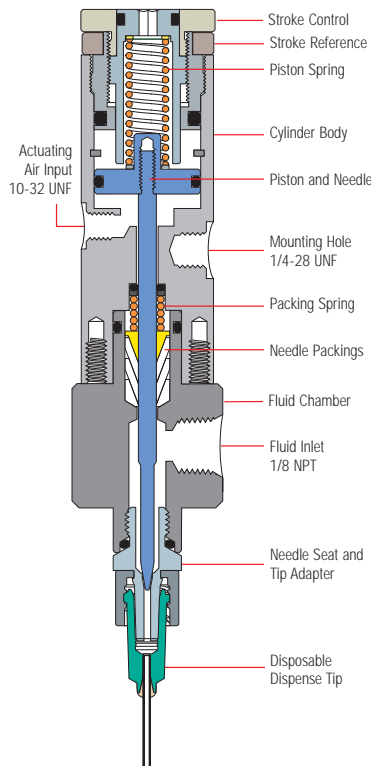

741V-SS
 75% actual size

Dispense Tips

Tip selection is critical to achieve optimum valve performance. 741V Series valves are packaged with an Ultra dispensing tip kit for maximum fluid control. The kit includes precision stainless steel tips in sizes from 22 to 32 gauge, a 33 gauge chamfered tip, and tip caps.



For EFD sales and service in over 30 countries, contact EFD or go to www.efd-inc.com

EFD, Inc.
 East Providence, RI USA
 USA & Canada: 800-556-3484; +1-401-434-7000
info@efd-inc.com www.efd-inc.com

EFD International Inc.
 Dunstable, Bedfordshire, UK
 0800 585733 or +44 (0) 1582 666334
 Ireland 00800 8272 9444
europe@efd-inc.com www.efd-inc.com

EFD, Inc., Asia
 China: +86 (21) 3866 9006
china@efd-inc.com www.efd-inc.com/cn
 Singapore: +65 6796 9522
sin-mal@efd-inc.com