




Plugger

Vibratory feed system orientates plugs into place on the top section of the star wheels. As the container enters the star wheels, the plate between the plug and container is removed and the plug is pushed into place. Operation is

a continuous motion. Quick changeover of star wheels and chute feed system for varying bottle sizes.

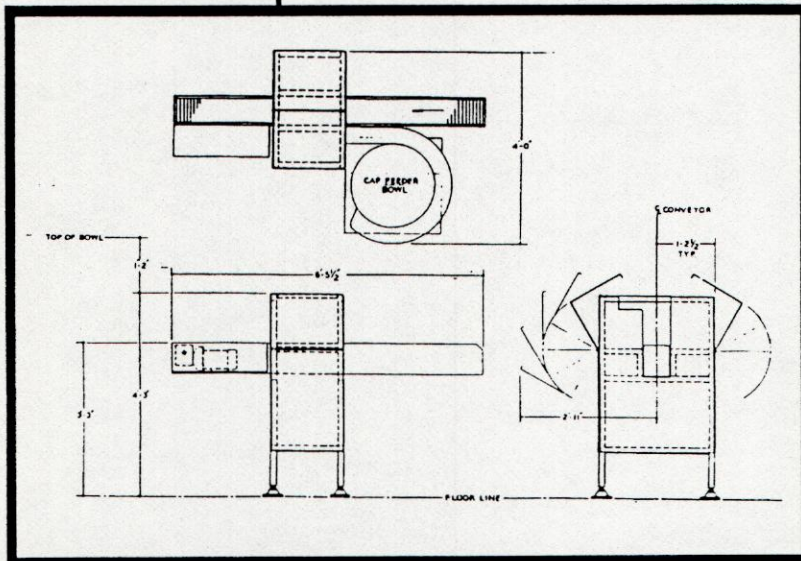

Plugger

SPECIFICATIONS

- **Dimensions:** width- 77 1/2" height- 65" depth- 48"
- **Frame:** ..304 stainless steel frame & covers with wheels & leveling legs.
- **Air Requirements:** 80-100 PSI, 3-5 CFM (5.5-7 bar, 0.9-1.5M / min).
- **Electrical:** 110v, 60 hz, single phase (or as required).
- **Speed:** Star wheel feed & 5 foot conveyor have independent variable speed controls for optimum output capability.
- **Includes:**
CONVEYOR: 5' (1.5M) stainless steel variable speed drive power.
FEED: ..304 stainless steel construction vibratory style orientator with adjustable air jets and guides (or as required).

NOTE: Evaluation & testing of samples required prior to construction to determine speeds, flexibility, final price and delivery.