


DH Water Condensing Extra Low Temperature Chiller Specifications

Two-Stage Semi-Hermetic compressors, R-22 refrigerant

Model	Units	50WCXLT	75WCXLT	100WCXLT	200WCXLT
Capacity @ 0 F (-17.8 C)	BTU/Hr	31,000	37,000	48,000	100,000
Capacity @ -10 F (-23.3 C)	BTU/Hr	26,000	31,000	40,000	85,000
Capacity @ -20 F (-28.8 C)	BTU/Hr	21,000	25,000	32,000	70,000
Capacity @ -30 F (-34.4 C)	BTU/Hr	17,500	20,000	26,000	57,000
Capacity @ -40 F (-40.0 C)	BTU/Hr	13,000	16,000	21,000	45,000
Capacity @ -50 F (-45.5 C)	BTU/Hr	10,000	13,000	17,000	32,000
Compressor HP	HP	5	7.5	10	20
Standard Pump HP	HP	1/2	1/2	1	2
Condensator Flow Rate					
City Water	GPM	2	2.5	3	5.5
Tower Water	GPM	8	10	12	22
Condensator Connections	Inches	3/4	3/4	3/4	1 1/2
Process Connections	Inches	1	1	1 1/4	1 1/4
Full Load Current					
208/230V-3-60	Amps	19.6	30	37.3	61.4
460-3-60	Amps	8.3	14.5	20.1	28.9
Tank Size	Gal	6	6	19	30
Physical Size					
Length	Inches	50	55	55	72
Width	Inches	28	28	29	32
Height bolt down (with casters)	Inches	53 (57)	53 (57)	53 (57)	55 (60)
Approx Shipping Wt	Pounds	900	1000	1050	2100


Pump Performance

1/2 and 1 Horsepower

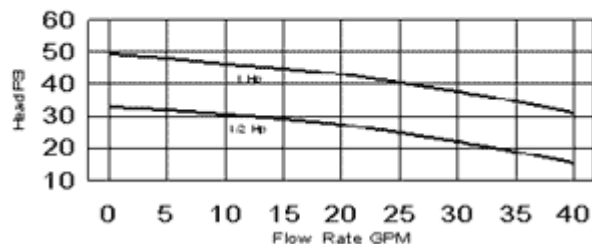

Pump Performance

2 and 3 Horsepower

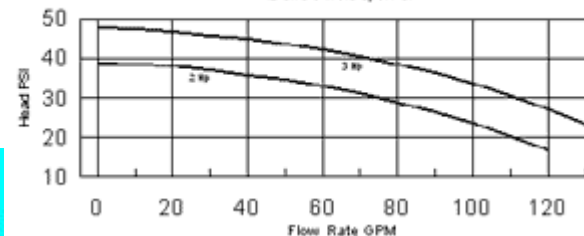

Packaging - Processing
Bid on Equipment
 1-847-683-7720
www.bid-on-equipment.com