


HayssenSandiacre

6 Cup Volumetric Feed System

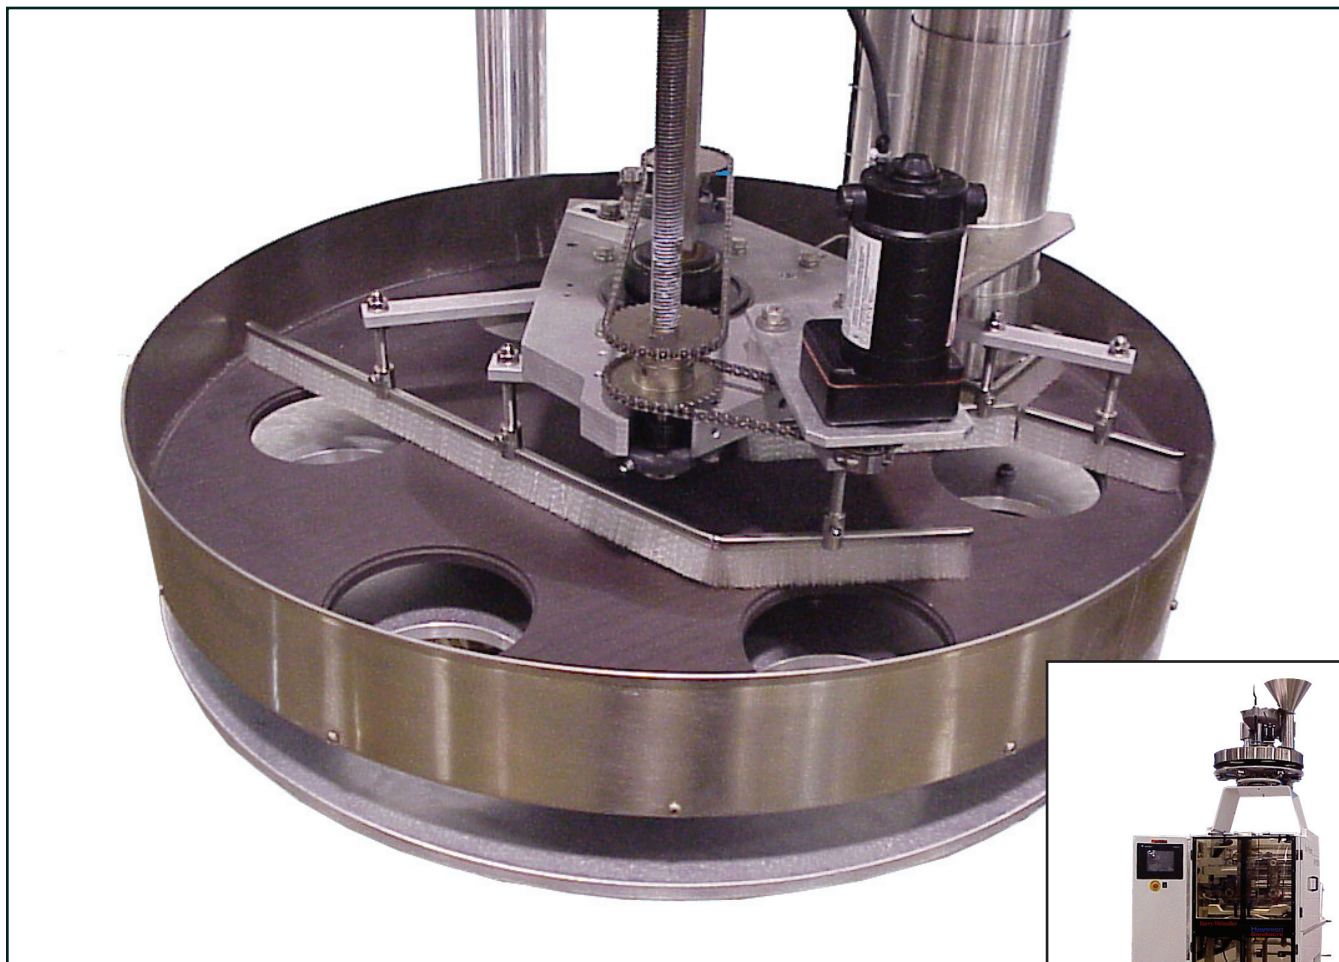

Key Features

- 6 adjustable cups
- Cup volumes – up to 250 cubic inches (4,097cc)
- Bottom plate remains in fixed position resulting in the minimum drop height regardless of product volume
- Sliding trap doors controlled by closed cam (no springs)
- Customized cups adjustable to 30% of mid-volume
- Continuous motion
- Volume adjustment made from control panel

Barry-Wehmiller

6 Cup Volumetric Feed System

Trap Doors

- Horizontally opening trap doors
- Operated by a cam follower in a close track
- Assures high speed opening and controlled closing
- Produces a more consistent and timed product discharge
- Sliding motion of the doors provides self-cleaning action and assures more accurate fills

Volume Adjustments

- DC motor with panel-mounted control provides motorized volume adjustment by raising or lowering the upper turret plate without stopping the machine, thus maintaining a constant drop height
- Adjustments may also be made manually by turning a handwheel
- Cup sets are interchangeable by simply removing the retaining "O" ring

Construction

- All parts in contact with product are stainless steel, coated aluminum, or FDA-approved plastic
- All fasteners are stainless steel

Options*

- Double discharge
- Tapered cups
- Knock-out devices
- Various coatings
- Level controls
- Various Surface Treatments

**Upon review of product(s) to be packaged, the HayssenSandiacre engineering department specifies required accessories and recommends suitable options.*



Latin America

Castorena 324-118, Cuajimalpa, 05000
Mexico, D.F.
Ph. +52(55)58137770
salesla@hayssensandiacre.com

Europe

101 Lilac Grove, Beeston, Nottingham
NG9 1PF United Kingdom
Ph. +44 (0) 115 967 8787
sales@hayssensandiacre.co.uk

HayssenSandiacre

225 Spartangreen Blvd., Duncan, SC 29334 • +1 (864) 486-4000
sales@hayssensandiacre.com • www.hayssensandiacre.com