


Computer Combination Net Weigh Scales

Yamato DATAWEIGH® SIGMA PLUS™ Series



Features:

- AICC (Advanced Interactive Control Console) with color touchscreen, 100 program capability, and data printer
- Programmable stepper motor actuation
- Plug-in electronics - actuator module
- Buckets designed with 1.5 mm thick stainless steel with wide radius corners
- Stainless steel product contact surfaces
- Fast clean-up (IP65 standard)
- Interchangeable linear feed pans
- Programmable in up to seven languages
- Multiple troubleshooting screens
- Single or dual discharge
- No-tool changeover

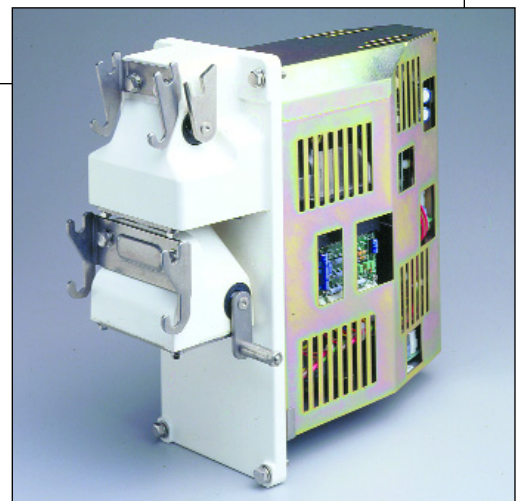

Barry-Wehmiller

Computer Combination Net Weigh Scales Yamato DATAWEIGH® SIGMA PLUS™ Series

Models Available:

<i>Model</i>	<i>Weigh Heads</i>	<i>Max. Weight</i>	<i>Max. Speed</i>	<i>Volume Per Pack</i>	<i>Configuration</i>
410SD & 410SW	10	1,000g	120	2,000cc	single
410MD & 410MW	10	1,000g	150	2,000cc	single
414SD & 414SW	14	1,000g	160	2,000cc	single
416SW	16	1,000g	65 x 2	2,000cc	twin
416MD & 416MW	16	1,000g	110 x 2	2,000cc	twin
420MD & 420MW	20	1,000g	120 x 2	2,000cc	twin
508MD & 508MW	8	2,000g	100	5,000cc	single
510SD & 510SW	10	2,000g	60	5,000cc	single
514SD & 514SW	14	2,000g	120	5,000cc	single
516MD & 516MW	16	2,000g	95 x 2	5,000cc	twin
520MD & 520MW	20	2,000g	110 x 2	5,000cc	twin
524MD & 524MW	24	2,000g	110 x 2	5,000cc	twin
710SD & 710SW	10	3,000g	50	10,000cc	single
714SD & 714SW	14	3,000g	90	10,000cc	single
714MD & 714MW	14	3,000g	70 x 2	10,000cc	twin
716MD	16	3,000g	100	10,000cc	mixing
724MD	24	3,000g	100	10,000cc	mixing
814SD & 814SW	14	5,000g	80	16,000cc	single
814MD	14	5,000g	130	16,000cc	single

Note: Speed, weight, and volume listed are standard. Other ranges are also available when required. Please contact factory for details. Max. and min. weights may vary according to local regulation.

Options:

- NETWORK AND INTERNET CAPABILITIES ■ SPECIAL PRODUCT INFEEDS ■ EMBOSSED PRODUCT CONTACT SURFACES ■ USDA APPROVED, U.L. APPROVED, AND WDA ACCEPTED MODELS ■ IP65 WASHDOWN ■ MIXING AND COUNTING
- SALAD/SPINACH MODELS ■ CEREAL MODELS
- IQF/FROZEN MODELS ■ FRAGILE PRODUCTS MODELS ■ STICKY PRODUCTS MODELS ■ DATA ACQUISITION ■ MEZZANINE OR SUPPORT LEGS

Power Requirements:

230 vac, single phase, 50 or 60 hz, 20 amp service

Air Requirements:

None

Production Rate:

Up to 240 weighments per minute
(dependent upon product characteristics and total weight)

Accuracy:

Average giveaway of less than 1 gram
(dependent upon product characteristics and total weight)

HayssenSandiacre

USA - 225 Spartangreen Boulevard • Duncan, SC 29334 USA • 864/486-4000
 UNITED KINGDOM - 16 Roman Way • Thetford, Norfolk IP24 1XB United Kingdom • + 44 (0) 1842 754171
 UNITED KINGDOM - 101 Lilac Grove • Beeston, Nottingham, NG9 1PF • United Kingdom • +44 (0) 115 967 8787
 MEXICO - Castorena 324-118 • Cuajimalpa • 05000 México, D.F • +52(55)58137770
www.hayssensandiacre.com • sales@hayssensandiacre.com