


HEM & SAW

—The saw that cuts straight.—

Dual Column DC-2038RB1

Capacity: 20" H x 38" W @ 90°
20" H x 24" W @ 45°
(Both Directions)
20" H x 16" W @ 60°
(One Direction)
Blade Size: 2" x 24'8" x .063"
Motor: 15 HP
Hydraulics: 5 HP

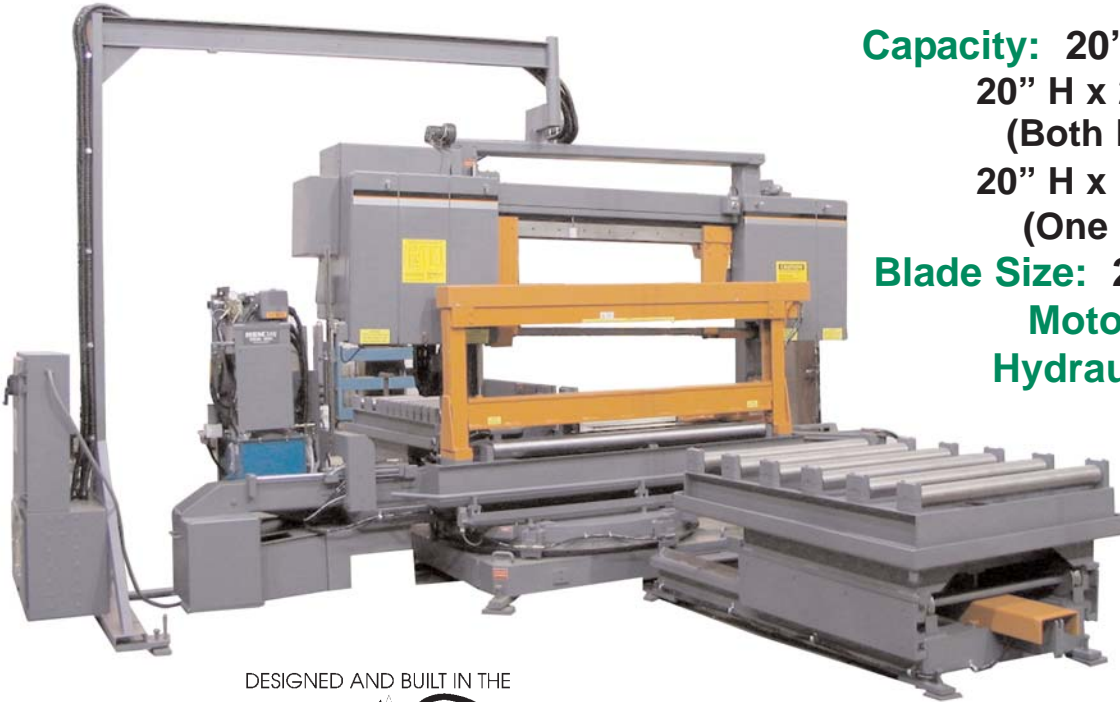

DESIGNED AND BUILT IN THE
U.S.A. 

**Shown w/ Optional Top Clamp & Optional Telescoping Roller Tables*

Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com

Standard Features:

Pedestal Console - Manual control
w/ 30' Umbilical
Rotary Table for Base to Pivot
2 Degree Arm Cant
Vising on Both Sides of Blade
Moveable Guide Arm from Console
Adjustable Clamping Pressure (0-2,500 lbs.)
Powered Miter Controlled From Console
Flood Coolant System
Electronically Controlled Traverse (ECT)
Controls Feed Rate & Cutting Force
Carbide Blade Guides
Powered Blade Brush
Automatic Shut Off If Blade Breaks
Powered Blade Tension
Infinitely Variable Blade Speed (75-400 SFPM)
LED Blade Speed Readout w/ Blade Stall



Optional Features:

- Cut Watcher System
- Roller Table - Input Side (Telescopes)
- Roller Table - Output Side (Telescopes)
- Semi-Automatic Operation
- Computer Controlled Traverse (HCCT)
- Chip Conveyor System
- Top Clamp (Available Input & Output Sides)
- Laser Light System
- Spray Mist Coolant System

www.hemsaw.com

P. O. Box 1148 • Pryor, OK • 74362

Toll Free: (888) 729-7787 • Phone: (918) 825-4821

Fax: (918) 825-4824 • E-Mail: info@hemsaw.com