

**Packaging - Processing**  
**Bid on Equipment**

1-847-683-7720

www.bid-on-equipment.com



**The premier heavy-duty form-fill-seal thermoform packaging machine**

The 1000-D Ultimate has been the standard of high speed roll-stock thermoformers. It is engineered for trouble-free dependability, versatility and high speed consistency.

The 1000-D successfully meets the packaging requirements for a wide range of meats, cheese and various other foods.

**Multiple packaging output: Up to 200 packages per minute**

The 1000-D cycles up to 20 indexes per minute and, depending on product size, can deliver over 200 packages per minute.

**Only minutes to changeover for package size and shape**

Hooper has designed their tooling for fast interchangeability of forming tools and sealing tools with simple adjustments for pitch and depth. Product dividers allow several product sizes to be packaged on the 1000-D Ultimate.

**High vacuum, strong seals**

The 1000-D Ultimate's vacuum levels are consistently high. Seals are broad and strong. Hooper's unique forming system reduces thinning in the formed film corners.

**Standard equipment**


- Solid-state D.C. Motor Drive—Geneva
- Trim Removal System—Two Slitters
- Photo Electric Registration—Top Web
- Spare Parts Kit.

**Optional equipment**

- Vacuum Station
- Gas Flush
- Hole Punch
- Plug Assist
- Matching Die
- Perforation Assembly
- Conveyors
- Auto Loading Support
- Code Dating
- Pre-Heaters
- Vacuum Pump
- Contour Cutting

**Hooper Inc.** 1772 Armitage Court  
Addison, IL 60101  
(312) 953-2750 • Telex 728365

**MODEL 1000-D ULTIMATE**

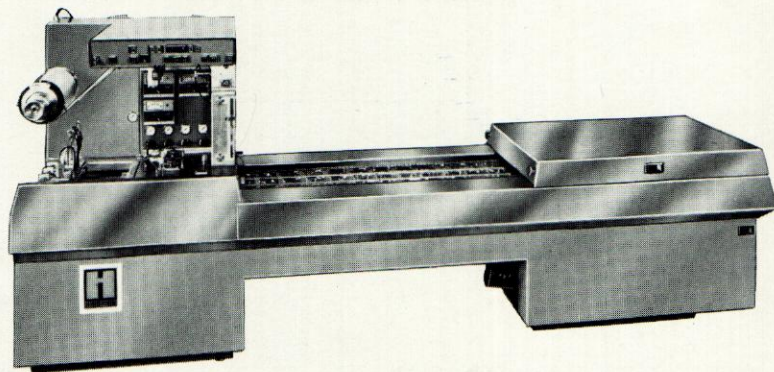

**Specifications**

**Package sizes**

The 1000-D Ultimate has a product area of 17½" x 14" with a 5" depth.

Product cavity (XMD): 9" min.—17½" max.

Product cavity (MD): 4" min.—14" max.

Cavity depth: 5" max.

Machine index: 5" min.—15" max.

Standard tooling increments: .166"

**Machine size**

Height: 6'2"

Width: 49"

Length: 15'2"

Weight: 3500 lbs. (approx.)

**Packaging materials**

Flexible and semi-rigid films, printed and unprinted, can be run on the 1000-D Ultimate.

Core dia. 3" or 6"

Max. std. dia. 18"

**Utilities**

Electrical: 230V, 60 HZ—3 phase, 55 amp.

Air: 25 CFM at 80 PSI.

Water: 20 GPH (approx.) at normal city pressure.

