

# CCW-Z-216B

Ultra-high speed double weigher capable of up to 180 weighings per minute. Its compact design and user-friendly touch screen operation make it ideal for all production environments where accuracy and performance are critical.



Booster Type Weigher




Dustproof Type



Plasma Touch Screen



Stepping Motor




Mix Weighing



System Engineered




Easy Cleaning and Maintenance

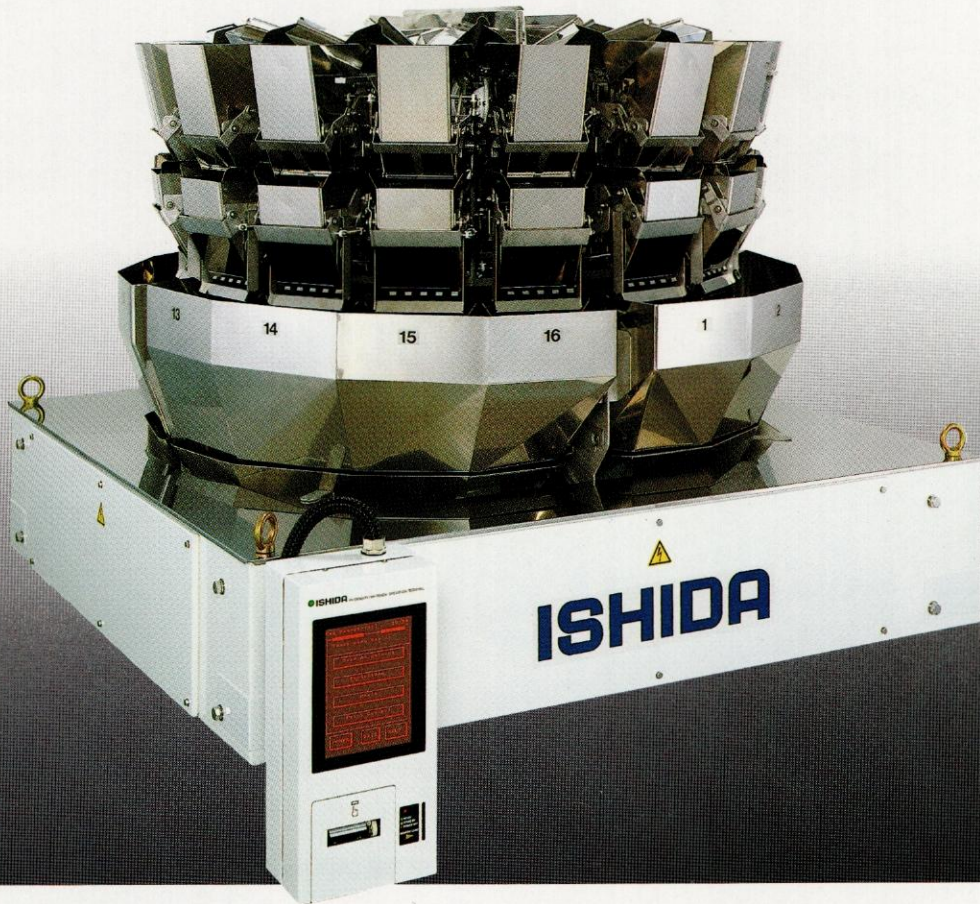

## DIMENSIONS

Units:mm

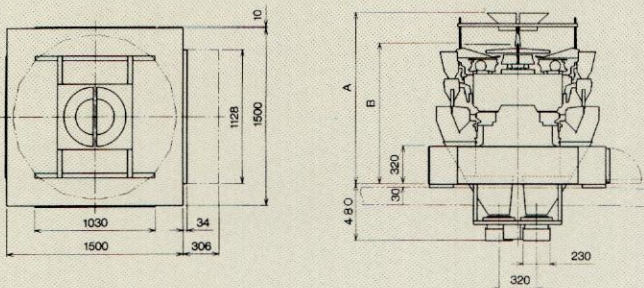

A:D/20=1450 B:D/20=1190  
:D/30=1645 :D/30=1385

## SPECIFICATIONS

Model	CCW-Z-216B-D/20		CCW-Z-216B-D/30	
Weighing Capacity	500g	1,000g	500g	1,000g
Weighing Range	14g to 500g	25g to 1,000g	14g to 500g	25g to 1,000g
Accuracy for Single Product (*)	$\bar{X} < 1.0g$ (Max.)	$\bar{X} < 2.0g$ (Max.)	$\bar{X} < 1.0g$ (Max.)	$\bar{X} < 2.0g$ (Max.)
Maximum Volume for Weighing	3,000 cc (per single dump)		4,500 cc (per single dump)	
Weighing Speed(**)	up to 180 W.P.M.		up to 160 W.P.M.	
Controller	16 bit microprocessor			
Weigh Cell	Double-beam strain gauge load cell			
Target Weight Setting	Digital entry via touch screen panel			
	(Minimum Graduation)		(Minimum Graduation)	
	0.1g	0.2g	0.1g	0.2g
Weight Display	Plasma			
Material	Product contact surfaces are made of stainless steel or other sanitary materials.			
Options	Various options are available. Please contact Ishida distributors.			

NOTE: Specifications subject to change without notice.

(\*) : Depends on target weight, weighing speed and conditions.

(\*\*) : Depends on product shape, product density, target weight, etc.

**Packaging - Processing**  
**Bid on Equipment**

1-847-683-7720

www.bid-on-equipment.com