



CCW-Z-216B-WP

Waterproof, ultra-high speed double weigher, with all the features and benefits of the CCW-Z-216B. Its streamlined, durable construction meets international waterproof standards IP65 and USDA approval.



DIMENSIONS

Units:mm

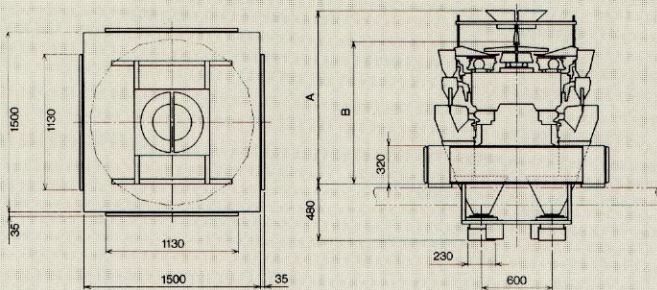

A:S/20=1450 B:S/20=1190
:S/30=1645 :S/30=1385

SPECIFICATIONS

Model	CCW-Z-216B-D/20-WP		CCW-Z-216B-D/30-WP	
Weighing Capacity	500g	1,000g	500g	1,000g
Weighing Range	14g to 500g	25g to 1,000g	14g to 500g	25g to 1,000g
Accuracy for Single Product (*)	$\bar{X} < 1.0g$ (Max.)	$\bar{X} < 2.0g$ (Max.)	$\bar{X} < 1.0g$ (Max.)	$\bar{X} < 2.0g$ (Max.)
Maximum Volume for Weighing	3,000 cc (per single dump)		4,500 cc (per single dump)	
Weighing Speed(**)	up to 180 W.P.M.			
Controller	16 bit microprocessor			
Weigh Cell	Double-beam strain gauge load cell			
Target Weight Setting	Digital entry via touch screen panel			
	(Minimum Graduation)		(Minimum Graduation)	
	0.1g	0.2g	0.1g	0.2g
Weight Display	Plasma			
Air Purge Supply	Required air pressure - 5kgf/cm ² , 90 liters/min. (equivalent to 2.2 kw compressor) Air hose - PT3/8" (for air dryer connection) NOTE: Air compressor must be provided by the end user.			
Material	Main body - SUS 304, drive unit - anodized coating Dispersion feeder unit frame - fine ceramic with fluoroc resin Radial feeder unit frame - fine ceramic with fluoroc resin			
Options	Various options are available. Please contact Ishida distributors.			

NOTE: Specifications subject to change without notice.

(*) : Depends on target weight, weighing speed and conditions.

(**) : Depends on product shape, product density, target weight, etc.

Packaging - Processing
Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com