


Packaging - Processing
Bid on Equipment

1-847-683-7720


www.bid-on-equipment.com

Primary Applicators

The Label-Aire® Primary Applicators make labeling easier and faster... making you more profitable.



No matter which model you choose, Label-Aire Primary Applicators deliver on their promise of speed, accuracy, and ease of use. And that translates into lower operating costs and increased productivity for your business.

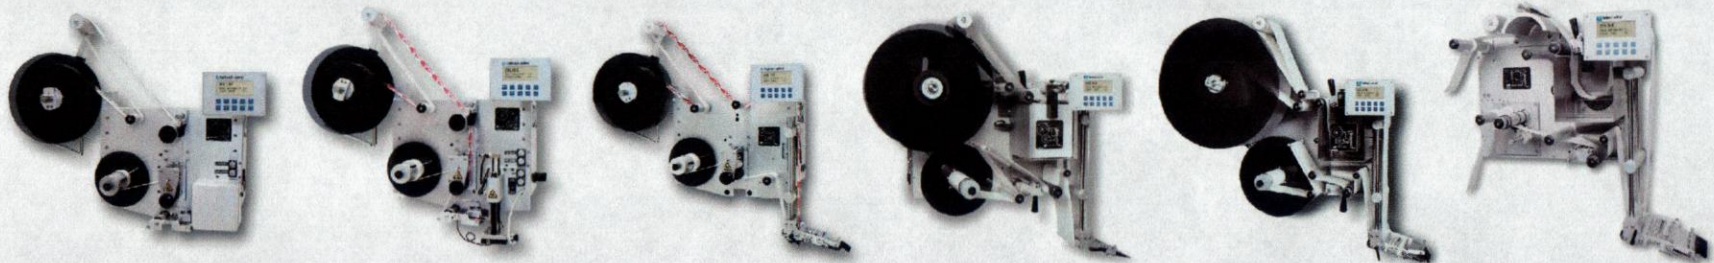

Standard Features Legend	3111 Air-Blow	3114 Tamp-Blow	3115 Wipe-On	3125 Wipe-On	3135 Wipe-On	3155 Wipe-On
Standard Features Legend <ul style="list-style-type: none"> ● Automatic setup ● Stepper motor drive ● R3 digital display ● Automatic Speed Following (ASF) ● Velocity Compensation ● Quick-action collapsible rewind ● Adaptable to air-blow or tamp-blow ● Adaptable to tamp-blow or wipe-on ● Adaptable to air-blow or wipe-on ● Loose loop de-tensioner Options Legend <ul style="list-style-type: none"> ■ 16" (406 mm) non-powered unwind ■ 10" (254 mm) Smart powered rewind ■ 6" (152 mm) label core adapter ■ Encoder kit for ASF or Velocity Compensation ■ Strobe signals¹ ■ T-Base Stand <small>1. "Low label" and "out of labels"</small>	3111 Air-Blow Easy air-blow labeling. A labeler that never touches your product? The result of many years of perfecting air-blow labeling technology, the 3111 is the pinnacle of non-contact labeling. Automatic setup, Velocity Compensation, stepper motor technology, label placement accuracy up to +/- 1/32" (.8 mm), and labeling speeds up to 1,500* (3,810 cm) of web per minute all work together to make air-blow labeling easy and easy on your bottom line.	3114 Tamp-Blow Advanced tamp-blow labeling technology. With standard tamp and dual action tamp configurations available, plus a variety of stroke lengths to choose from, the 3114 Tamp-Blow is one very versatile machine. Along with advanced features such Velocity Compensation and automatic setup, the 3114 labels at speeds up to 1,500* (3,810 cm) of web per minute. Advanced, versatile, and fast.	3115 Wipe-On Easy wipe-on labeling. The easy and affordable way to balance the demands of your operation and meet your bottom line. Along with advanced features such as Automatic Speed Following (ASF) and automatic setup, the 3115 Wipe-On labels at speeds up to 1,500* (3,810 cm) of web per minute. Wipe-on labeling has never been easier or more affordable.	3125 Wipe-On The workhorse labeler. Speeds up to 2,500* (6,350 cm) of web per minute and label placement accuracy up to +/- 1/64" (.4 mm) make the 3125 Wipe-On the ideal choice for demanding applications requiring high speed and precision. Like all of our primary applicators, the 3125 makes labeling easier and faster... making you more profitable. Advanced 24/7 wipe-on labeling.	3135 Wipe-On Accurate and faster labeling. The 3135 was built for higher speed applications. With label placement accuracy up to +/- 1/64" (.4 mm), speeds up to 3,500* (8,890 cm) of web per minute, and standard features such as ASF and automatic setup, the 3135 Wipe-On delivers on its promise of accuracy, speed, and ease of use. This is wipe-on labeling redefined.	3155 Wipe-On The ultimate wipe-on labeler. Have even faster labeling speed requirements? How does 5,000* (12,700 cm) of web per minute grab you? Like all Label-Aire products, the 3155 is built to meticulous quality standards and designed to withstand the most intense operation. Put the 3155 Wipe-On to work for you all day, every day. Labeling will never be the same.
Standard Features:	●●●●●●●●	●●●●●●●●	●●●●●●●●	●●●●●●●●	●●●●●●●●	●●●●●●●●
Standard Label Dimensions:	Max. Web Width: 4.13" (105 mm) Min. Web Width: .88" (22 mm)	Max. Web Width: 4.13" (105 mm) Min. Web Width: .63" (16 mm)	Max. Web Width: 7.13" (181 mm) Min. Web Width: .63" (16 mm)	Max. Web Width: 7.13" (181 mm) Min. Web Width: 1" (25 mm)	Max. Web Width: 7.13" (181 mm) Min. Web Width: 1" (25 mm)	Max. Web Width: 7.13" (181 mm) Min. Web Width: 1" (25 mm)
Dispense Speed:	Up to 1,500* (3,810 cm) of web per minute Up to 2,000* (5,080 cm) of web per minute with smart powered rewind	Up to 1,500* (3,810 cm) of web per minute Up to 2,000* (5,080 cm) of web per minute with smart powered rewind	Up to 1,500* (3,810 cm) of web per minute Up to 2,000* (5,080 cm) of web per minute with smart powered rewind	Up to 2,500* (6,350 cm) of web per minute	Up to 3,500* (8,890 cm) of web per minute	Up to 5,000* (12,700 cm) of web per minute
Label Placement Accuracy:	Up to +/- 1/32" (.8 mm)	Up to +/- 1/32" (.8 mm)	Up to +/- 1/64" (.4 mm)	Up to +/- 1/64" (.4 mm)	Up to +/- 1/64" (.4 mm)	Up to +/- 1/64" (.4 mm)
Options:	■ ■ ■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■ ■ ■

Consult factory for additional options.