



## 3138-N Merge

Printer Applicator

Model 3138-N Merge

Merge

  
**Packaging - Processing  
Bid on Equipment**  
1-847-683-7720  
[www.bid-on-equipment.com](http://www.bid-on-equipment.com)


## 3138-N Merge Printer Applicator Specifications

The Label-Aire® Model 3138-N Merge Printer Applicator prints and applies labels fast and accurately using Label-Aire's proven wipe-on labeling technology.

The Model 3138-N Merge Printer Applicator delivers on its promise of accuracy, reliability, and ease of use. That translates into lower operating costs and increased productivity for your business.

The advanced 3138-N Merge is Label-Aire's latest printer applicator featuring New Generation technology making it the ideal choice for the most demanding applications. The 3138-N Merge utilizes Label-Aire's wipe-on technology for fast, accurate, and versatile labeling. Advanced features include automatic setup with multiple programmable label pages for easy change-overs to labels of different sizes, rate compensation for improved label placement accuracy, and advanced user-configurable I/O connectivity. All these handy features greatly simplify setup and change-overs. The 3138-N Merge is just as tough as it is advanced. Its rugged stainless steel and anodized aluminum construction is corrosion resistant providing long-lasting durability and maintenance-free operation in the most hostile environments.

Like the rest of Label-Aire's printer applicator line, the Model 3138-N Merge is built to meticulous quality standards and designed to withstand the most demanding operation.

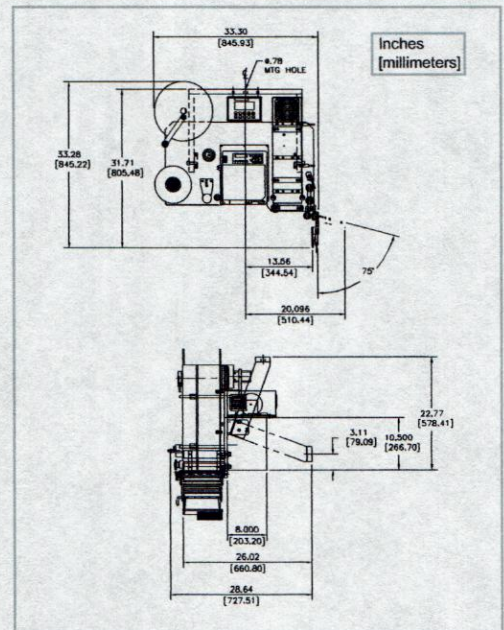

Stated dimensions are approximations. Please consult factory if dimensions are required for line integration.

### Dimensions:

Height: 33.3" (846 mm)  
Length: 33.3" (846 mm)  
Width: 28.6" (726 mm)

### Weight:

165 lbs. (75 kg)

### Standard Label Dimensions:

Label Width: Up to 7.2" (183 mm)  
Label Length: Up to 7" (178 mm)  
(Printer dependent)

### Dispense Speed:

Up to 25" (635 mm) per second when label storage box is full (depending on printer and label size)  
Up to 16" (406 mm) per second when label storage box is low (depending on printer and label size)

### Label Dispense Accuracy:

Up to +/- 1/32" (0.8 mm)

### Electrical:

115 Volts AC 60 Hz 5 Amps.  
220 Volts AC 50 Hz 5 Amps.

### Options:

Most O.E.M. print engines

**Consult factory for additional options.**

## 3138-N Merge Advanced Features

<b>Automatic setup</b>	Includes multiple programmable label pages for easy change-overs to different label sizes.
<b>Wipe-on technology</b>	This is accomplished by utilizing a label loop box for the storage of pre-printed labels.
<b>Automatic Speed Following (ASF)</b>	Provides accurately applied labels even through changes in product speed.
<b>Digital display</b>	Remote operator control capability.
<b>Flash memory</b>	Allows easy download of system software updates.
<b>Advanced I/O</b>	User-configurable for system output.



**Headquarters**  
550 Burning Tree Road  
Fullerton, CA 92833 USA

o 714.441.0700  
f 714.526.0300  
e info@label-aire.com  
w www.label-aire.com

**Europe**  
Sjællandsvvej 27A  
DK-9500 Hobro, Denmark

o +45.9657.0063  
f +45.9657.0064  
e info@label-aire.com  
w www.label-aire.com

**Asia**  
No. 10, Lane 228, Taisi S. Road  
Longjing Township  
Taichung County 434, Taiwan

o +886.4.2395.5684  
f +886.4.2395.8007  
e info@label-aire.com  
w www.label-aire.com

Distributed by:

**Packaging - Processing  
Bid on Equipment**

1-847-683-7720

www.bid-on-equipment.com