

## Case Erectors

Automatic Case Erectors

### Innovation

Designed to minimize your biggest problem -  
Machine Jams

#### Automatic Case Erector

Faster, safer, more productive  
than manually formed cases  
Fewer machine jams than  
other erectors in its class  
Compact, small footprint



C300

#### Quick and Easy for Operator

Ergonomic design of  
magazine allows easy  
loading of blanks


Adjustment wheels,  
counters, and "help"  
chart make case  
adjustments easy to do





C1000 / C2000




# CASE ERECTORS

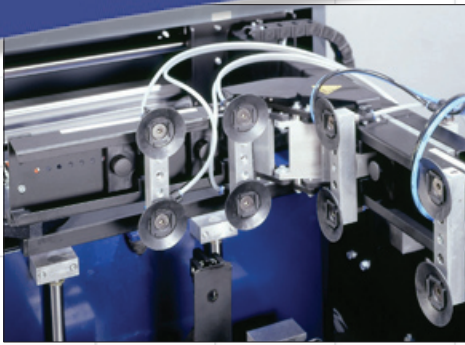

Unique hinged pickup and folding frame reliably opens cases by placing erecting frame suction cups on two panels of blanks **A**

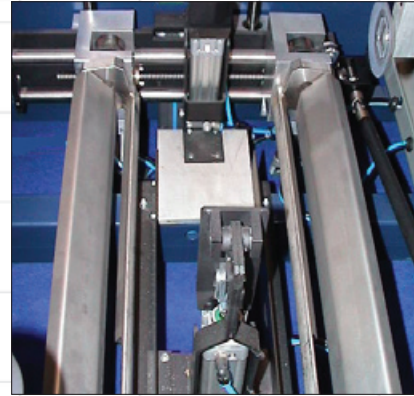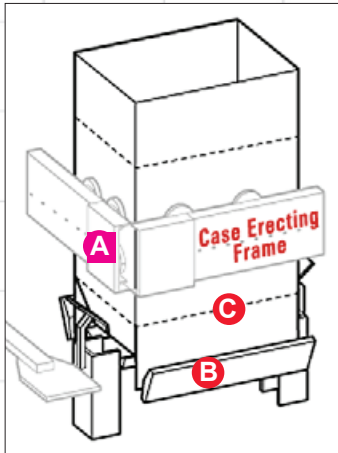


Innovative slotted flap folders fold majors along entire length for maximum control **B**



Belt driven exit drive pulls case over tape head or to glue station

## Eliminates Machine Jams

Erects cases with imperfect glue joints

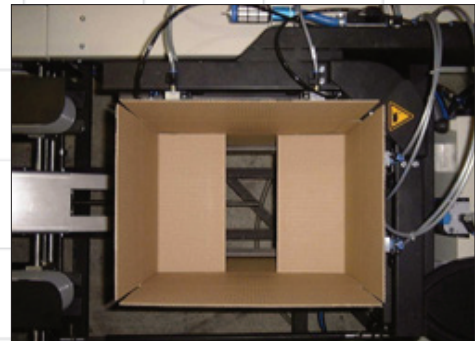

All flaps folded while case is held square in the erecting frame **C**

## Case Erector Specifications

### PERFORMANCE CRITERIA\*\*

- Throughput Speed
- Case Size Minimum (O.D.)

**C-300**  
 10 cases per minute  
 7 7/8"L x 5 7/8"W x 3 7/8"H

**C-1000**  
 15-22 cases per minute  
 7 7/8"L x 5 7/8"W x 3 7/8"H

**C-2000**  
 10-15 cases per minute  
 7 7/8"L x 5 7/8"W x 3 7/8"H

- Case Size Maximum (O.D.)

19 5/8"L x 13 3/4"W x 20 3/4"H

19 3/4"L x 12 3/4"W x 18 3/4"H

25 5/8"L x 17 3/4"W x 23 7/8"H

\*\* Minimum and maximum case heights vary depending on case widths.

### CASE CRITERIA

- Case Type
- Flute Type
- Wall Type

RSC, HSC  
 B, C  
 Single wall

RSC, HSC  
 B, C  
 Single wall (test for double wall)

RSC, HSC  
 B, C  
 Single wall (test for double wall)

### BOTTOM SEAL

- Bottom sealing method
- Tape Head

Tape  
 Lantech TH Series

Tape  
 Lantech TH Series

Tape  
 Lantech TH Series

### MACHINE SHIPPING WEIGHT

- Shipping Weight (including skid)

1400 lbs.

1600 lbs.

2000 lbs.

### SERVICE REQUIREMENT

- Air
- Electric

80 psi, clean dry air  
 230v, 3ø, 15amp, 60Hz

80 psi, clean dry air  
 230v, 3ø, 15amp, 60Hz

80 psi, clean dry air  
 230v, 3ø, 15amp, 60Hz

### WARRANTY

3 years  
 Unlimited cycles

3 years  
 Unlimited cycles

3 years  
 Unlimited cycles

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2006

