

LITTLE DAVID®




CF-30T Case Former with Pressure Sensitive Bottom Taper

The Little David® CF-30T Case Former is a completely automatic, compact case former designed to provide all the features found in larger, more costly machines. Engineered for 24/7 production, the CF-30T's compact frame allows it to be integrated into most production lines.

These are what make a quality, reliable Case Former:

- Calibrated Scales
- Powered Hopper
- Pneumatic Tuckers
 - Allen Bradley PLC
 - Quick Changeover
- Heavy Duty Steel Construction
- Continuous Motion Flight Bar

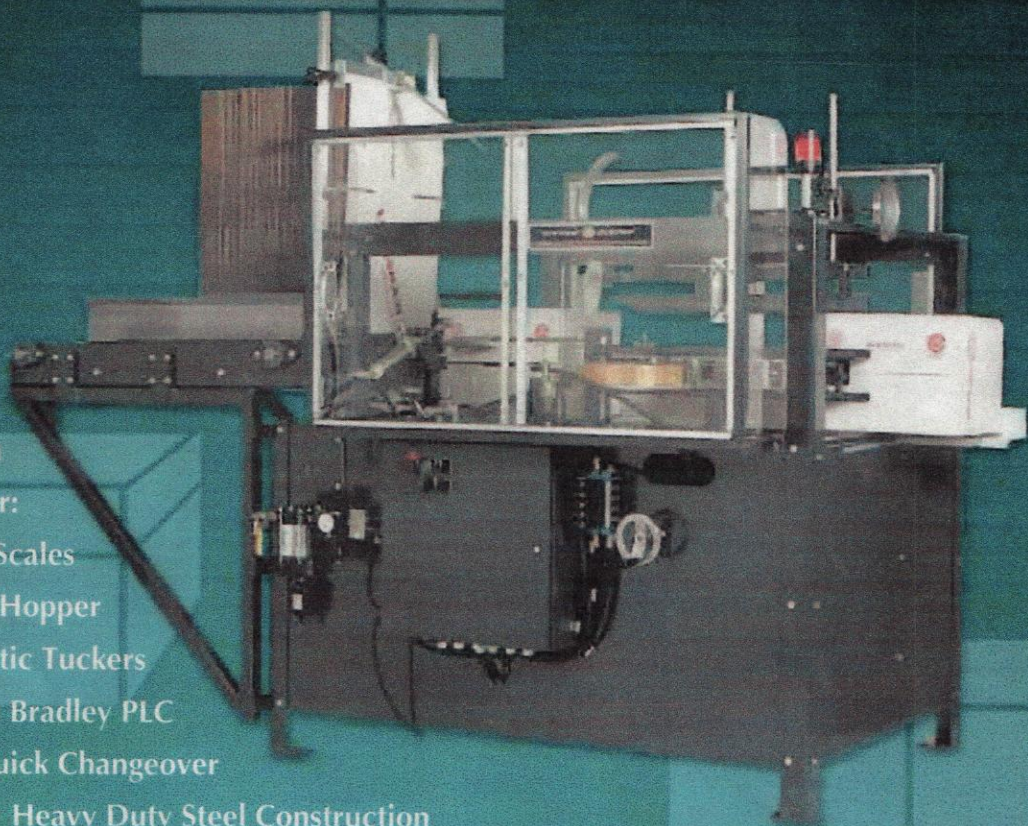

Packaging – Processing

Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

CF-30T

Squared Cases —

- Pusher bar provides positive drive, consistently squaring cases — avoids skewed cases caused by belt drives

No Down Time —

- Load-on-the-Fly Powered Hopper, with 95 RSC case capacity, prevents jams common to gravity hoppers
- Allen Bradley® PLC Controller standard, for precise control of all functions

Flexible —


- Case on Demand allows operator to control production rate
- Easy threading CaseLocker ST™ tape cartridge.

Quick Pay Back —

- Pneumatically tucked flaps eliminate carpal tunnel syndrome
- Positive pay back on volumes as low as 500 cases per day

Quick Changeover —

- Calibrated scales, rack & pinion, lock & slide adjustments plus set up chart allow for easy 5 minute case size change

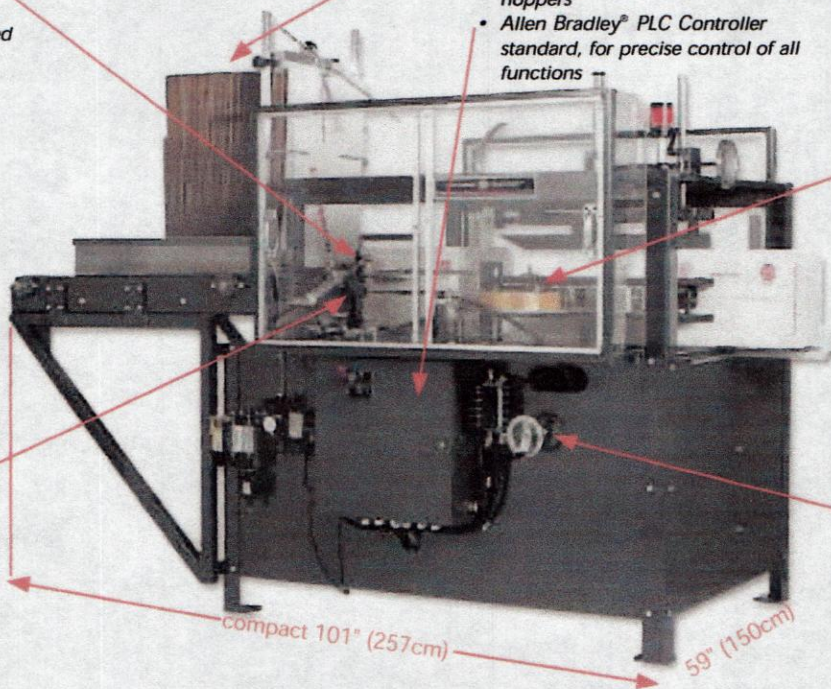

Specifications:

Power Requirements —

110 VAC, 60Hz, single phase, 10 Amps

Note: Other voltages available. Contact Loveshaw for details.

Air Requirements —

13 SCFM @ 80 psi

Tape Specifications —

Any commercially acceptable brand of pressure sensitive tape.

Width: 1-1/2" (38mm) to 2" (51mm) — 3" (76mm) optional

Tape Roll Diameter: 15" (381mm) maximum on a 3" (76mm) core

Roll Length: up to 2000 yards (1829m)

Production Rate —

CF-30T: Up to 10 cases per minute, depending on case size and corrugated quality

CF-30TXL: Up to 10 cases per minute, depending on case size and corrugated quality

Corrugated Orientation —

Printing on case must match the case orientation of the machine. Please refer to corrugated specification sheet for complete details.

Case Dimensions —

	CF-30T	CF-30TXL
Length:	8" - 18" 203mm - 457mm	11" - 20" 279mm - 508mm
Width:	8" - 15" 203mm - 381mm	8" - 20" 203mm - 508mm
Height:	6" - 15" 152mm - 381mm	9" - 20" 229mm - 508mm

Note: Certain combinations may be unstable and therefore can not be processed on the CF-30T.

Weight —

1000 lbs (455kg) uncrated

Options

- Spare Parts Kit
- Special Electrics
- Custom Color
- Interlocking Gates
- Extended Capacity Powered Hopper
- Casters
- Custom Height
- Stainless Steel
- Box Jam Warning
- Low Tape Warning
- Low Hopper Warning
- Automatic Central Lube
- Available in CE, NEMA 4X
- Consult Price List for Full Options Listing



LOVESHAW **LOVESHAW Europe**
an ITW Company A Division of ITW Ltd.

LITTLE DAVID PRODUCTS DIVISION
Route 296 Box 83
South Canaan, PA 18459
(570) 937.4921 Fax (570) 937.3229
1(800) 572.3434

Unit 9 Brunel Gate,
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SL
Tel: (1264) 357511 Fax: (1264) 355964

visit
www.loveshaw.com



Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com