

MIXCO™ Batch Mixers

BATCH
MIXERS




MIX VOLUMES UP TO 200 GALLONS. (500 GALLONS WITH GEAR BATCH MIXER) LIGHT OR INTERMITTENT DUTY.

- 20° offset mounting clamp automatically positions for Angular Off-Center mounting in an unbaffled tank.
- Aluminum housing and clamp assembly are standard.
- Provided with 5/8" x 36" stainless steel shaft with 3.6" SuperPitch® propeller. (7.7" SuperPitch Propeller Provided on Gear Batch Mixer)
- Optional bung adapter. (Not available on Gear Batch Mixer)

MARK I

Capacitor start, 1/4 hp. motor with sealed ball bearings. TENV. Delivers steady 1725 rpm. on 115 volt, 60 Hz. Integral on/off switch with 7' cord and 3-prong plug. Weight 40 lbs.

MARK II Open, split phase, 1/4 hp. motor with sleeve bearings. Delivers steady 1725 rpm. on 115 volt, 60 Hz. Integral on/off switch with 7' cord and 3-prong plug. Weight 45 lbs.

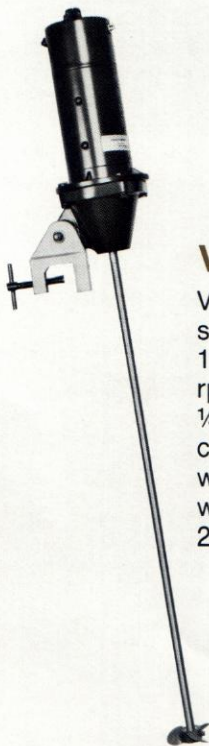

VARI-BATCH MIXER

Variable speed direct drive unit with speed range of 90 to 1800 rpm. (20 to 1 ratio), gear drive unit with 20-350 rpm, adjustable min-max speed trim. 1/4 hp., 115 volt, integral motor and control with 150% overload capacity with reset button. TENV motor. Pre-wired cord and 3-prong plug. Weight 26 lbs.


AIR BATCH MIXER

Air powered unit can be used in hazardous areas for mixing volumes to 55 gals. 1/3 hp. rating, variable speeds to 1750 rpm. Weight 30 lbs.



GEAR BATCH MIXER

Gear driven, mixes volumes up to 600 gallons. 1/4 hp. motor with sealed ball bearings. Delivers steady 350 rpm on 115 volt, 60 Hz. Integral on/off switch with 7' cord and 3-prong plug provided with 5/8" stainless steel shaft and 7.7" SuperPitch® propeller. Bung Adapter not available for Gear Batch Mixer. Weight 60 lbs.

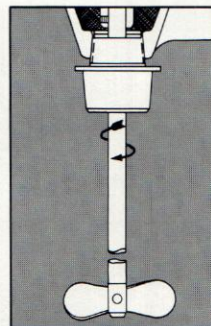

BUNG ADAPTER.

Optional accessory for mounting Batch Mixer drive to 55 gallon drum. Supplied with 5/8" x 32" long shaft and an integral 3" folding propeller assembly.