


LX-300 Shrink Labeling System

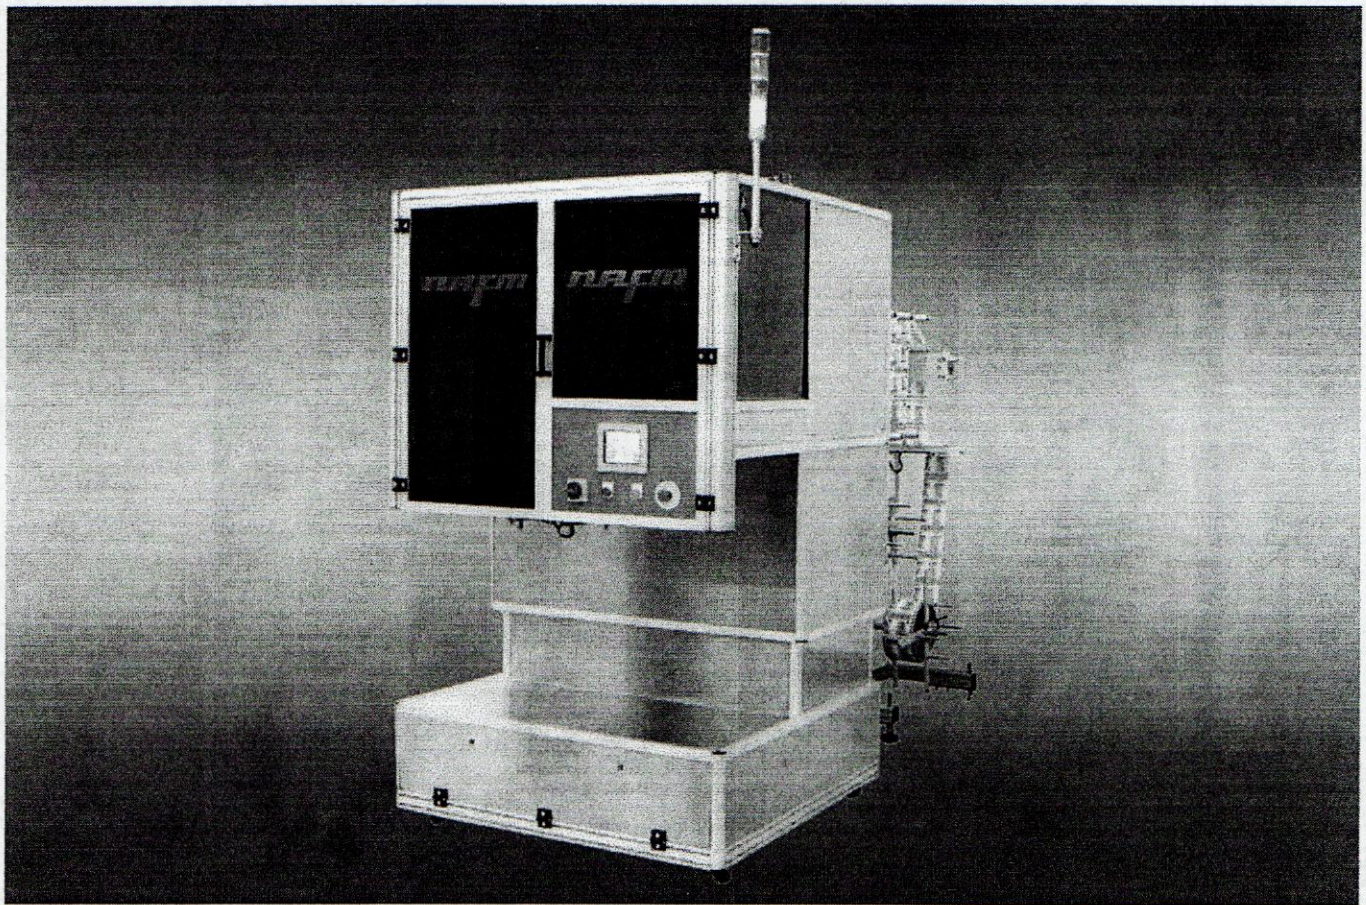

■ Main Feature

Overview:

LX-300 In-Line shrink labeling machine is built with heavy duty construction. Our LX-300 machine is equipped with a precision mandrel (bullet) that guides the label right on the passing container. A set of rotating blades assure smooth and quick cutting. LX-300 is servo driven and microprocessor controlled for faster and more accurate performance.

Flexibility:

Wide variety of container sizes, round, square and oval.

Quick and Inexpensive change-over:

The mandrel and cutter assembly is a modular design. Change-over for different sizes are easy and do not require any tools.

Control:

Microprocessor controlled and servo driven with user friendly software. Machine is equipped with a touch screen operator interface and built in diagnostics.

■ Standard Specification

Speeds: up to 500 BPM

Custom sizes and features available.

Label Height: (Cut Length) 30mm - 300mm

Utility: 220 v 3 phase 50/60 HZ

■ Optional accessories and features

Vertical Perforation

Horizontal Perforation

Special (T-Type) Perforations

Steam Shrink Tunnel

Electric Shrink Tunnel

Date coder

Inspection and Reject Device

Full Line Integration

■ **Standard lead time:** 12 weeks.


■ **Start-up and training assistance**

Nippon Automatic Fine Machinery Co.,Ltd.

Superior Packaging Machines

NAMCM

LX-300 Shrink Labeling System

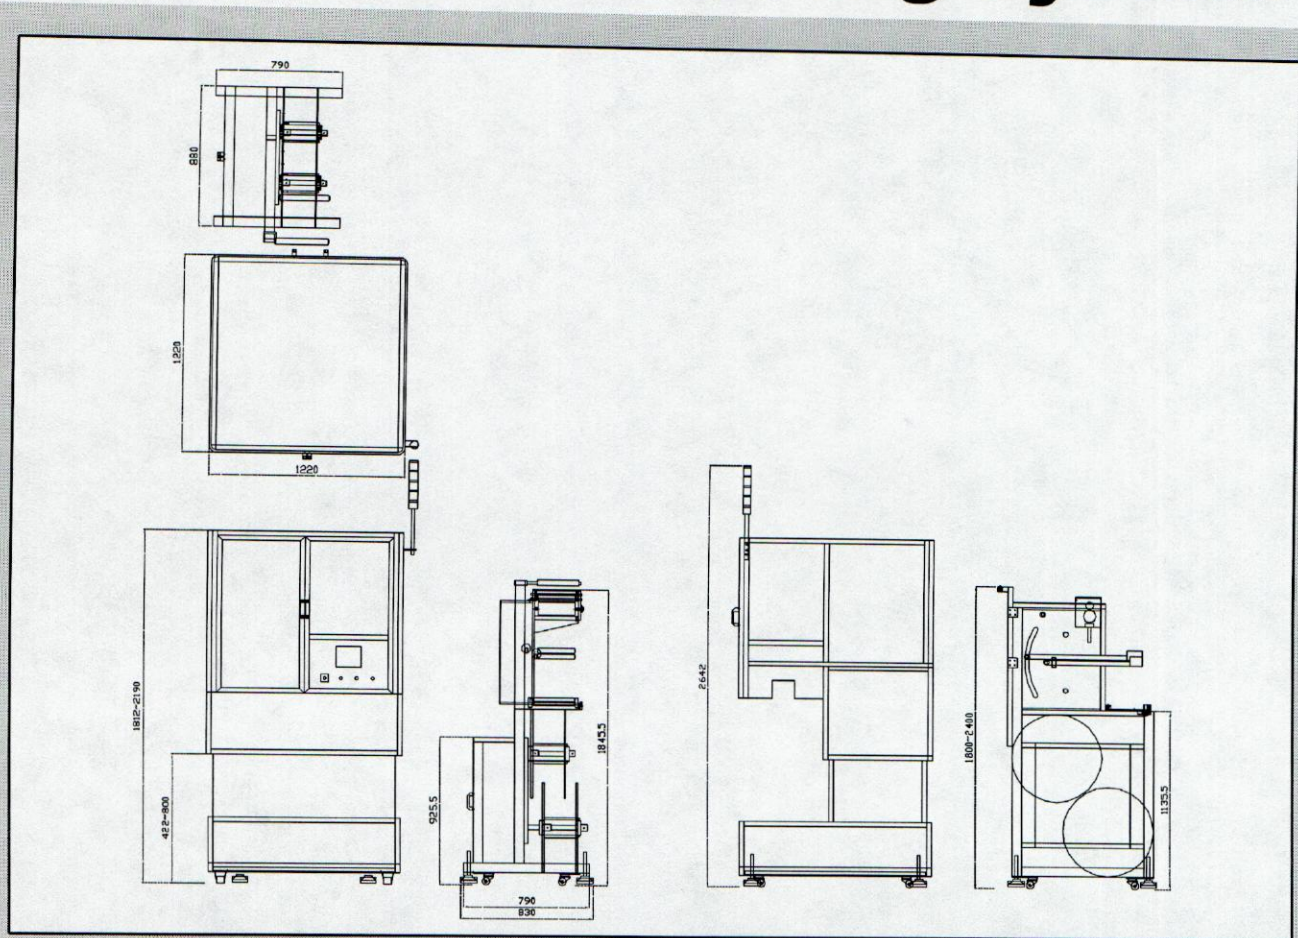

《OTHER MODELS》

MODEL	CAPACITY (BPM)	DIAMETER (mm)	FILM CUT LENGTH (mm)	NUMBER OF STATIONS	MAIN MOTOR (kw)	MACHINE DIM LxWxH(mm)
LX-500T	Normal 500	custom	30~300	2	0.75	See Drawing
LB-250	Normal 250	custom	30~300	1	0.50	See Drawing
AW-300	Normal 250	40~90Φ x 310H	40~MAX220	10	0.75	1500Lx1830Wx2400H
AW-400	Normal 400	40~90Φ x 310H	40~MAX220	12	0.75	1500Lx1830Wx2553H
AW-400T	Normal 600	40~90Φ x 310H	40~MAX220	10x2	0.75	2800Lx1850Wx2400H
SL-720	MAX 600	30~75Φ x 100~310H	25~220	10~24	3.7	1650Lx2200Wx2400H
SL-1000	MAX 800	30~75Φ x 100~310H	45~190	20~30	5.5	2000Lx2000Wx3200H
SL-1200	Normal 900	30~75Φ x 100~310H	45~210	24~36	7.5	3500Lx2500Wx3200H
SL-1600	Normal 1200	30~75Φ x 100~250H	45~190	48	11	4000Lx2900Wx3200H
SLX-1200	Normal 900	30~105Φ x 120~310H	45~190	20~36	7.5	4250Lx2400Wx3200H
SLX-1600	Normal 1200	50~75Φ x 120~210H	45~190	24~48	11	4800Lx3200Wx3200H
SSL-660SR	MAX 600	60~75Φ x 120~210H	40~210	30	5.5	4150Lx2700Wx3200H
SSL-640SR	MAX 400	60~115Φ x 120~310H	40~210	20~24	5.5	4150Lx2700Wx3200H

- The designs and specifications are subject to change without notice.
- For more information on this series and all other models contact NAFM sales office.

NAFM Engineering Service

5753-G Santa Ana Canyon Rd # 306 Anaheim,
CA 92807 USA
PHONE:;714-974-9006
FAX:;714-974-5141
www.nafm.com