

SANIFILL Rotary Powder/Granular Filler

Meets the Highest Sanitation Standards Worldwide

All Stainless Steel Construction meets stringent dairy sanitation standards.

Fill Accuracy to $\pm 1/2\%$ preserves profits on high cost-per-pound products.

Unitized Change Parts for complete "No Tools" container changeovers. Changeover and clean-up is possible in 1/2 hour or less.

"Bottom-up" Filling provides efficient dust-free filling.

Optional Automatic Fill Control is available using Servo/Checkweigher systems.

Near Zero Maintenance due to rugged construction and simplicity of design.

Standard electronic drive features slow start/stop & variable speed control.


Vibration systems tailored to your product with bottom vibration, side vibration, or step (high impact) vibration systems.

Centralized Lubrication System

No Moving Parts in the Filler Head results in gentle product handling. This minimizes product breakdown and/or separation. This unique Nalbach design also reduces machine wear caused by abrasive products.

First-In, First-Out Product Usage

"No-Container, No-Fill" is accomplished by stopping the machine when no containers are present at the infeed of the machine. This simple system eliminates a complicated and dirty product shut-off mechanism on each filling head. (A "powder filler" cannot be allowed to operate without containers to fill as this action would result in degradation of the product.)

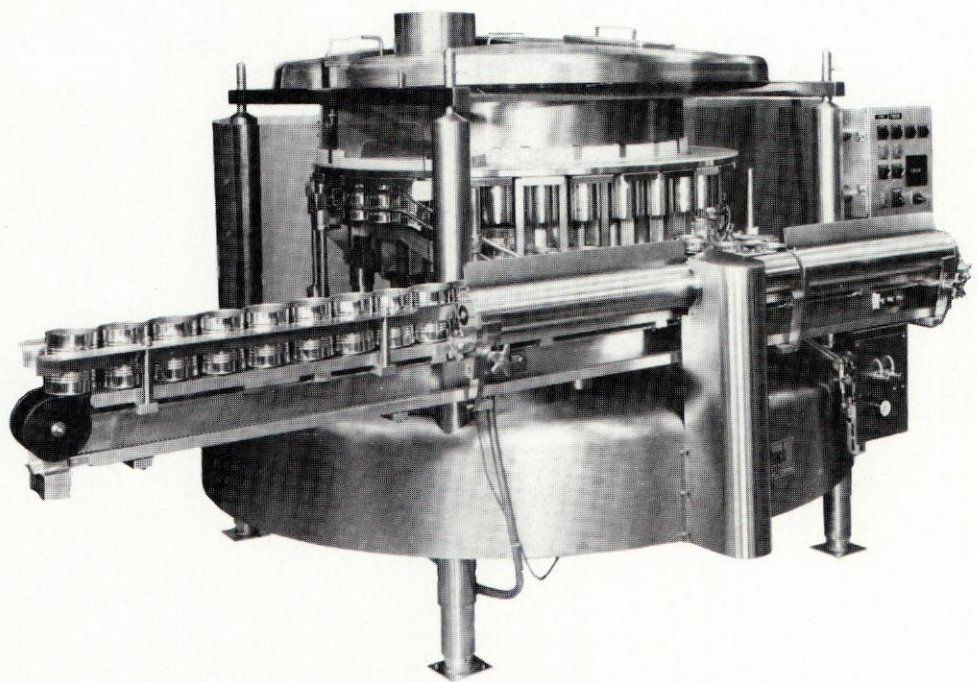

SANIFILL provides powder/granular filling speeds up to 500 CPM for rigid glass, tin plate, plastic or composite containers. It meets the rigid sanitation standards of the dairy industry while maintaining Nalbach's unique bottom-up filling technique.

John R. Nalbach Engineering Co., Inc.

For Export: **Nalbach International, Inc.**

6139 WEST OGDEN AVENUE, CHICAGO, ILLINOIS 60650 • PHONE: 312/652-8900 • FAX: 312/652-8920 • TELEX: 283574 NALBACH CRO

nalbach

