

SPECIFICATIONS: DJ-2200 DISPENSEJET® VALVE

DJ-2200 DISPENSEJET® JETTING TECHNOLOGY FOR PRECISE FLUX APPLICATION

Flux application using the DispenseJet® DJ-2200 is a superior alternative to dipping and screen printing for flip chip assembly operations. Jetting offers both speed and accuracy, and eliminates contamination and material waste associated with conventional methods. Jetting allows 100% coverage with a minimal amount of flux (typically 5 µm), producing less residue after reflow. Less residue results in better package reliability.

Jetting replaces the high-maintenance dipping that is often performed with pick and place equipment. By separating the fluxing and chip placement operations, significant throughput can be achieved in flip chip assembly operations. The DispenseJet can also be used for coating with other fluid materials, like photo resist for non-round substrates.


Jetting lets you accommodate changes in part styles or substrates without costly downtime and tooling changes. Dispensing parameters can be changed quickly and easily using programmed patterns stored in a personal computer.

In the jetting process, the DispenseJet valve moves in an X, Y plane to dispense a variety of pre-programmed patterns, which create a uniform film of flux. There is no movement required in the Z-axis during or between the dispense cycles. Time elapsed between cycles is minimized, increasing your throughput and productivity.

The DispenseJet valve is capable of dispensing dots and coaxial air-assisted lines and dots. When



equipped with the coaxial air option, jetted flux is followed by a pulse of air, which aids flux flow and helps overcome the surface tension present on some substrates and parts.

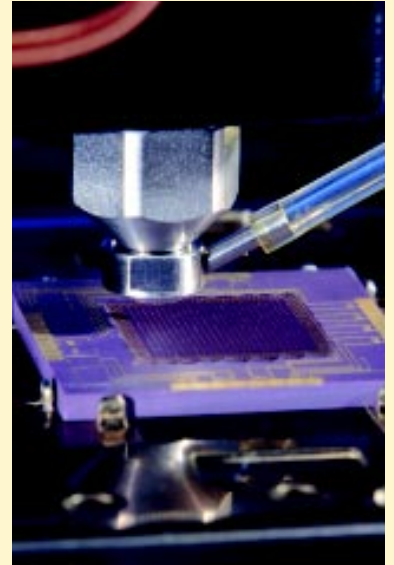

FEATURES

- Changes in part styles can be accommodated without downtime and tooling changes
- Reduces flux waste and improves material utilization with minimal maintenance
- Separates flux and chip placement operations for higher throughput
- Improves quality of flip chip soldering with lower residues
- Provides micro-dispensing of thin layers of fluid as low as 5 µm (0.2 mils) thick for thin flux materials

Packaging - Processing

Bid on Equipment


1-847-683-7720

www.bid-on-equipment.com

Asymtek®
A NORDSON COMPANY

HOW IT WORKS

The DJ-2200 DispenseJet® valve uses a patented high-precision mechanism to control exact volumes of flux dispensed directly from the nozzle onto the substrate. During each dispensing cycle, solenoid-driven air pressure retracts an internal plunger and an exact amount of material is fed into the fluid chamber under controlled pressure. Then, the spring-driven plunger returns to its seat and an impact force that ejects the fluid onto the substrate. Dot consistency is aided by a built-in heater that controls fluid temperature to facilitate the jetting process. The syringe/reservoir is completely sealed, allowing constant, full pressure at all times. This allows high-speed, non-contact jetting of low-viscosity materials like rosin and no-clean fluxes with sharp, clean cut-off.

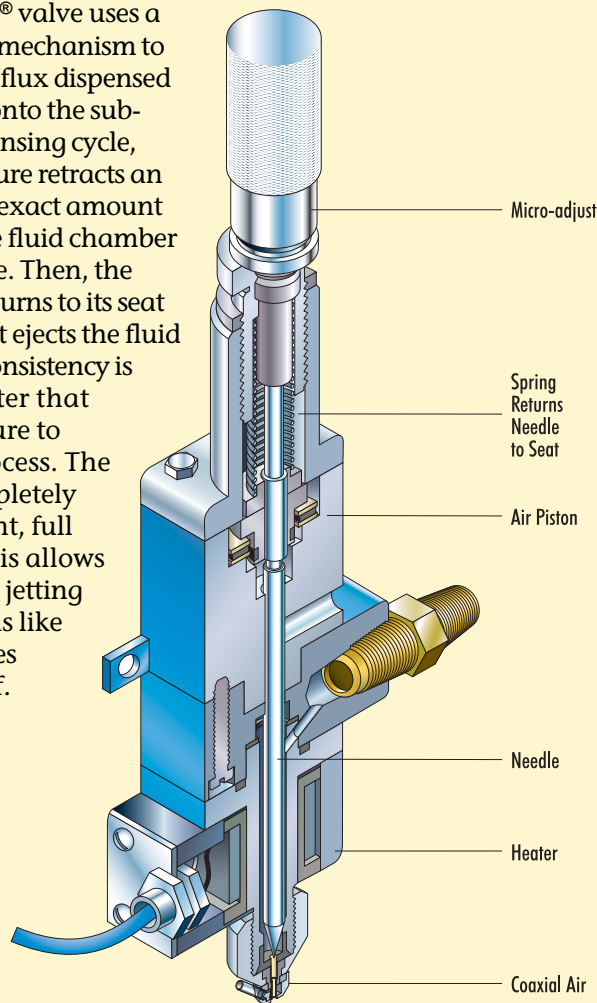

DJ-2200 SPECIFICATIONS:

VALVE:

Operating Voltage:	24VDC
Weight:	380 g (without syringe)
Syringe:	5, 10 or 30 cc
Reservoir:	6 or 20 oz.

ELECTRICAL:

Solenoid:	24V DC, 12.7 watts
Heater:	8.5 watts

PNEUMATIC:

Air Solenoid Pressure:	6.9 Bar (100 psi)
------------------------	-------------------

FLUID PRESSURE:

0-2 kg/cm ² (0-28 psi)

NOZZLE:

Orifice Diameter:	0.2 to 1.2 mm (0.008 to 0.05 in.)
-------------------	--------------------------------------

Standard jet nozzles dispense lines typically 3 mm (0.125 inch) wide. Wide nozzles are available for lines 10mm (0.4 inch) wide.

Please contact these locations for the name of your local representative:

HEADQUARTERS

2762 Loker Avenue West
Carlsbad, CA 92008-6603 USA
U.S. Toll Free: 1-800-ASYMTEK
Tel: (760) 431-1919
Fax: (760) 431-2678
Email: info@asymtek.com

INTERNATIONAL SALES

Europe: +31 (0) 43-352-4466
Japan: +81 (0) 3-5762-2801
Korea: + 82-31-766-8321
S.E. Asia +65 (0) 7782511
Taiwan: +886-2-82001268
China: +(86-21) 5854 2345

www.asymtek.com

Packaging - Processing

Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

DispenseJet® and Asymtek® are registered trademarks of Asymtek.

All specifications are believed to be a true and accurate representation of system capabilities and are subject to change without notice. Contact Asymtek for your specific application requirements.

©2004 Asymtek Published 6/04 Asymtek is ISO 9001:2000 Certified
Asymtek is the recipient of Intel Corporation's 2003 SCQI Award.

ASL-99-2062 Rev C

Asymtek®
A NORDSON COMPANY