

# SPECIFICATIONS: FILM COATING

## SELECT COAT® FILM COATER PRECISE NON-ATOMIZED CONFORMAL COATING APPLICATION

The Nordson Select Coat non-atomized film coater, provides automated, selective application of conformal coating materials with viscosities of less than 100 centipoise.

Achievable coating thicknesses range from 0.5 to 8 mils for solvent based materials and 4 to 8 mils for 100-percent solids materials.

With transfer efficiency in excess of 99 percent, the film coater lets manufacturers improve material utilization by 30 to 50 percent. Because the conformal coating material is not atomized, overspray, masking, and rework associated with conventional conformal coating processes is minimized.

Using patented dispensing technology; the film coater applies conformal coating material in a controlled, uniform film rather than an atomized spray. Material is directed under low pressure through the dispenser and a patented dispensing nozzle. Material is applied to the circuit board prior to the point of atomization.

A variety of nozzles are available to dispense film pattern widths from 0.25 to 0.75 inch (6.35 to 19.05 mm). Each delivers excellent edge definition with a tolerance of  $\pm .030$  inches (.762 mm).



Five-axis coating head

Five-axis coating head capability allows coating of tops, sides and underneath components.

### FEATURES

- **Better than 99 percent transfer efficiency, results in improved material utilization, less waste and reduced costs.**
- **Virtually eliminates masking through precise, selective material application.**
- **Coats even complex circuit boards in seconds.**
- **Reduces VOC emissions through use of a non-atomized application process and an enclosed, ventilated system.**
- **Easily integrates with Nordson Select Coat and Century® conformal coating systems.**



Packaging - Processing


**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

# NON-ATOMIZED FILM COATER SPECIFICATIONS

Film pattern width	0.25 to 0.75 in. 6.35 to 19.05 mm
Masking required	No
Material viscosity	Under 100 cps
Application thickness (mils)	0.50 to 8 mils
Edge tolerance	± .030 in. ± .762 mm
Transfer efficiency	Over 99%
Coating velocity	5-20 ips 13-51 cms
Typical Fluid Dispense Pressure:	15-60 psi 103-413 kPa
Pattern Width:	0.25 to 0.75 in. (6.35 to 19.05 mm)

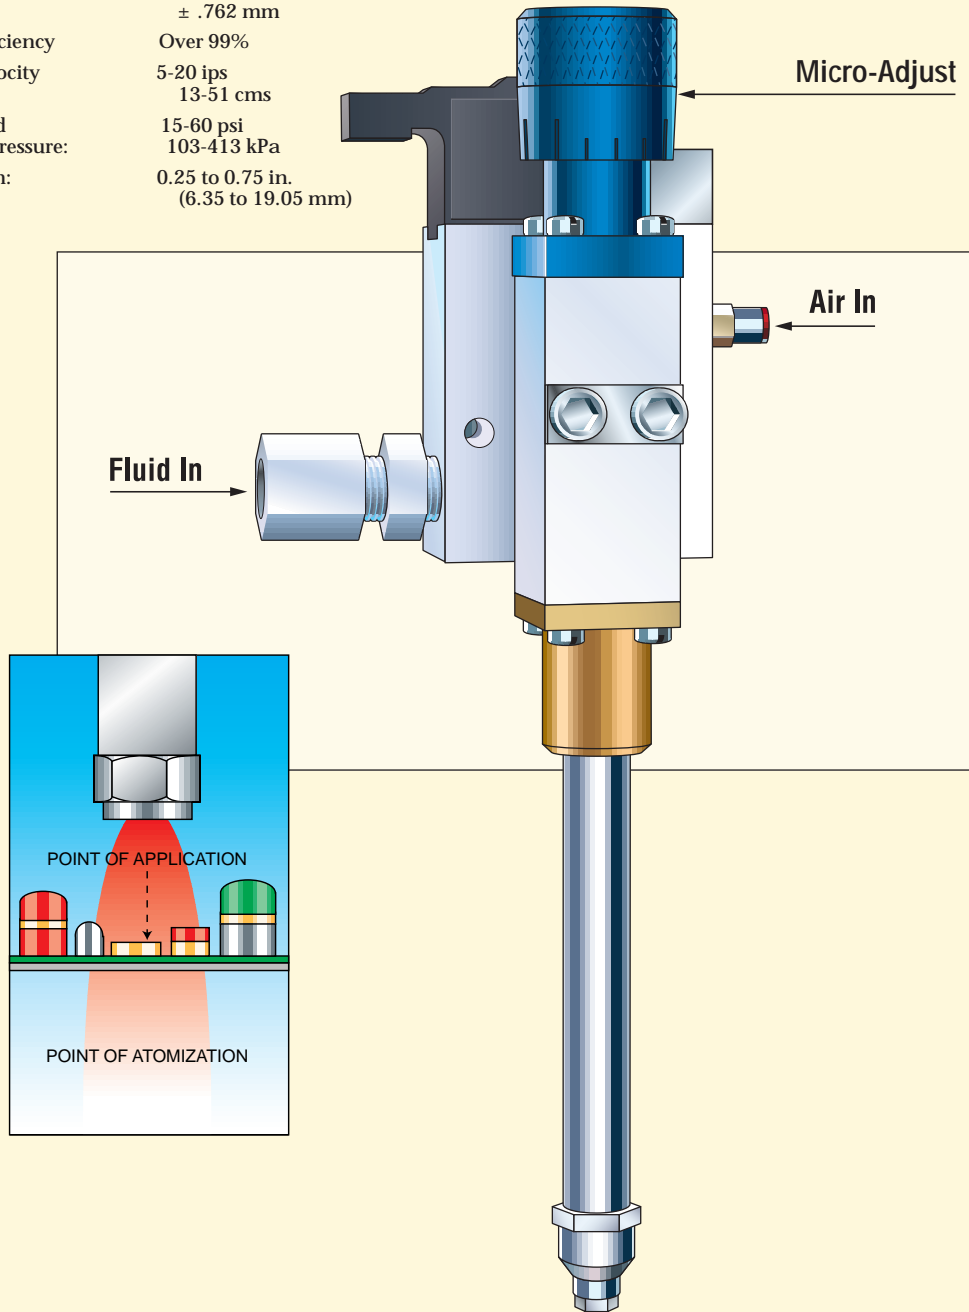

Nordson Corporation is pleased to offer world-wide sales and service support through an integrated network of regional offices. Please contact these locations for the name of your local representative.

**NORDSON ELECTRONICS SYSTEMS**  
 300 Nordson Drive  
 Amherst, Ohio 44001 USA  
 Toll-Free: (877) 374-6673  
 Tel: (440) 985-4098  
 Fax: (440) 985-1122

**INTERNATIONAL SALES**  
 France  
 Tel: + 33 (0) 164-121400  
 Fax: + 33 (0) 164-121402

Germany  
 Tel: + 49 (0) 211-92050  
 Fax: + 49 (0) 211-254658

Netherlands  
 Tel: + 31 (0) 43 352-4466  
 Fax: + 31 (0) 43 363-7722

United Kingdom  
 Tel: + 44 (0) 161-4954200  
 Fax: + 44 (0) 161-4286716

Japan  
 Tel: (81) 3-5762-2700  
 Fax: (81) 3-5762-2701

Singapore  
 Tel: + 65 (0) 7782511  
 Fax: + 65 (0) 7783151

Taiwan  
 Tel: + 886-2-82001268  
 Fax: + 886-2-8201269

Web Site: [www.nordson.com/electronics](http://www.nordson.com/electronics)  
 Email: [electronics@nordson.com](mailto:electronics@nordson.com)

*Select Coat® and Century are registered trademarks of Nordson Corporation. Nordson reserves the right to make design changes to products to improve their function. These changes may occur between printings*

©1999 Nordson Corporation  
 All Rights Reserved  
 5/99

