

# Ultra FoamMix<sup>®</sup> Adhesive Tank



*Provides high-volume dispensing of foamed hot melt materials for a variety of bonding, sealing, gluing and gasketing applications.*



The Nordson<sup>®</sup> Ultra FoamMix series of applicators are the result of continuous improvement on a proven model of success. These enhanced applicators provide advanced controls, improved serviceability and pinpoint temperature control in a system that can melt and deliver up to 300 ltrs/hour of low to medium viscosity foamed material.

## **Advanced Application Technology**

The Nordson Ultra FoamMix process dramatically improves the performance of most hot melt adhesives by mixing them with inert gas, creating a homogeneous solution. As the material is dispensed the gas expands to create a closed-cell foam. The foamed material is applied like the more conventional approaches, but provides the following benefits:

- **Reduced adhesive consumption** of up to 50 percent.
- **Dramatically reduced energy consumption**, as the amount of adhesive which needs to be molten is reduced.

- **Increased open time** produces longer, more useful beads and provides greater flexibility.
- **Faster set time** for increased line speeds and production rates. Labor is reduced and less warehouse space is required for inventory.
- **Volumetric increase** for greater gap filling capabilities.
- **Improved wetting** increases the ability to bond impervious surfaces and enhances application versatility.
- **Lower heat density** reduces heat damage and improves operator safety.
- **Reduced sagging or running** for uniform adhesive thickness.
- **Increased penetration** creates stronger bonds and results in fewer rejects.

# Ultra FoamMix® Adhesive Tank

## Specifications



Electrical Requirement	3 x 400 VAC + N + PE
Hose Connector Diameter	for 8 mm, 13 mm or 16 mm hoses
Recommended Fusing and Wire Size	100 A/phase, 5 x 10 mm <sup>2</sup>

Ultra FoamMix Tank Systems	PH 100 UFM	PH 200 UFM	PH 400 UFM
Maximum Throughput	100 liters/hour	200 liters/hour	400 liters/hour
Tank Size	100 liter	200 liter	400 liter
Weight	1200 kg (2646 lbs)	1400 kg (3086 lbs)	1600 kg (3527 lbs)
Power Consumption	55 KW max., 75 A/phase max.	60 KW max., 80 A/phase max.	64 KW max., 85 A/phase, max.

PH 100 UFM = 1 foaming station possible  
 PH 200 UFM = 2 foaming stations possible  
 PH 400 UFM = up to 3 foaming stations possible

## Dimensions

All dimensions in millimeters unless noted otherwise.

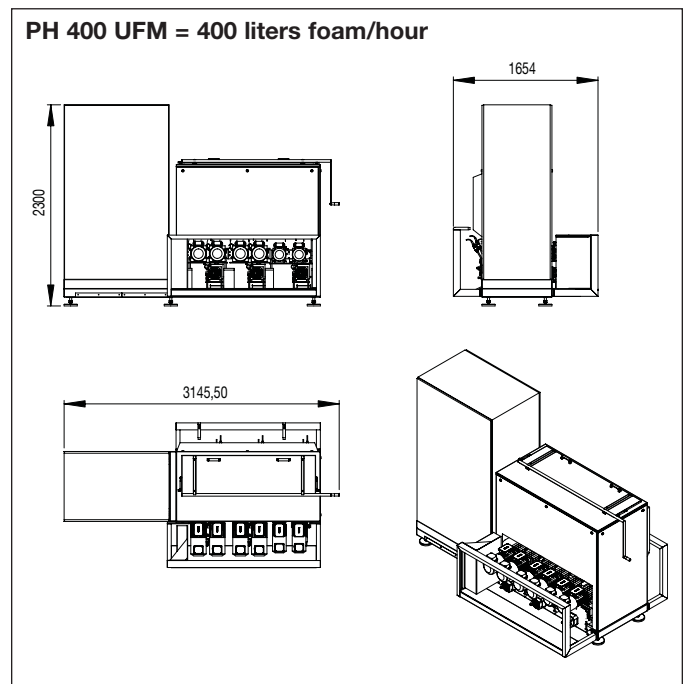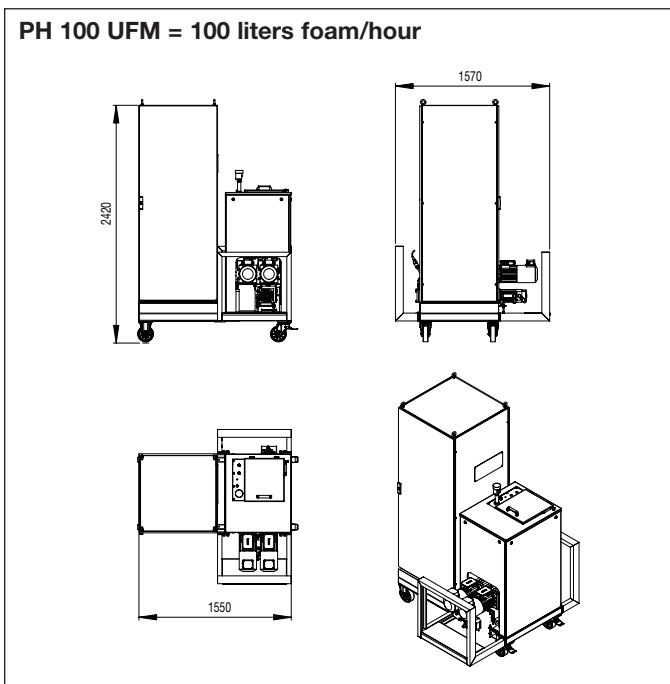

For more information, talk with your Nordson representative or contact your Nordson regional office.

### United States

Duluth, Georgia  
 Telephone: (800) 683-2314  
 Facsimile: (866) 667-3329

### Canada

Markham, Ontario  
 Telephone: (800) 463-3200  
 Facsimile: (905) 475-8821

### Europe

Lüneburg, Germany  
 Telephone: (49) 4131-894-0  
 Facsimile: (49) 4131-894-149

### Japan

Tokyo, Japan  
 Telephone: (81) 3-5762-2700  
 Facsimile: (81) 3-5762-2701

### Asia/Australia/ Latin America

Amherst, Ohio  
 Telephone: (440) 985-4797  
 Facsimile: (440) 985-1096

[www.nordson.com](http://www.nordson.com)



When you expect more.®

Nordson Corporation • 11475 Lakefield Drive • Duluth, Georgia 30097-1511

© 2006 Nordson Corporation  
 All Rights Reserved.  
 Nordson reserves the right  
 to make design changes between printings.

**Packaging - Processing**  
**Bid on Equipment**  
 1-847-683-7720  
[www.bid-on-equipment.com](http://www.bid-on-equipment.com)