




Model 1508 NLG

## Self-Actuating Tray Lidder

### Key Features:

- Medium capacity heat-seal tray lidder designed for use with heat-seal coated, printed or unprinted, plastic film lids.
- For use with flat-flanged paperboard or plastic trays.
- Complete heat-seal control of time, temperature, and pressure.
- Unique air actuator providing high seal force and floating hot platen.
- Auto-Seal with Auto-Eject.
- Stainless steel and anodized aluminum construction.
- Integrated dual lidding dispenser.
- Countertop size for limited space applications.
- Interchangeable tray carriers for trays up to 9" x 10.75" x 3.5" deep.
- Additional tray sizes may be compatible; please contact your Account Manager.

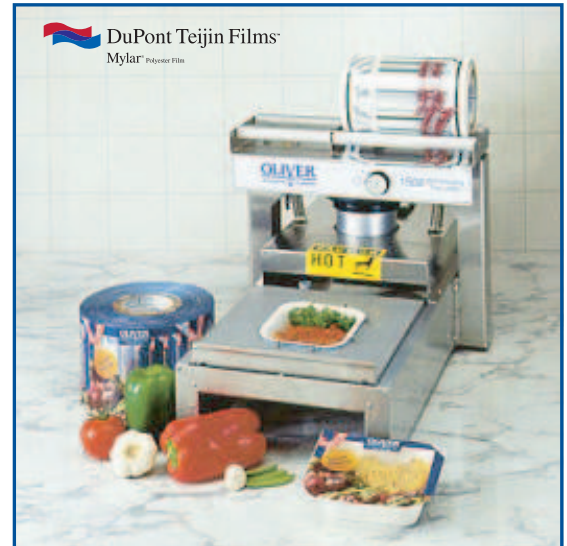

### Benefits:

- Improves merchandising, creates your own "brand", sells more product.
- Lowers packaging costs (film lidding vs snap-cover domes).
- Improves package performance, leak-resistant, microwavable/ovenable.
- Flexible, quick five second tray carrier change-over to various sizes.
- Simple operation, push tray carrier in to activate the sealing process, upon completion the tray carrier automatically ejects to the starting position. Allows sustained seal rate of eight packages per minute.
- Easy cleaning and high durability for continued use in food preparation environment.
- Assures consistent seal integrity.



U.S. Patent # 5,791,120

Mylar® is a registered trademark of Dupont Teijin Films for its polyester film. Only DuPont Teijin Films makes Mylar®.

**Manufactured in the U.S.A.**



Oliver Packaging & Equipment Company  
511 Sixth Street NW • Grand Rapids, MI 49504  
(800) 253-3893 • (616) 356-2950 • [www.oliverquality.com](http://www.oliverquality.com)

**Packaging - Processing**  
**Bid on Equipment**  
**1-847-854-8577**  
[www.bid-on-equipment.com](http://www.bid-on-equipment.com)



## Self-Actuating Tray Lidder

### SPECIFICATIONS:

#### Tray Capacities:

9" x 10.75" maximum top-outside dimension tray.

3.5" maximum tray depth.

Custom tray carrier tooling available to match your trays.

#### Temperature Range:

50°F (10°C) to 300°F (149°C)

#### Dimensions:

15.50" (394mm) overall width (front)

25.63" (651mm) overall depth

13.88" (352mm) overall height

#### Weight:

55 pounds (22.7 Kg)

#### Electrics:

115 VAC, 6.6 AMPS, single phase, 50/60 Hz

230 VAC, 3.3 AMPS, single phase, 50/60 Hz

#### Air:

90 PSI at 0.1 CFM minimum, 140 PSI maximum

40 PSI minimum

#### Agency Approvals:

ETL, ETLIC, NSF, CE in process.

#### Dual Lidding Dispenser:

For roll lidding, pre-die-cut and connected by tear-away perforation.

#### Roll capacities:

9.5" maximum outside-diameter roll

9" maximum width roll

(lidding available from Oliver Packaging & Equipment Company).


### OPTIONAL ACCESSORIES:

#### Air Compressor:

Compact, quiet, 115 or 220 VAC, 3.7 AMPS, 50/60 Hz, 125 PSI, 0.9 CFM @ 100 PSI, oil-less air compressor sized to work with the 1508 Self-Actuated Tray Lidder in places where "shop air" is unavailable.

#### Workstation Stand:

36" stainless steel workstation stand with casters and side tables.

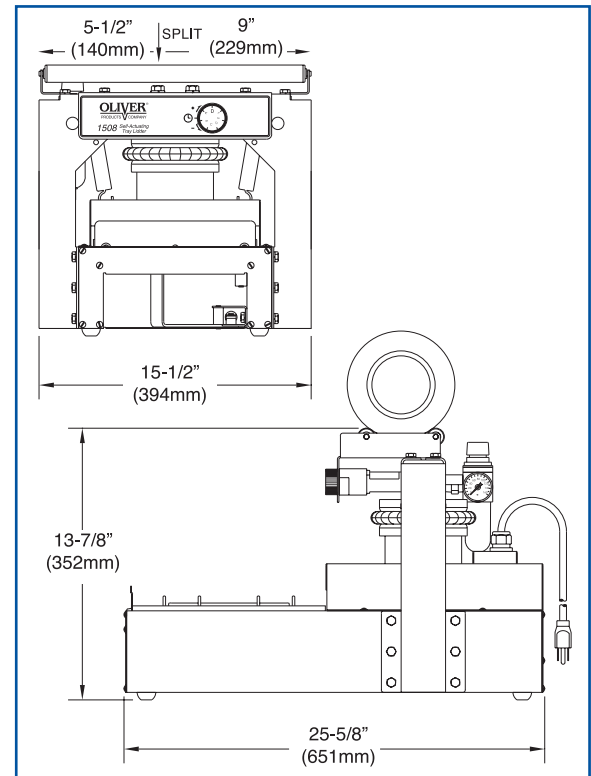

The information contained herein is correct to the best of our knowledge. The recommendations or suggestions are made without guarantee or representation as to results. Freedom from any patent owned by Oliver Packaging and Equipment or other is not to be inferred.

Above specifications subject to change without notice

**Manufactured in the U.S.A.**



Oliver Packaging & Equipment Company  
511 Sixth Street NW • Grand Rapids, MI 49504  
(800) 253-3893 • (616) 356-2950 • www.oliverquality.com

**Packaging - Processing**  
**Bid on Equipment**  
**1-847-854-8577**  
**www.bid-on-equipment.com**