

# Model CS30-SE Right Angle Side & End Sealer



## Side and end seal different size pork cases at speeds up to 30 CPM.

Pearson's CS30-SE Right Angle Side & End Sealer is designed to close and seal two different pork cases of different fixed lengths and depths on a random basis at speeds up to 30 cases per minute.

As the case enters the inline section of the machine, the top panel is closed and its extended tab is glued and sealed to the side of the case. The case continues through the machine to the right angle section where the end flaps are closed and sealed.


The CS30-SE comes standard with an Allen-Bradley® Programmable Logic Controller, three Nordson® Hot Melt Adhesive systems, UL® Listed Control Panel, and an inventory control photoeye at the discharge.

Like all Pearson products, the CS30-SE is backed by Pearson's experienced factory professionals as well as one of the largest teams of PMMI certified regional service technicians in the industry, available 24-hours a day, 7-days a week - worldwide.


**Packaging - Processing**  
**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

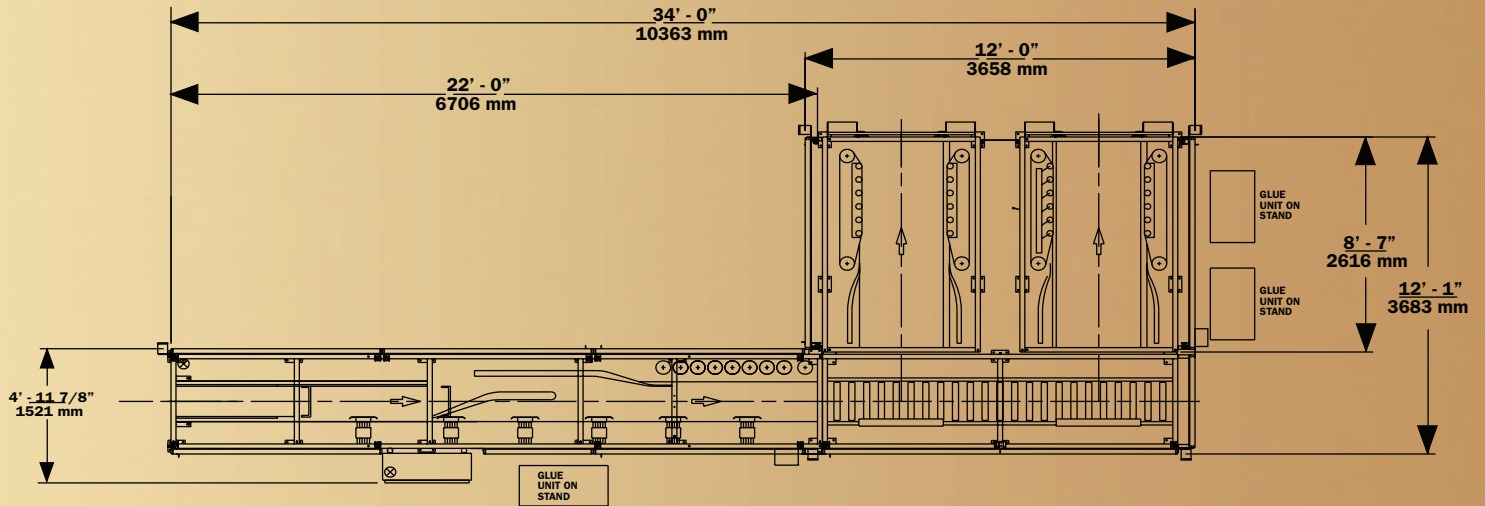

PLAN VIEW

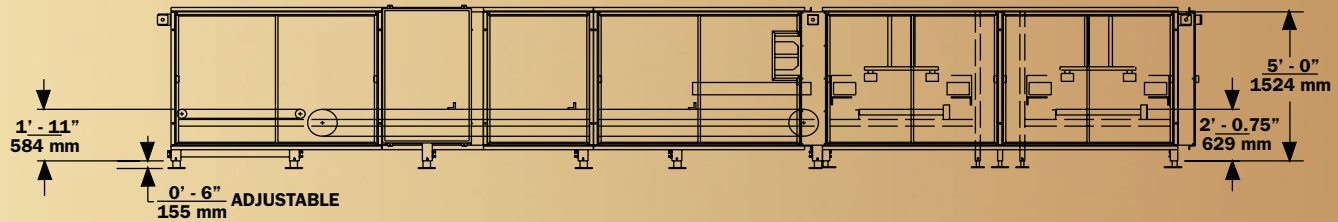

ELEVATION VIEW

### UTILITY REQUIREMENTS CS30-SE

**Electrical:**

230/460V, 3-phase,  
60 Hz Std., 18.4 kVA

**Pneumatic:**

0.950 SCF/Cycle @ 80 PSI  
(0.027 m<sup>3</sup>/cycle @ 551.2 KPa)

**Shipping Weight:**

15,000 lbs (6750 kg)

### ERECTED CASE SIZE RANGES

LENGTH*	WIDTH	HEIGHT
17" – 32"	11" – 13.5"	6" – 11"
432 – 813 mm	279 – 343 mm	152 – 279 mm

### LONG PANEL TAB WIDTH RANGE

3" - Equal to Case Depth
76mm - Equal to Case Depth
*Maximum 3" difference per discharge. Short panel tab width to be full case depth.

