


SERIES 2000

# Automatic Case Packer

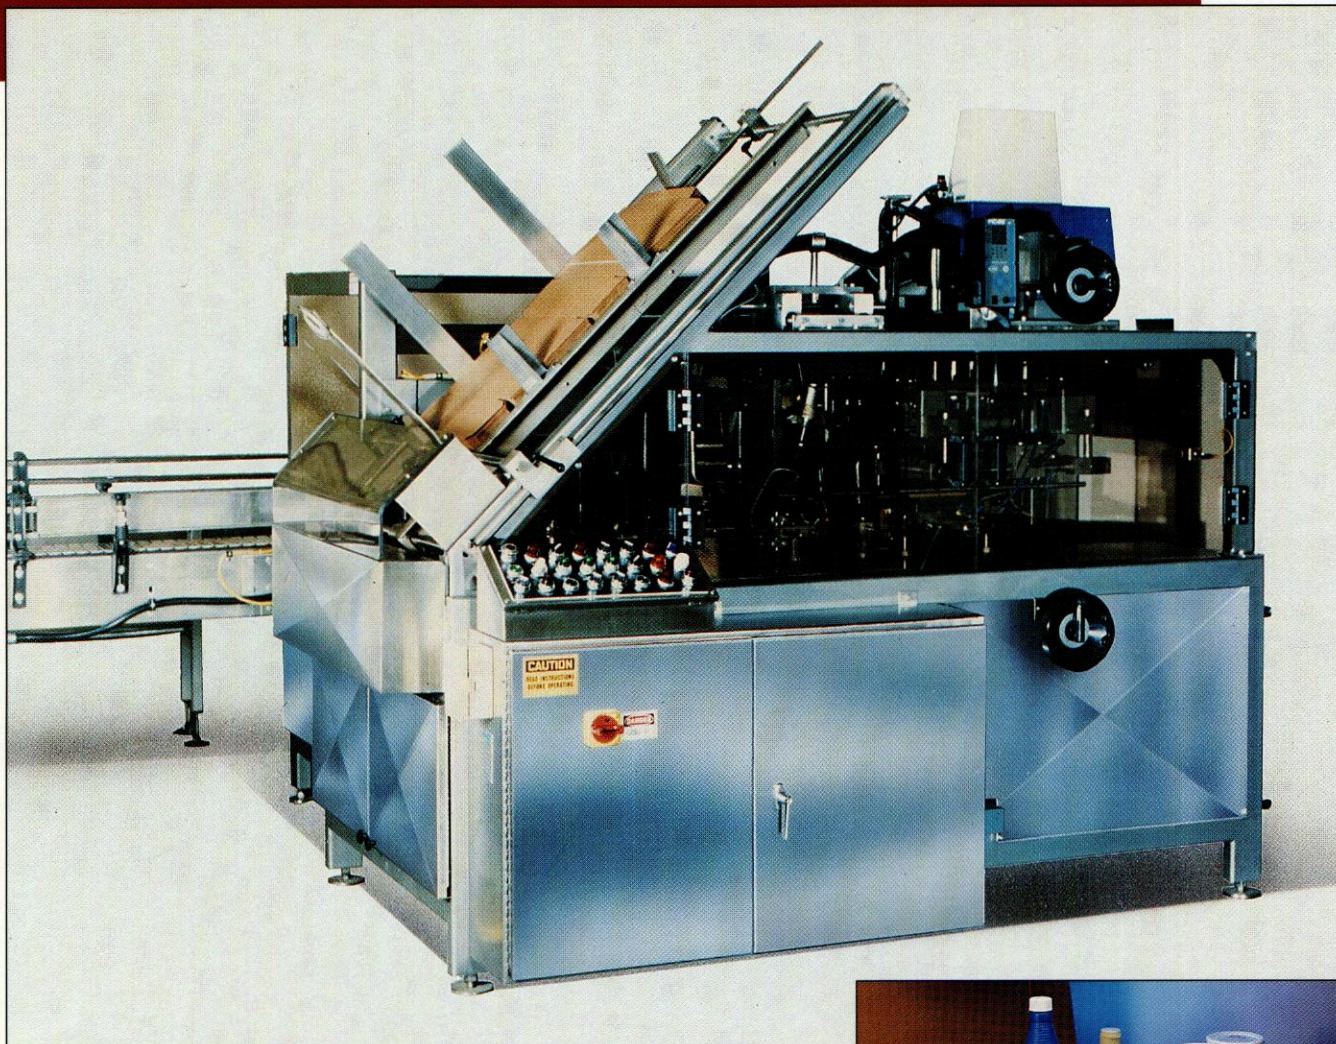

### Features:

- Compact, Fully-Automatic, 2-Station Design with Updated Technology Throughout.
- PLC-Controlled with Data Highway Capabilities.
- Heavy Duty Construction and Durable Components to Handle Continuous, Multi-Shift Operation.
- Adaptable to Handle Trays, Preglued (RSC) End Load Cases and Wraparound Cases.
- Various Infeed Systems for Installation Versatility.
- Quick, Easy Changeovers with Minimal Change Parts Required on the Base Machine.



### Barry-Wehmiller Packaging Systems

5320 140th Avenue North  
Clearwater, Florida 34620  
813/535-4100 fax 813/539-8944

**Barry-Wehmiller**

**pneumatic  
SCALE**

**Jetstream® Systems**

## SERIES 2000 Automatic Case Packer

The Series 2000 Case Packer is a compact, flexible, cost-efficient, fully automatic packer with a speed range of up to 12 cases or trays per minute.

The Series 2000 can produce three types of packaging: trays, preglued (RSC) end-load cases and wraparound cases. All operations are performed in 2 stations on a single level.

Station 1 consists of the carton blank feed and product infeed. Blanks are separated with vacuum cups and placed in between the carrier chain pusher bars to preform the case for incoming product. The product is loaded and indexed to station 2.

Station 2 is the folding and compression operation where folding rails compress the major and minor flaps. Sealing is done by strip application of adhesive by a hot melt glue system.

### Additional Features:

- ALL STAINLESS STEEL FRAME CONSTRUCTION.
- ALL MECHANICAL DRIVE AND INTEGRATED INFEED SYSTEM.
- DEMAND BASIS OPERATION ALLOWS MACHINES TO HANDLE SURGES IN THE PRODUCTION LINE; NO MANUAL ADJUSTMENTS ARE REQUIRED.
- PLC CONTROL FOR ALL TIMING FUNCTIONS OF THE MACHINE FOR TROUBLEFREE PERFORMANCE.
- FULLY INTERLOCKED POLYCARBONATE AND STAINLESS STEEL GUARDING IS STANDARD.


### Options:

- LINE FAULT MONITORING AND DIAGNOSTIC DISPLAYS.
- SERVO CONTROLLED MACHINE ADJUSTMENTS.
- INSERT DISPENSING EQUIPMENT.

### Available Models:

- MODEL 2000-T: TRAYS
- MODEL 2000-C: PREGLUED (RSC) CASES
- MODEL 2000-W: WRAPAROUND CASES

### Specifications:
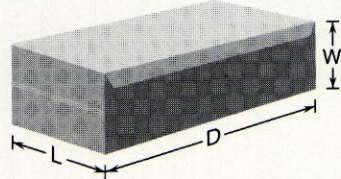
<b>PACK DIMENSIONS</b>	Length = 4" to 17" Depth = 9 1/2" * (7") to 24" Width = 4" *(2 13/16") to 12" *(15") <i>*These dimensions indicate special requirements.</i>	
<b>MACHINE DIMENSIONS</b> (excl. infeed frame)	Length = 7'6" x Width = 4'0" x Height = 7'7" Weight = Approximately 2000 lbs.	
<b>MACHINE SPEED</b>	Up to 12 cases per minute.	
<b>ELECTRICAL REQUIREMENTS*</b>	60Hz, 3-Phase, 208, 240 or 480 VAC single voltage supplied. Other electrical requirements available upon request.	
<b>AIR REQUIREMENTS*</b>	80 p.s.i., 1 SCF/cycle	

\*vary with application

**Barry-Wehmiller**

### Barry-Wehmiller Packaging Systems

5320 140th Avenue North  
 Clearwater, Florida 34620  
 813/535-4100 fax 813/539-8944

**pneumatic  
 scale**

**Jetstream® Systems**