

PAK-CONTAINER

Portable Self-Contained Compactor (PSC)

Easy-to-Operate Latches with quick release for easy container service

Designed for: Anywhere Space is limited
Restaurants
Nursing Homes
Fast Food Locations
Shopping Plazas
Supermarkets
Hospitals
Schools

Plastic, Steel, or Chute Feed Design

Heavy Duty Structural Steel Design stands up to the constant pounding of being emptied

Feed Opening is 46" x 22" to handle large bags or boxes

Hydraulic Quick-Disconnects allow easy disposal service



Front Load or Rear Load Can allows haulers to pick up on route

The most economical Self-Contained Front Load Container with remote power unit, designed for wet or dry waste and easy pickup. Designed for those generating a minimum of 20 cubic yards of refuse a week, the Pak-Container is liquid tight with continuously welded seams that eliminate leaking to maintain a clean, friendly environment.

PSC



www.PTRCO.com



Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com

PTR Baler & Compactor Company


PAK-CONTAINER

Portable Self-Contained Compactor (PSC)

PSC Dimensions

Totally

Listed

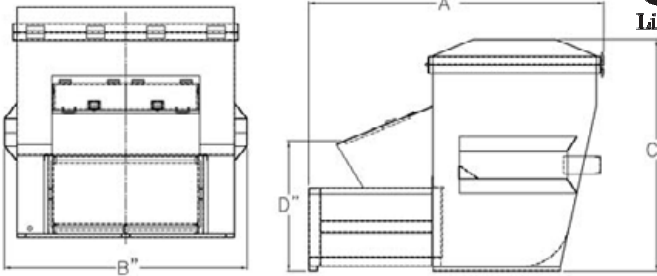

MODELS	A	B	C	D	WEIGHT
PSC-4	85"	81 3/4"	65 1/4"	43 1/4"	2700 lbs
PSC-6	98 1/4"	81 3/4"	77 1/4"	43 1/4"	2900 lbs
PSC-6RL	148"	78"	84 1/4"	43 1/4"	3400 lbs



The PSC is compatible with a majority of front and rear load vehicles. The low profile makes it easier and safer for drivers to see over the unit. It features a remote power unit and a Tri-Voltage motor with quick disconnect which allows for ease of service. These features make the PCS one of the most economical and simplest to use self-contained front or rear loading containers on the market.



ISSA
The Experts
on Cleaning and Maintenance

 **WASTEC**
MEMBER



PTR reserves the right under its Product Improvement Program to modify construction and/or design details without reference to illustrations and/or specifications shown herein.

PTR Baler & Compactor Company • 2207 E Ontario St. • Philadelphia, PA 19134
215-533-5100 • (FAX) 215-533-8907 • 800-523-3654 • www.PTRCO.com

SPECIFICATIONS

Charge Box Capacity 4 or 6 Cu Yd
Clear Top Opening 22" x 46"

PERFORMANCE CHARACTERISTICS

Cycle Time 28 sec
Total Normal Force 21,200 lbs
Total Maximum Force 25,300 lbs
Normal Ram Face Pressure 24.2 psi
Maximum Ram Face Pressure 29.8 psi

SPECIFICATIONS ELECTRICAL

Electrical Motor 3 hp, 3 Ph, Tri-Volt 208, 230, 460
Electrical Control Voltage 120 VAC
Total U.L Approved
Standard 3-Button Controls: On/Off Key Switch, Auto/ Reverse, Mushroom Stop, Connected to 13' Seal-Tite

SPECIFICATIONS HYDRAULIC

Hydraulic Pump Capacity 3 gpm
Normal Pressure 2400 psi
Maximum Pressure 2600 psi
Hydraulic Cylinder (2) 2.5" Bore

OPTIONS:

- Doghouse Enclosure
- Plastic Lids
- Security Chute
- Cart Dumper
- Deodorant System
- Oil Heater

Distributed by:

Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com