



Serving Lines, Fiberglass Ice Cooled Cold Pan models IC

model 14GFG IC-2 14GFG IC-3 14GFG IC-4 14GFG IC-5 14GFG IC-6
 14GFG IC-3S 14GFG IC-4S 14GFG IC-5S 14GFG IC-6S

Description:

Randell's 14GFG IC Series Ice Cooled Pan Units designed for virtually any cold food serving application, the 14GFG IC series is enclosed in brilliant one-piece fiberglass body and 14 gauge stainless steel top.

Specifications:

CABINET CONSTRUCTION: One-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers.

TOP CONSTRUCTION: Exterior top is standard in reinforced 14 gauge 300 series stainless steel with #4 finish.

ICE WELL CONSTRUCTION: The ice pans are constructed of die formed stainless steel and are provided with a drain and a gate valve. The gate valve is accessed through the louvered access door. Draining is accomplished by setting a bucket in front of the door and opening valve (simple and easy-eliminates floor drain requirements).

This equipment is intended for use in rooms having an ambient temperature of 86°F (30°C) or less.

Standard Features:

- Hinged access to drain gate valve
- Concealed locking mechanism with easy to use spring-activated catch

Additional Available Configurations:

- 14GFG IC "S" Series
Same basic construction of standard enclosed base series with an optional open shelf storage compartment. Available in the 4, 5 & 6 pan models to offer most efficient space capacity.

model 14GFG IC-6S shown with optional kick plate









Available Fiberglass Colors:

- Pitch Black
- Dark-Bark Brown
- Cabernet Wine
- British Racing Green
- Tin Man Gray
- True Blue
- Light Sky Blue
- Candy Apple Red
- Tiger Lilly Orange
- Canary Yellow
- White



Options & Accessories:

- Canopy
- Overshelves
- Trayslides
- Corian top
- Granite top
- Kick Plate
- Graphics
- Sneeze Guards
- Elementary School Height
- Electrical Distribution System



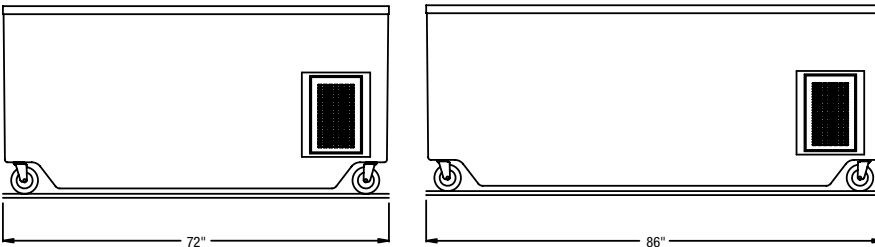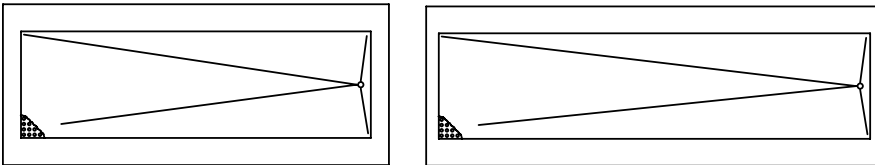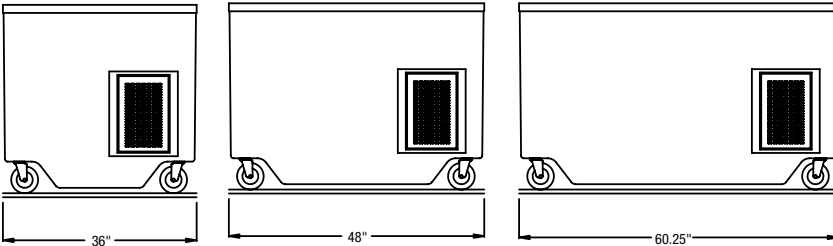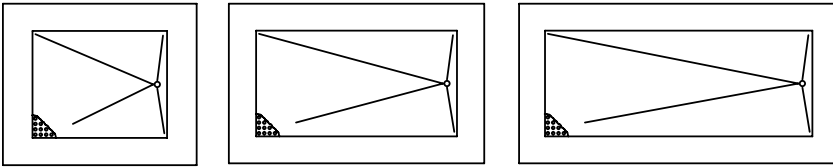

LEGEND FOR RANFG IC
 AFF = ABOVE FIXED FLOOR
 1" DIA PVC DRAIN LINE EXTENDS TO LOUVER



"S" Model

14GFG-IC DRAWINGS SHOWN, 14GFG IC-S FRONT VIEW SHOWN AS REPRESENTATION OF "S" MODELS

Drawings are to be viewed in the same order as the chart

COMMON DATA FOR IC SERIES

(INCLUDES THE STANDARD IC SERIES AND THE "S" STORAGE BASE SERIES)

| Model | L (A) | Top Depth | Work Height | No. of 12x20 wells | Ship Wt. |
|---------------|--------|-----------|-------------|--------------------|----------|
| 14GFG IC-2 | 36" | 30" | 35" | 2 | 250 |
| 14GFG IC-3(S) | 48" | 30" | 35" | 3 | 300 |
| 14GFG IC-4(S) | 60.25" | 30" | 35" | 4 | 350 |
| 14GFG IC-5(S) | 72" | 30" | 35" | 5 | 400 |
| 14GFG IC-6(S) | 86" | 30" | 35" | 6 | 450 |

STORAGE SHELF INFORMATION FOR IC "S" SERIES

2 & 3 pan not available with storage shelf (too small)

| Model | L(A) | W(B) | H(C) | Ship Wt |
|-------------|--------|-------|-------|---------|
| 14GFG IC-3S | 48" | 21.5" | 14.5" | 275 |
| 14GFG IC-4S | 60.25" | 33.5" | 14.5" | 325 |
| 14GFG IC-5S | 72" | 45.5" | 14.5" | 375 |
| 14GFG IC-6S | 86" | 59.5" | 14.5" | 425 |

