



# Reach-In Roll-In Single Door Heated model 2335

## Description:

Randell Series 2000 Single Section Heated Roll-Ins are built for years of efficient, high performance service. The heating system offers the highest, most consistent performance available while maximizing usable interior space.

## Finishes:

- Standard Series Doors/Louwer:** Stainless steel.  
**Exterior Sides:** Anodized aluminum. **Interior:** Anodized aluminum
- E Series** Cabinet interior, exterior sides, fronts, and doors stainless steel.

## Specifications:

**CABINET EXTERIOR:** Cabinet body is constructed of all metal, inside & out. The top, bottom, & back are galvanized steel. Front and sides are available in finishes as listed above. Door and louver are stainless steel and are removable without tools. Provided with stainless steel removable ramp.

**CABINET INTERIOR:** Interior of cabinet is fully coved to meet N.S.F. standard #4. Solid core stainless steel interior floor is standard. The interior walls, ceiling and door liner are available in either stainless steel or anodized aluminum as listed above. Foamed in place, CFC free urethane insulation. Stainless steel breaker strips. Provided with stainless steel rack guide.

**DOORS:** Stainless steel front with either anodized aluminum or stainless steel liner, mounted on (3) heavy duty cam lift hinges with heavy duty chrome handle, and cylinder door lock.


**HEATING SYSTEM:** Temperature settings are controlled with 60° F. to 180° F. solid state thermostatic control with high limit switch for customer safety. Heat is supplied with two strip heaters, located at the base of the interior. Heat is circulated by interior fan recessed in ceiling.




## Standard Features:

- 60° F. to 180° F. With High Limit Switch
- Digital Control
- Exterior LED Temperature Display
- Self-Closing, Cam Lift Hinges with 120° Open Feature (Lifetime Warranty)
- Triple Hinged Doors
- Cylinder Door Locks
- Solid Core Stainless Steel Interior Bottom
- Main Power Supply Switch
- Stainless Steel Interior Rack Guide
- Polyurethane Insulation
- Stainless Steel Removable Ramp
- Snap-In Magnetic Door Gaskets
- Fully Coved Interior meeting N.S.F. Standard #4

60°F to 180°F



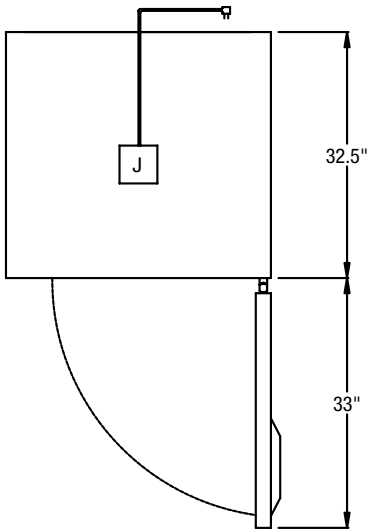


**LEGEND FOR MODEL # 2335**

**J** JUNCTION BOX  
208/230/60  
4.7 / 5.4 Amps  
.98 / 1.3 Kw

9' LONG CORD SET  
(NEMA 6-20P)

DESIGNED TO ACCOMMODATE  
66"H x 26"W x 29"D RACK  
ACTUAL CLEARANCE DIM.  
66.5" x 26.5" x 29.5" DEEP

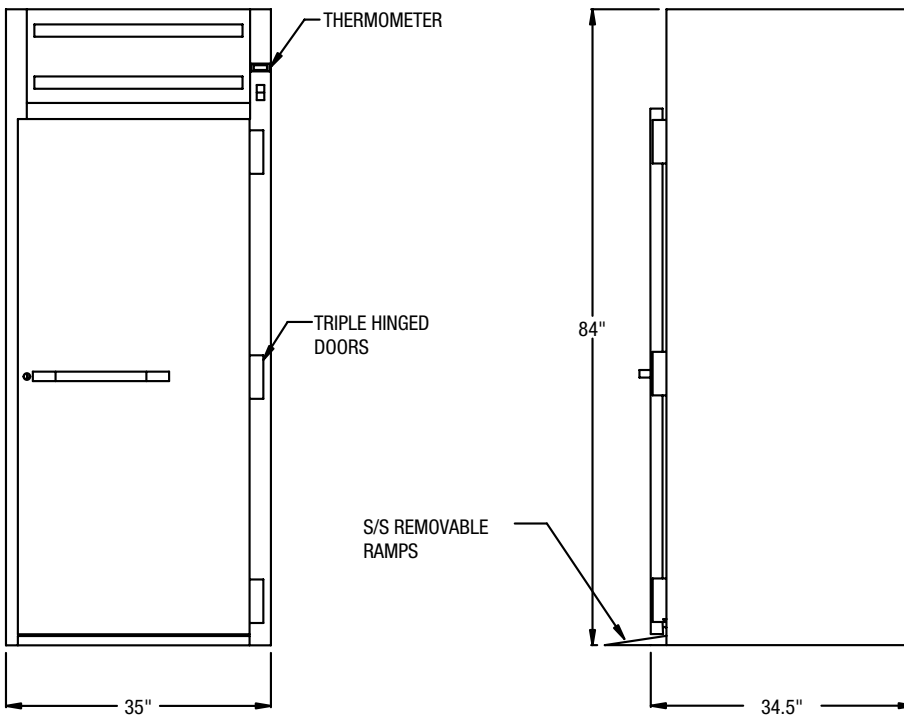

**NOTE:**

Unit designed to accommodate one 66" high x 26" wide x 29" deep rack.  
Actual rack clearance dimensions: 66 1/2" high x 26 1/2" wide x 29 1/2" deep.  
Actual door opening dimensions: 67 1/2" high x 28 1/2" wide.

Model	L	D	H	Doors	Cu./Ft.	KW	Volt	Amps	NEMA	Ship Wt.
2335 single door	35"	34 1/2"	84"	1	35	.98/1.3	208/230/60	4.7/5.4	6-15P	425

