



Custom SC Upright models 60000, 62000 & 63000

model 60324 62324 63324

Description:

24" long self-contained refrigerated upright unit with stainless steel top, fronts and sides. Available as a refrigerator, freezer, or dual-temp. Refrigerators utilize "CFC free", R-134a refrigerant, freezers use R-404a. Designed to fit integrally into unit line up. 6" high adjustable and movable legs.

Specifications:

CABINET EXTERIOR: Exterior body ends to be stainless steel. Back of unit to be corrosion resistant steel. Door opening frames are ABS and contain magnetic strip for positive seal of door gaskets. Louver panel to be die-stamped stainless steel. Legs to be 6" high stainless steel with adjustable bullet foot. Legs mounted to full length channel frame assembly which is integrally welded to bottom of body assembly. Legs can be moved left to right to avoid floor obstacles during installation.

CABINET INTERIOR: Base interior to be ABS thermoplastic at ends only. Stainless steel interior liner to be coved cornered to form bottom, back and top. One baked enamel finished shelf provided behind each door. Unit insulation to be CFC free foamed in place urethane.

DOORS: Door fronts to be 22 gauge stainless steel with 16 gauge stainless steel handles, magnetic gaskets, ABS door liner and foamed in place insulation. Hinges are concealed, all stainless steel with bronze pivot pin in nylon bushing.

REFRIGERATION: Refrigeration system to utilize "CFC Free" refrigerant. Interior fitted with Randell evaporator blower coil for cooling base. Blower coil fitted with expansion valve for fast recovery and thermostatic control for field adjustability. Hot gas condensate evaporator provided. Unit totally prewired and to be supplied with 8' cordset (NEMA 5-15P) for 115V operation.

62000 series freezer same as model 60000 series except unit to have 1/3 hp low-temp condensing unit utilizing R-404a refrigerant and automatic, self-defrosting system for freezer operation. Door frames to enclose heater elements to prevent gasket freezing. Back-up element installed.


63000 series dual-temp refig./freezer same as 60000 series except unit to have 1/2 hp low-temp condensing unit and double hookup to freezer section on top and refrigerator section utilizing R-404a. Freezer blower coil to have automatic self-defrosting system. Freezer door frame to enclose heater element to prevent gasket freezing. Back-up element installed.


model 60000 shown



Standard Features:

- Available as refrigerator, freezer, or dual-temperature unit
- 6" high legs—adjustable and movable
- Self-contained refrigeration system utilizes "CFC free" R-134a refrigerant. Freezers and dual temps. utilize R-404a refrigerant.
- Available with refrigerated drawers (Not available on dual temps)
- Foamed in place "CFC free" urethane insulation



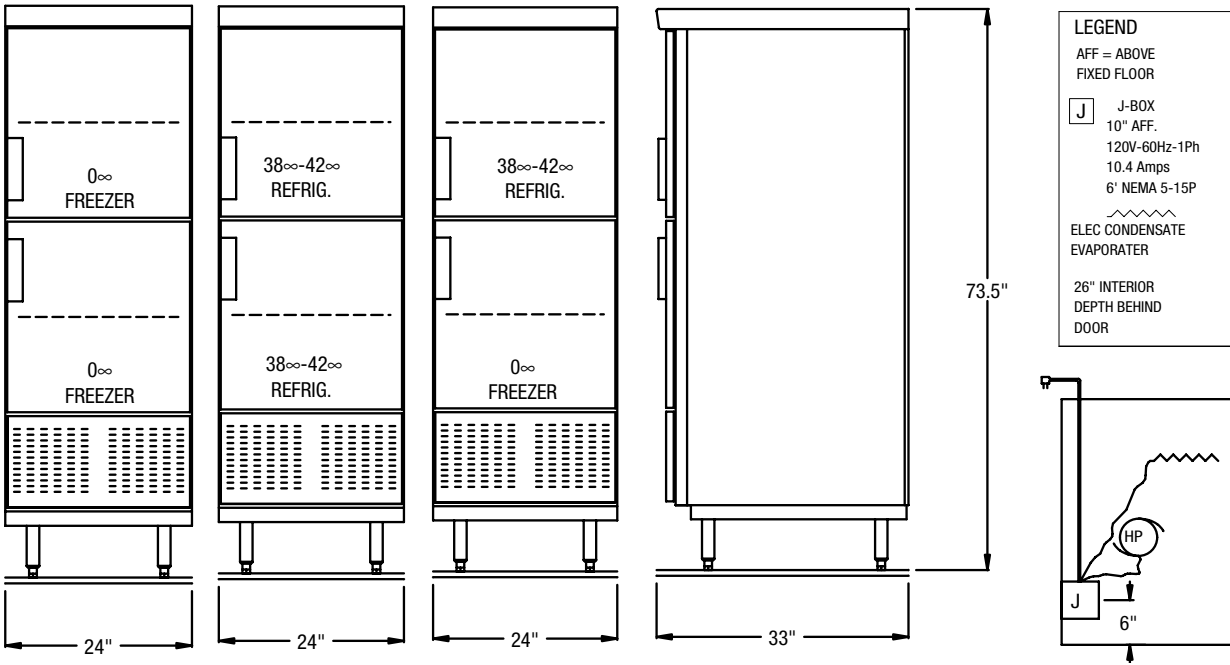

DOOR OPENING SIZES - INTERIOR DEPTHS

Door Width	Clearances Through Door		Interior Depth Behind Door
	Lt. to Rt.	Top to Bottom	(unit depths in parentheses)
24"	19 1/4"	20 1/4"	(33") - 26" (29") - 22"

- Shelf depth is 25 1/4" on 33" deep equipment, 21 1/4" on deep equipment.

29" DEEP EQUIPMENT		33" DEEP EQUIPMENT	
Length	24"	Length	24"
Height*	73.75"	Model No.	60324
Doors	(2) 1/2 size	Height*	73.75"
Storage (Cu. Ft.)	9.48	Doors	(2) 1/2 size
H.P.	1/4	Storage (Cu. Ft.)	11.2
Volts	115/60/1	H.P.	1/4
Amps	5.4	Volts	115/60/1
NEMA	5-15P	Amps	5.4
Ship Wt.	517 lbs.	NEMA	5-15P
		Ship Wt.	585 lbs.

29" DEEP EQUIPMENT		33" DEEP EQUIPMENT	
Length	24"	Length	24"
Height*	73.75"	Model No.	62324
Doors	(2) 1/2 size	Height*	73.75"
Storage (Cu. Ft.)	9.48	Doors	(2) 1/2 size
H.P.	1/3	Storage (Cu. Ft.)	11.2
Volts	115/60/1	H.P.	1/3
Amps	8	Volts	115/60/1
NEMA	5-15P	Amps	8
Ship Wt.	625 lbs.	NEMA	5-15P
		Ship Wt.	625 lbs.

29" DEEP EQUIPMENT		33" DEEP EQUIPMENT	
Length	24"	Length	24"
Height*	73.75"	Model No.	63324
Doors	(2) 1/2 size	Height*	73.75"
Storage (Cu. Ft.)	7	Doors	(2) 1/2 size
H.P.	1/2	Storage (Cu. Ft.)	7.85
Volts	115/60/1	H.P.	1/2
Amps	11.1	Volts	115/60/1
NEMA	5-15P	Amps	11.1
Ship Wt.	610 lbs.	NEMA	5-15P
		Ship Wt.	610 lbs.

* All units on 6" high adjustable, movable legs.

