



# Drop-In Wrapped Coldwall Cold Pan models 9900SCA/SCN

model  9918SCA  9928SCA  9943SCA  9957SCA  9972SCA  9986SCA  
 9946SCN  9966SCN  9987SCN

### Description:

Self-contained, wrapped coldwall drop-in refrigerated cold display

Meets NSF Std. #7 for holding 41°F. product temperatures.

### Specifications:

Condensing unit mounted on a swivel platform that allows for 90 degrees of rotation of intake/exhaust louver, giving customer the option of mounting our louver on any of the counters four sides. Model 9918SCA is not available with rotating compressor housing.

UNIT EXTERIOR: Top and covered corner interior to be constructed of 18 gauge stainless steel. Exterior body to be corrosion resistant steel. Condensing unit mounted on corrosion resistant framework, suspended below unit body. (1) stainless steel louver panel provided for field installation in counter.


UNIT INTERIOR: Exterior case of interior drain to Drain and Drain valve provided with 9/16" refrigerant insulated wire CFC free, reinforced plastic construction with condensing unit expansion valve and thermostatic control. Cordset for 115V operation.

REFRIGERATION: CFC free, R-404a refrigeration system to be wrapped refrigeration construction with thermostatic control for operator adjustability. Entire system mounted on corrosion resistant framework, suspended below unit body. 8' cordset (NEMA 5-15P) supplied for 115V operation.

### Standard Features:

- Swivel base condensing unit allows for unlimited location of the single air intake/exhaust louver (model 9918SCA is not available with rotating compressor housing).
- New Randell exclusive easy mount system
- Self-contained, wrapped refrigeration system with thermostatic control, system utilizes "CFC free", R-404a refrigerant
- Meets 1998 NSF Std. #7 - holds 41°F product temperatures
- All stainless steel top and covered corner interior
- Drain and gate valve provided
- Foamed in place, "CFC free" urethane insulation
- One dual air movement louver provided
- 9' cordset for 120V plug-in operation

model 9986SCA shown

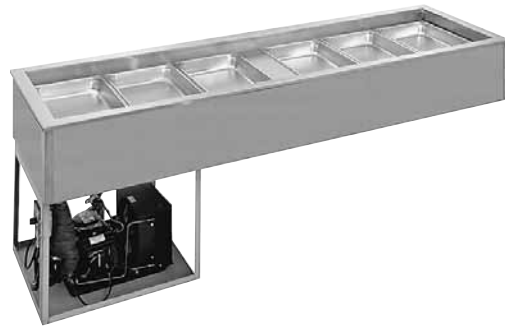


model 9966SCN shown




- Self-contained, refrigerated unit for cold display without ice
- Custom sizes available
- Easy installation with sliding hood, louver and hold down brackets

### Options & Accessories:

- Adaptor bars
- Remote on/off switch



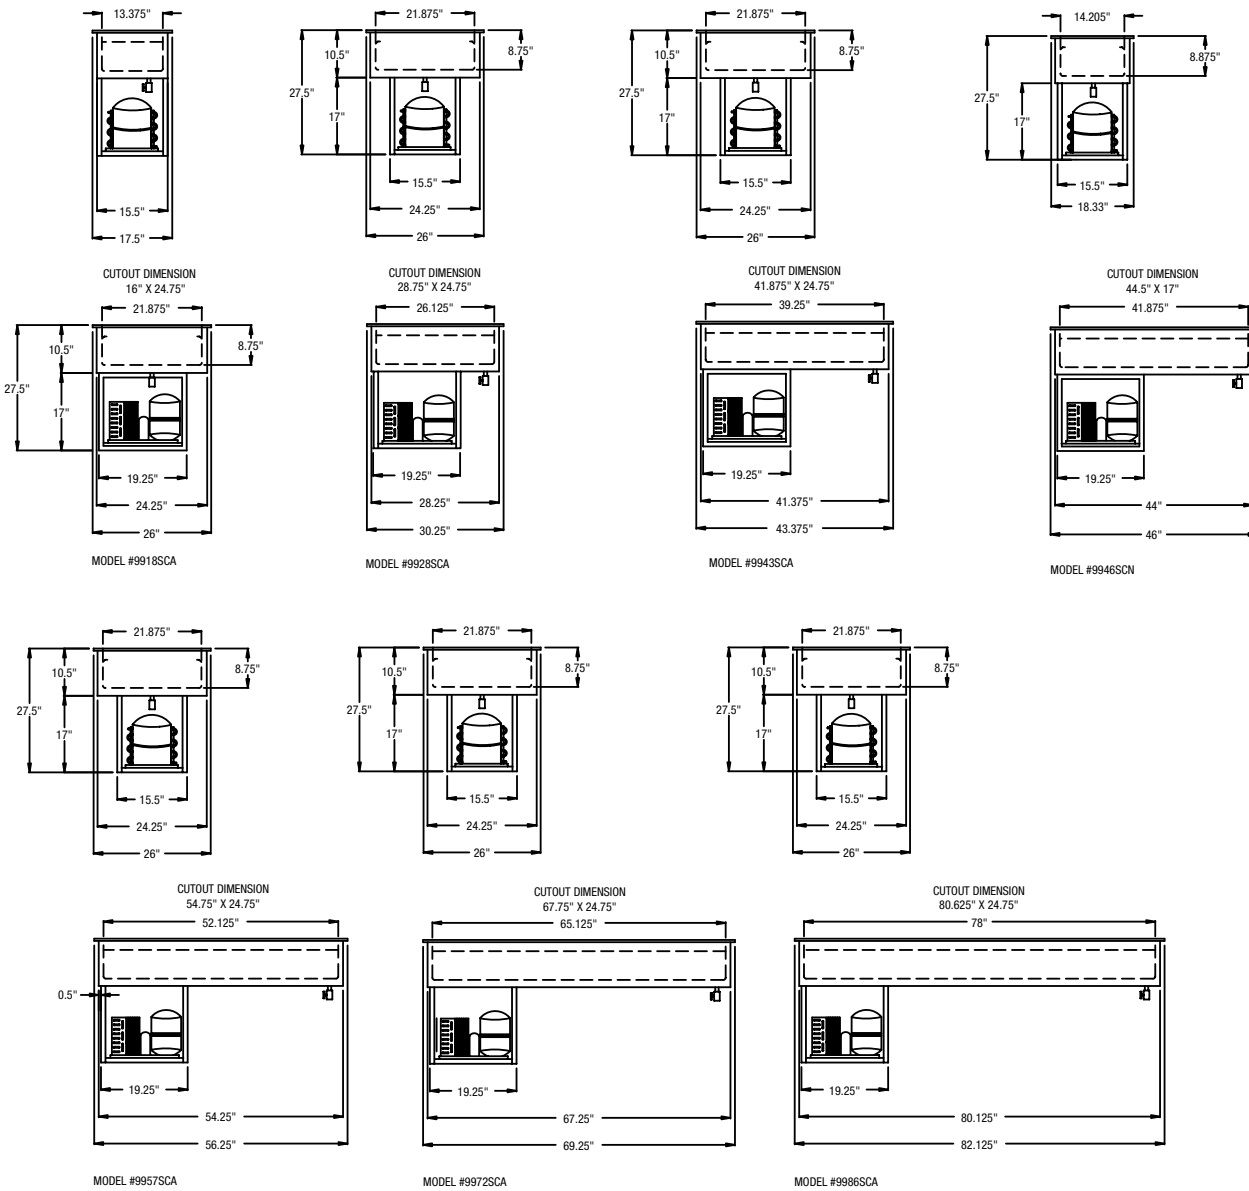

Model	12"x20" Pan Capacity	O/A Dimension		Cut Out Size		H.P.	Volts	Amps	NEMA	Ship Wt.
		Length	Width	Length	Width					
9918SCA	1	17 1/2"	26"	16"	24 3/4"	1/4	115/60/1	5	5-15P	110
9928SCA	2	30 1/4"	26"	28 3/4"	24 3/4"	1/4	115/60/1	5	5-15P	140
9943SCA	3	43 3/8"	26"	41 7/8"	24 3/4"	1/4	115/60/1	5	5-15P	175
9957SCA	4	56 1/4"	26"	54 3/4"	24 3/4"	1/4	115/60/1	5	5-15P	210
9972SCA	5	69 1/4"	26"	67 3/4"	24 3/4"	1/4	115/60/1	5	5-15P	245
9986SCA	6	82 1/8"	26"	80 5/8"	24 3/4"	1/4	115/60/1	5	5-15P	280
9946SCN	2	46"	18 5/16"	44 1/2"	17"	1/4	115/60/1	5	5-15P	140
9966SCN	3	66 3/4"	18 5/16"	65 7/16"	17"	1/4	115/60/1	5	5-15P	175
9987SCN	4	87 1/2"	18 5/16"	86 3/16"	17"	1/4	115/60/1	5	5-15P	210

