



Serving Lines, Stainless Steel Ice Cooled Cold Pan models IC

model RAN IC-2 RAN IC-3 RAN IC-4 RAN IC-5 RAN IC-6
 RAN IC-2S RAN IC-3S RAN IC-4S RAN IC-5S RAN IC-6S

Description:

Portable, stainless steel ice cooled cold pan serving station. 1" drain, and perforated strainer plates provided. Available with enclosed base or open storage. Foamed in place (CFC free) insulation. Interchangeable stainless steel or laminate body panels, snap together locking device designed to work with all other RanServe equipment. (4) swivel casters provided.

Specifications:

UNIT TOP: Top to be one piece of die-formed 16 gauge stainless steel with 1 1/2", 90° nosing on all sides. Unit fitted with 6" deep, ice cooled display cold pan. Interior of pan to be one piece, continuously welded construction of 18 gauge stainless steel. Interior fitted with 1" drain at one end. Drain nipple supplied with ball valve and lever extension to cabinet exterior on enclosed base units- drain lines run to accessible area. 1" high perforated, stainless steel bottom strainer plates provided.

UNIT BODY: Body frame to be all welded construction of steel with exposed corners to be 1 1/2" stainless steel. All corners welded and polished. Body ends and panels to be plastic laminate with galvanized steel backing (specify laminate color). Body ends and panels to be removable to allow the changing of colors. Cold pan insulated with high density (CFC free) polyurethane, foamed in place. Unit to be equipped with 4 swivel casters, (2) locking, that are recessed inside of toe area.

"S" series (Cafeteria style with open base) Same spec as IC series only "S" series units to have partial stainless steel panel on one side with undershelf. Undershelf to be 22 gauge stainless steel with integrally welded steel under-bracing. Ice cooled display pan to have ball valve, accessible thru storage area.

This equipment is intended for use in rooms having an ambient temperature of 86°F (30°C) or less.

Standard Features:

- Stainless steel ice-cooled cold pan with one piece interior
- Foamed in place (CFC free) high density polyurethane insulation
- Interchangeable body panels
- Concealed locking mechanism with easy to use spring-activated catch
- 1" drain, drain nipple and ball valve
- Stainless steel perforated strainer plates
- Swivel casters - (2) locking

model RAN IC-3 Enclosed Base shown





model RAN IC-3S Open Base shown



Options & Accessories:

- Canopy
- Overshelves
- Trayslides
- Corian top
- Granite top
- Laminates
- Graphics
- Sneeze Guards
- Elementary School Height



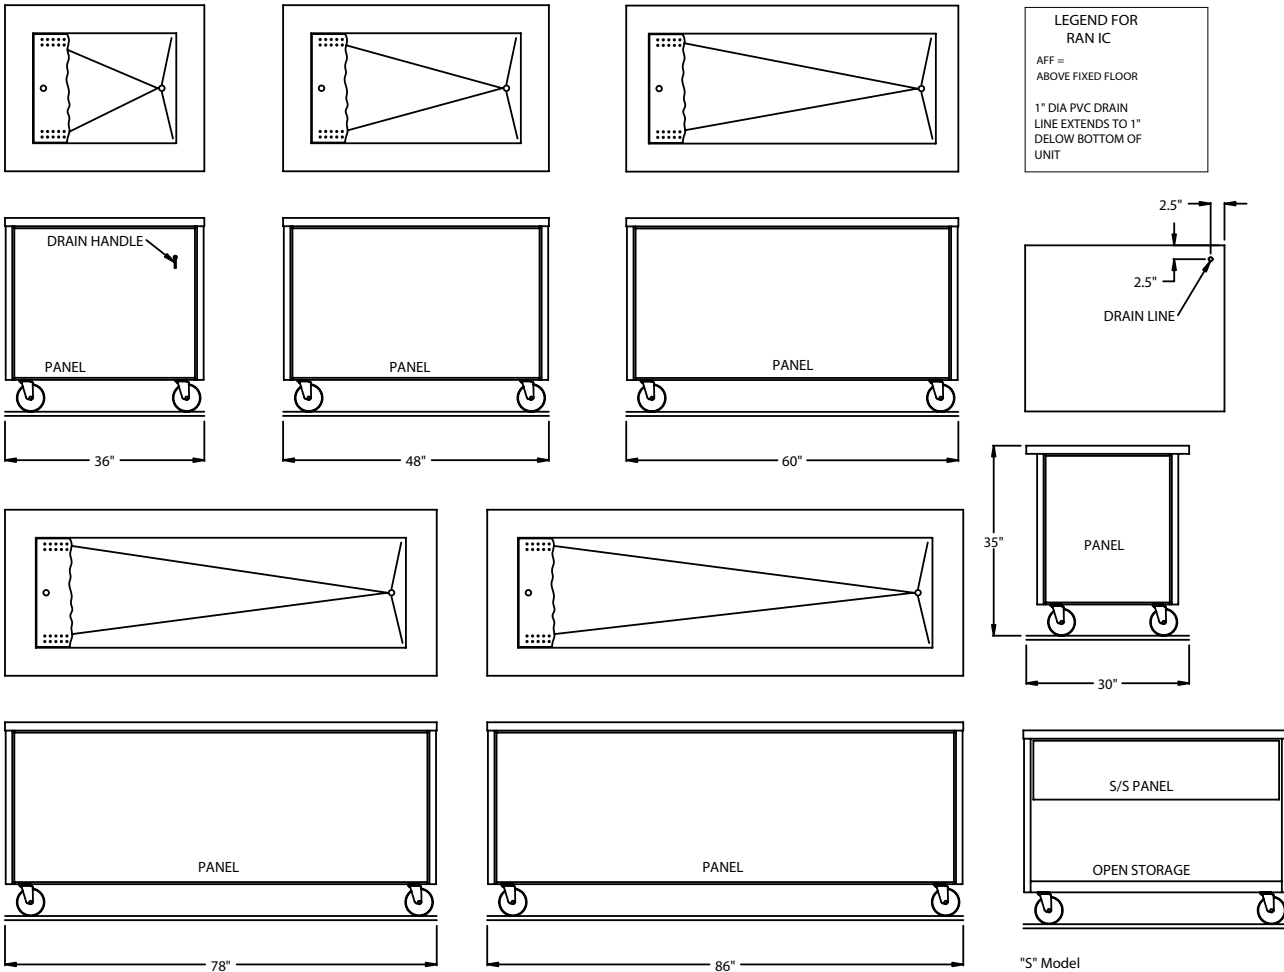

RAN IC DRAWINGS SHOWN, RAN IC-S FRONT VIEW SHOWN AS REPRESENTATION OF "S" MODELS
 Drawings are to be viewed in the same order as the chart

Model	Enclosed Base			12" x 20" Pan		Coldpan	Ship Wt.
	L	D	H	Capacity	Interior Dimensions		
RAN IC-2	36"	30"	35"	2	25" x 20" x 6"	140	
RAN IC-3	48"	30"	35"	3	38" x 20" x 6"	175	
RAN IC-4	60"	30"	35"	4	50.75" x 20" x 6"	215	
RAN IC-5	72"	30"	35"	5	63.75" x 20" x 6"	260	
RAN IC-6	86"	30"	35"	6	76.5" x 20" x 6"	310	
Open Base							
RAN IC-2S	36"	30"	35"	2	25" x 20" x 6"	140	
RAN IC-3S	48"	30"	35"	3	38" x 20" x 6"	175	
RAN IC-4S	60"	30"	35"	4	52" x 20" x 6"	215	
RAN IC-5S	72"	30"	35"	5	63.75" x 20" x 6"	260	
RAN IC-6S	86"	30"	35"	6	76.5" x 20" x 6"	310	