

201


SMALL PRODUCT VERTICAL L BAR SEALER

Advantages

- Versatile packager for smaller products up to 8" x 10"
- Small footprint pouch pack/kit packing system
- Significant cost savings over pre-made bags
- Easily interfaced with infeed systems
- Many available options



Standard Seal Assembly
Horizontal Seal Above
Vertical Seal



Pouch Pack Seal Assembly
Horizontal Seal Below
Vertical Seal
(For Multiple Loose Items)

Features and Options	201
Constant Coated Seal System	S
Tri Bar Seal System	N/A
Low Energy Seal System	N/A
Uptime Seal Jaw	O
Adjustable Jaw Opening	N/A
Tool-less Film Guides	N/A
Leg & Height Adjustments	S
Casters	S
Multiple Control Platforms	N/A
Light Screen Cycling Mechanism & Perimeter Interlocked Guarding	S
Jaw Guards	O
Discharge Conveyors	O
Pin Perforator	O
Electric Eye Film Registration	O
Header Sealer	O
Static Eliminator	O
Hole Punch	O
Film Cart	N/A
Powered Film Cradle	N/A
Trim Break Detection Eye	O
Trim Wind Up	S
Large Trim Wind Up	N/A
Spare Assemblies & Parts Kits	O
Servo Film Feed	O

Key: S=Standard, O=Optional, N/A=Not Applicable


Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com

Specifications

MODEL	201/201PP
Machine Dimensions	26" w x 29" d x 56" h (66 cm x 74 cm x 142 cm)
Standard Vertical Seal	8" (20.3 cm)
Standard Horizontal Seal	10" (25.4 cm)
Standard Jaw Opening	4½" (11.4 cm)
Electrical Requirements	110 v, 60 HZ, 1 ph, 8-14 amps*
Air Requirements	.12 CFM per machine cycle at 80 PSI**

*Special electrics available upon request

**CFM will vary depending on added options

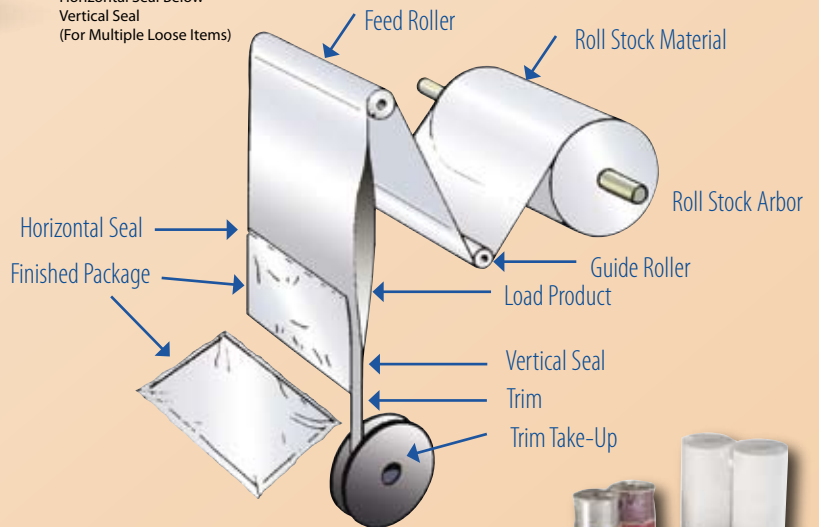

A or B wind material can be used on any of the Rennco vertical models. Bag size changeover is accomplished by simply changing roll stock to the desired width, and adjusting the vertical adjustment wheel or control for different lengths.
Rev 060310

PO Box 116
300 Elm St.
Homer, MI 49245
USA

www.Rennco.com

Toll-Free: 800-409-5225
International: 517-568-4121
Fax: 517-568-4798
Email: sales@rennco.com

