

501


LARGE SIZE PRODUCT VERTICAL L BAR SEALER

Advantages

- Versatile packager for large products
- Available in three different size configurations up to 24" x 65" in length
- User-friendly HMI and programmable changeover
- Significant cost savings over pre-made bags
- Easy to operate with quick, easy changeover
- Easily interfaced with infeed systems
- Widest range of features and options



Standard Seal Assembly
Horizontal Seal Above
Vertical Seal



Pouch Pack Seal Assembly
Horizontal Seal Below
Vertical Seal
(For Multiple Loose Items)

Features and Options	501
Constant Coated Seal System	S
Tri Bar Seal System	O
Low Energy Seal System	O
Uptime Seal Jaw	S
Adjustable Jaw Opening	O
Tool-less Film Guides	S
Leg & Height Adjustments	S
Casters	S
Multiple Control Platforms	O
Light Screen Cycling Mechanism & Perimeter Interlocked Guarding	S
Jaw Guards	O
Discharge Conveyors	O
Pin Perforator	O
Electric Eye Film Registration	O
Header Sealer	O
Static Eliminator	O
Hole Punch	O
Film Cart	O
Powered Film Cradle	O
Trim Break Detection Eye	O
Trim Wind Up	S
Large Trim Wind Up	O
Spare Assemblies & Parts Kits	O
Servo Film Feed	O

Key: S=Standard, O=Optional, N/A=Not Applicable

Specifications

MODEL	501-36/501-36PP	501-52/501-52PP	501-65
Machine Dimensions	34½" w x 63" d x 68½" h (88 cm x 160 cm x 174 cm)	34½" w x 82" d x 68½" h (88 cm x 208 cm x 174 cm)	34½" w x 98½" d x 68½" h (88 cm x 250 cm x 174 cm)
Standard Vertical Seal	14" (35.6 cm)	14" (35.6 cm)	14" (35.6 cm)
Standard Horizontal Seal	36" (91 cm)	52" (132 cm)	65" (165 cm)
Standard Jaw Opening	5½" (14 cm)	5½" (14 cm)	5½" (14 cm)
Electrical Requirements	220/240 v, 60 HZ, 1 ph, 7½-8 amps*	220/240 v, 60 HZ, 1 ph, 7½-8 amps*	220/240 v, 60 HZ, 1 ph, 8½-9 amps*
Air Requirements	.43-.60 CFM at 80 PSI**		


*Special electrics available upon request
**CFM will vary depending on added options

A or B wind material can be used on any of the Rennco vertical models. Bag size changeover is accomplished by simply changing roll stock to the desired width, and adjusting the vertical adjustment wheel or control for different lengths.

Rev 060310

PO Box 116
300 Elm St.
Homer, MI 49245
USA
www.Rennco.com

Toll-Free: 800-409-5225
International: 517-568-4121
Fax: 517-568-4798
Email: sales@rennco.com

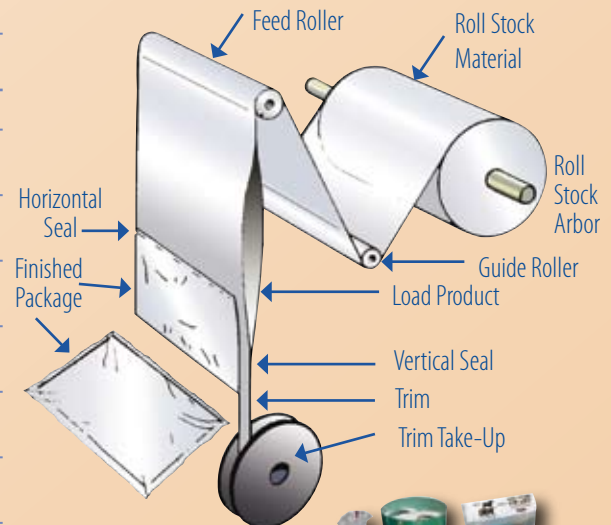

Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com