

LIFT SEAL™

Heat Sealer




Advantages

- Digitally controlled to ensure accurate sealing temperatures
- Simple, economical machine specifically designed for bagging of surgical instruments and supplies
- Compact and lightweight table top model
- Seals flat or gusseted paper/plastic, TYVEK™, Autopack™, and dust cover pouches; up to 24" wide with a ½" seal

Description

Rennco's Lift Seal heat sealing solution provides a compact, efficient alternative to impulse, band and rotary sealers. Rennco stands behind the Lift Seal™ with a 40-year tradition of innovation, experience and industry leading customer service and support.

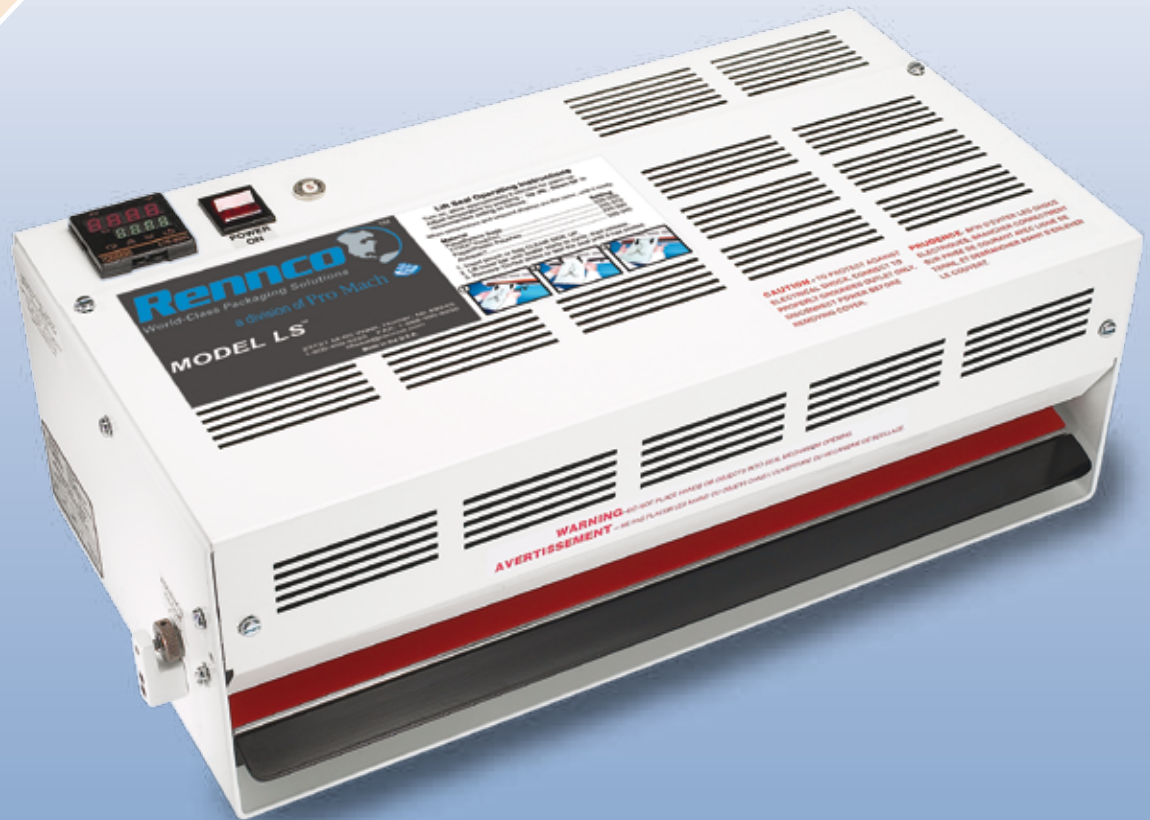

Model LS-18D seals pouches up to 18" wide
Model LS-24D seals pouches up to 24" wide
(Both produce a ½" seal)

Surgical Instruments and Supplies

Accommodates all sterile processing or sterile maintenance pouches including paper/plastic, TYVEK™, Autopak™, and dust cover pouches. Sealing conversions from one material to another requires only a temperature change.

Operation Summary

- 1** Begin use after a short "warm-up" period.
- 2** Simply enter the temperature setting for the material being used
- 3** Place the edge of the bag in the seal area
- 4** Lift the lower safety bar
- 5** In approximately 2 seconds, the lower safety bar automatically opens for easy removal of the sealed bag.



The Rennco Lift Seal™ Heat Sealer is easy to maintain as well as quick and simple to operate. Constant temperature is maintained by a digital temperature control during the sealing process. The lower silicone rubber bar is raised by a rugged mechanical drive to meet the stationary ½" wide heated sealing bar above. This bar is covered with a special "non-stick" fabric which is advanced by simply turning a knob as the fabric becomes worn. The fabric roll is ample for months of use and is quickly replaced by snapping the new roll into position.

Specifications

	LS-18D	LS-24D
Size	19-1/4" w x 10-1/4" l x 7-1/4" h	25-3/4" w x 10-1/4" l x 7-1/4" h
Shipping Weight	46 lbs	60 lbs
Electrical Requirements	120V, 5 amps	120V, 5 amps



The Lift Seal™ Heat Sealer will not cycle if an object exceeding 1/8" thick is in the sealing area, providing safe operation.



The Lift Seal™ automatically makes a ½" wide seal with approximately 30 PSI of consistent sealing pressure.

Specifications subject to change without notice

NRTL LISTED



Complies with
UL 73, UL 499
CSA 22.2 #68 CSA 22.2 #122
Listing-#E112078
Category-Sealing Equipment

Lift Seal is a trademark of Rennco, LLC, TYVEK is a registered trademark of DuPont, Autopak is a registered trademark of OnGard Systems

Rennco™
World-Class Packaging Solutions
a division of Pro Mach

PO Box 116
300 Elm St.
Homer, MI 49245
USA
www.Rennco.com

Toll-Free: 800-409-5225
International: 517-568-4121
Fax: 517-568-4798
Email: lifts@rennco.com

Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com