

# 顆粒狀物—自動包裝機

GRANULAR PRODUCTS-AUTOMATIC VERTICAL PACKAGE MACHINE

MODEL:SL-8711V

●全自動製袋—計量—充填—封口—切斷


FULLY AUTOMATIC FORM-MEASURE-FILL-SEAL-CUT OFF

**革命性地** 突破傳統式盲目操作法。可輕鬆地在5分鐘內，並且不必浪費半張膠膜之情況下，變換任何尺寸。

**REVOLUTIONARILY** breaking through traditional blind operation system.  
Within 5 minutes, no film waste conditions to change over any size.



●西德原裝電眼控制系統  
W. German web  
registration  
Control system

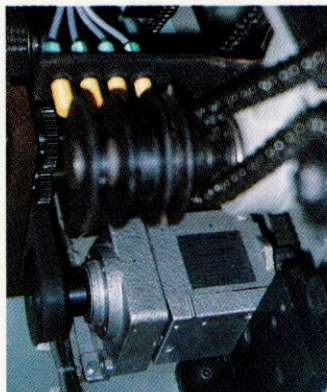

●西德原裝驅動控制系統  
W. German driving  
control system



●馨隆包裝機械有限公司

台北縣樹林鎮三俊街32巷13號

**Shing Loung Package Machine Co., Ltd.**

No. 13, Lane 32, San Jiun St., Su-Lin, Taipei Hsien,

Tel: (02) 689-1982, 689-2580 Telex: 33503 YIAU

TELEFAX : (02) 6894153



Packaging - Processing  
**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

# Packaging - Processing Bid on Equipment


1-847-683-7720

www.bid-on-equipment.com

三邊封口  
3 SIDES SEAL




四邊封口  
4 SIDES SEAL



## EXAMPLE OF PACKING TYPE

包裝完成之產品樣例

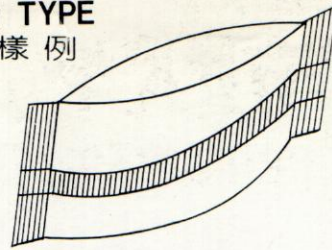

枕狀式  
PILLOW TYPE

### 適合包裝物：

- (1) 爆米花、小餅乾、乖乖、蝦味先、洋芋片等類似產品。
- (2) 花生、腰果、等類似之豆類產品。
- (3) 砂糖、茶葉、咖哩粉、糖菓等類似產品。

### 特點：

1. 數值化之設定，調整與操作：  
最先進的數值化控制 / 操作系統，使機器具備下列獨特的經濟效益：
  - (A). 操作簡單化：  
任何操作員，只需依照數值之指示，不需換齒輪或任何零件，便可在5分鐘內完成包裝尺寸之變換。毋需特殊經驗的操作員。
  - (B). 節省時間，免除材料之浪費：  
數值式之自動控制系統，可在5分鐘內不浪費包裝膠膜及產品的情況下，迅速完成尺寸之變換，然後可立即運轉生產而不必再校對電眼點，不同於其他品牌之包裝機在變換尺寸時或換膠膜卷時要變換許多齒輪或零件。同時要依賴有特殊經驗的操作人員慢慢地調整、摸索與校正，而使每次尺寸之變換或換膠膜卷時都要浪費很多的包裝膠膜和寶貴的時間。
  - (C). 降低成本，提高投資報酬率：  
機器可勝任多樣化之尺寸變換，讓使用者大大提高投資報酬率，並降低生產成本。
2. 採用西德名牌零組件：  
機器之主要零組件，如光電控制及驅動系統，均採用世界上最有名的西德品牌，確保最可靠之品質。

### 規格：

1. 包裝形式：枕狀式(三邊封口或四邊封口，可預先選擇)
2. 標準包裝尺寸範圍：50-250mm/長，50-150mm/寬
3. 包裝容量：0-300公克(視包裝物比重，密度而定)
4. 包裝速度：25-100包/分(可立即調整，視包裝尺寸大小，包裝膜厚薄及喂料速度而定)
5. 適用包裝膜：CPP, OPP/PE, OPP/PP, KOP, 玻璃紙, PET, 電鍍紙, 鋁箔合膠層等適合自動包裝機使用之材質。
6. 主力馬達：1HP, 50/60HZ
7. 機器尺寸：大約1250mm/長，720mm/寬，1900mm/高
8. 機器重量：大約450公斤
9. 機器顏色：橘紅色(可選)
10. 最大使用電力：2.9KW
11. 西德原裝電眼控制系統，可正確控制印刷之膠膜之定位切割。
12. 西德原裝電眼控制系統，使無膠膜自動停車。
13. 西德原裝電眼自動控制補料系統。
14. 西德原裝的全鋼製變速驅動系統。
15. 橫封口 / 刀機構，停車自動分開裝置。
16. 切刀位置調整機構，裝設可立即調整手輪，不用停車再調整。
17. 兩組可開啓 / 閉合之拉紙滾輪，確保封口牢靠及運轉順暢。
18. 可調整式量杯計量盤。

### 可選擇加裝的零配件：

- 日期打印機
- 頭端橫封口範圍加大並打洞
- 全自動喂料系統
- 電壓穩定器
- 出料輸送機
- 吹氣控制裝備
- 秤子式自動計量充填系統

### \*MAIN APPLICATIONS:

- (1). Pop-corn, crackers, cheese ring, corn curl, potato chips, snacks, etc. and the other similar products.
- (2). Peanuts, cashew, green beans, etc. and the other similar products.
- (3). Sugar, tea, curry powder, etc. and the other similar granules.

### \*IMPORTANT FEATURES:

1. Digit style setting, adjustment, and control:  
The most advanced digit control/operation system makes the machine own following valuable special benefits.
  - (A). Simplified operation:  
Any operator is only requested to follow preset indicators (without change-over gears or parts) to complete any size change-over within 5 minutes.
  - (B). Save time, avoid material waste:  
Within 5 minutes to complete size change-over or film-reel change-over adjustment under conditions of almost neither material nor time waste. Model: SL-8711V is much more advanced and advantageous than the other suppliers' machines. As an usual or a traditional packing machine must request experienced operators to do the job, on the other hand due to blind and complicated adjustment also to cause lots of material and time waste.
  - (C). Reduce cost, upgrade investing return:  
Due to simple size change-over for versatile application reduces users' production cost and upgrade investing return.
2. First class W. Germany origin parts:  
Famous W. German origin parts are intergrated into our machine, such as Erwin Sick's photo-electronic control system. Heynau steel variable speed drive system, etc. To ensure the reliable quality.

### \*SPECIFICATIONS:

1. Packing type: Pillow type (3 sides seal or 4 sides seal, optional)
2. Packing size range: 50-250mm/length, 50-150mm/width
3. Packing volume range: 0-300 grams (depending on products specific gravity and density)
4. Packing speed: 25-100bags/min. (depending on size, film thickness and filling speed)
5. Suitable package film: CPP, OPP/PE, OPP/PP, KOP, PET, Cellophane, metalized film, Alum. foil, etc. being suitable for automatic package machine use
6. Main drive motor: 1HP, 50/60HZ
7. Machine size: Approx. 1250mm/length, 720mm/width, 1900mm/height
8. Machine weight: Approx. 450kgs
9. Machine color: Orange (optional)
10. Max. power required: 2.9KW
11. Erwin Sick (W. Germany) photo-electric scanner to make machine stop automatically, whenever film-reel to be used up.
12. Erwin Sick (W. Germany) photo-electric scanner automatically controls products feeding system.
13. W. Germany origin steel variable speed drive
14. Production number counter
15. Horizontal sealing/cutting jaws always keeping open whenever machine stops.
16. Metadiametric gear drive to sealing/cutting jaws permits a quick synchronization adjustment while machine is running.
17. 2 sets of openable/closable vertical sealing rollers to ensure good sealing and smooth operation.
18. Adjustable volume type of volumetric cups measuring system.
19. Wooden case SIZE: 1800mm/L, 970mm/W, 2050mm/H

### OTHER OPTIONAL EQUIPMENT:

- \* Date coder
- \* Header package with hole punch
- \* Automatic feeding system
- \* Voltage regulator (stabilizer)
- \* Discharge conveyor
- \* Gas flush control equipment
- \* Automatic weighing scale measuring/filling system.