

固型物自動包裝

SOLID PRODUCTS-AUTOMATIC HORIZONTAL PACKAGE MACHINE


全自動製袋—充填—封口—切斷

FULLY AUTOMATIC FORM—FEED—SEAL—CUT OFF


革命性地 突破傳統式的盲目控制法，改採用最先進的高科技電腦化控制 / 操作法，使操作簡單化，縮短機器各部調整的時間及大量節省包裝膜之無謂浪費。

REVOLUTIONARILY breaking through traditional blind control system, thanks high technology; now we adopt advanced computer style control/operation system to save enormous package material waste and much time spent when any size change over.


西德原裝
電眼控制系統
W. German web
registration
Control system

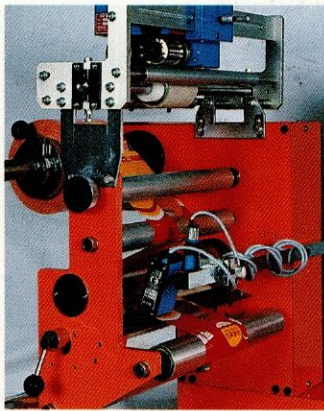

西德原裝
驅動控制系統
W. German driving
control system

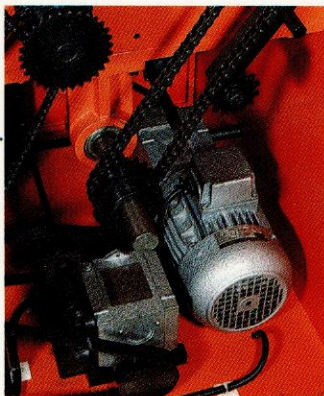

MODEL: SL-870H

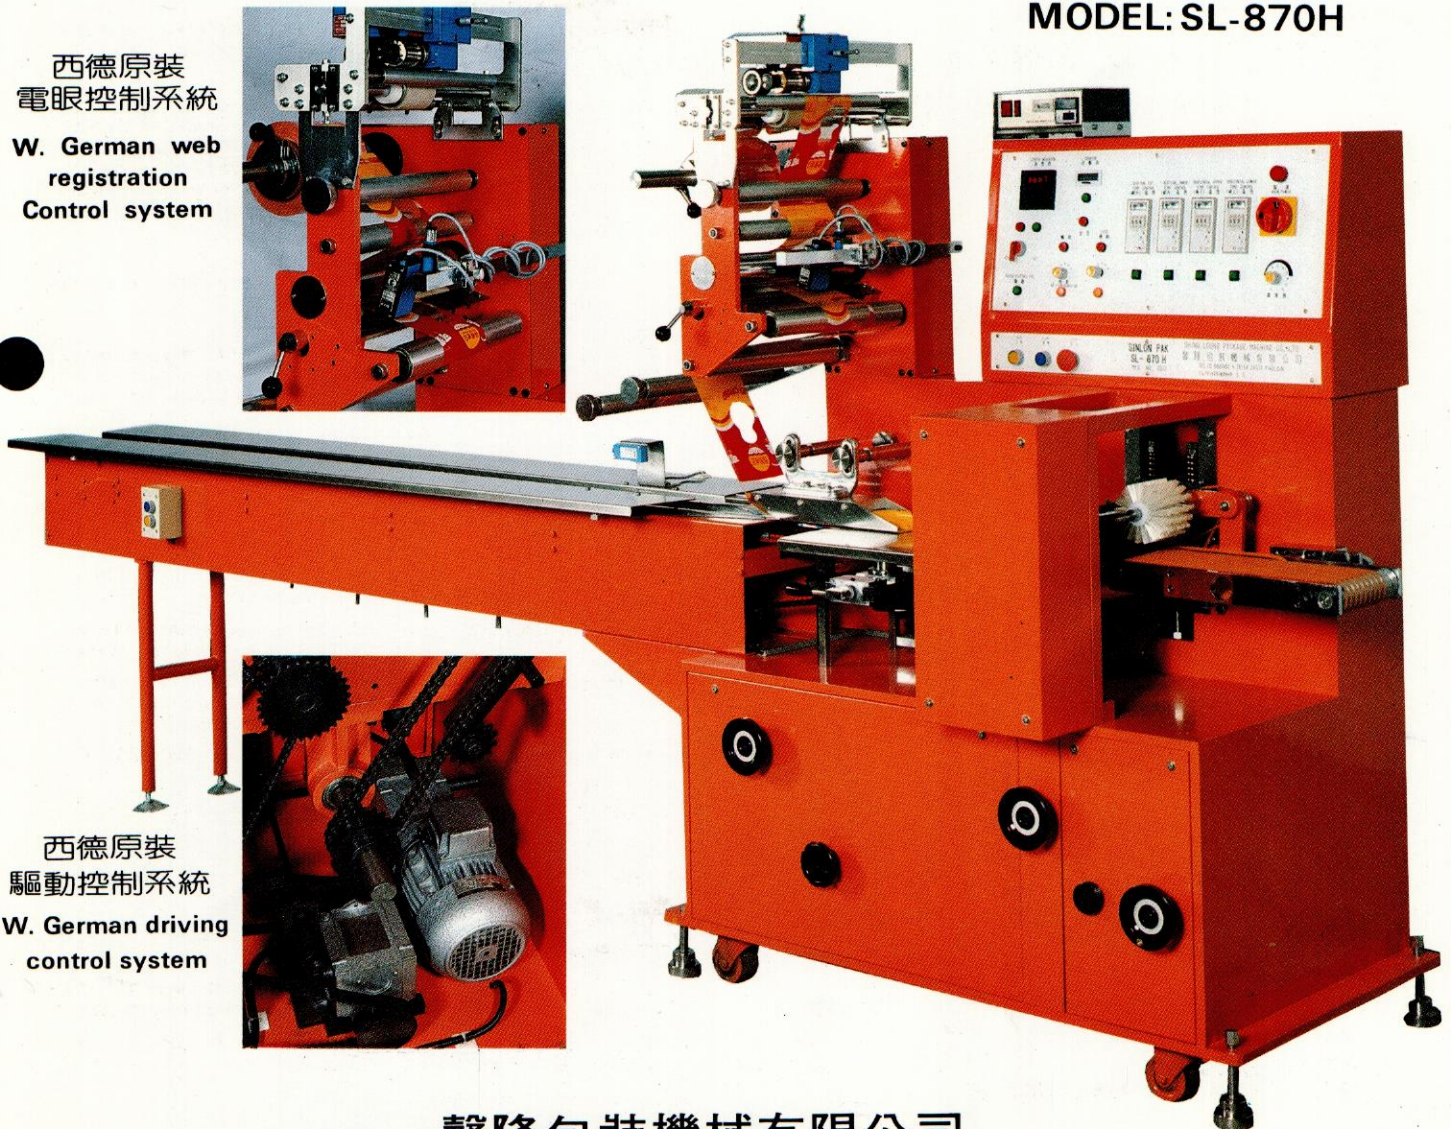

馨隆包裝機械有限公司

台北縣樹林鎮三俊街32巷13號

Shing Loung Package Machine Co., Ltd.

No. 13, Lane 32, San Jiun St., Su-Lin, Taipei Hsien, Taiwan, ROC

Tel: (02) 689-1982, 689-2580 Telex: 33503 YIAULOUN

TELEFAX: (02) 6894153




Packaging - Processing Bid on Equipment


1-847-683-7720

www.bid-on-equipment.com


EXAMPLE OF PACKING TYPE 包裝完成之產品樣例

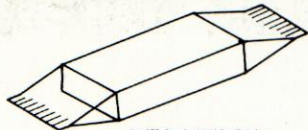


無摺角之枕狀式封口
PILLOW TYPE

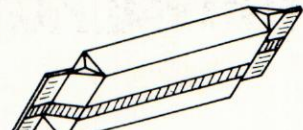


枕狀式(背封式)封口及兩端摺角
PILLOW TYPE WITH GUSSET

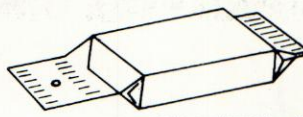

其中一個橫封口增長並打一圓洞
Header package with hole punch



收縮包裝
SHRINK PACKAGE



收縮包裝
SHRINK PACKAGE
WITH BACK TRIM

適合包裝物：

速食麵、冰棒、面紙、巧克力片、口香糖、鳳梨酥、月餅、米菓、各式餅乾、繃帶、肥皂、貼布、膠帶、便條紙、筆記簿、罐頭、沙茶醬、菓醬；用PVC或紙盒內襯之各式產品及其他類似之圓柱體，長方體，或不規則之固形物體均可適用。

備註：本型機再接上高速熱收縮爐，即可做高速自動收縮包裝之用途。

特點：

- 電腦化之設定，調整與控制：
最新式電腦化之數值及指示器的自動指示控制系統，使機器具備下列獨特的經濟效益：
 - 操作簡單化：
任何操作員，只需依照數值及指示器而調整，便可在5分鐘內，完成包裝尺寸之變換。毋需特殊經驗的操作人員。
 - 節省時間，免除材料浪費：
電腦式之自動控制系統，可以在極短暫的時間裏，並且幾乎不浪費包裝膠膜及產品的情況下，迅速完成尺寸之變換。大大不同於其他品牌之包裝機在變換尺寸時，都要有特殊經驗的人員慢慢地調整與摸索，而使每次尺寸之變換，都要浪費很多的包裝膠膜及產品和寶貴的時間。
 - 降低成本，提高投資報酬率：
機器可勝任多樣化之尺寸變換，讓使用者大大提高投資報酬率，並降低生產成本。
- 採用西德名牌零組件：
機器之主要零組件，如光電控制及驅動系統，均採用世界上最有名的西德品牌，確保最可靠之品質。

規格：

- 包裝形式：枕狀式(請參照上圖)
- 標準包裝尺寸範圍：80-400mm / 長，12-200mm / 寬，1-80mm / 高。
- 包裝速度：30-170包 / 分(視包裝尺寸大小，包裝膜厚薄及喂料速度而定。)
- 適用包裝膜：PP, CPP, OPP, KOP, PET, 鋁箔合膠層等適合自動包裝機使用之材料。
- 主力馬達(西德原裝)：1馬力，220 / 380VAC, 3相
- 機器尺寸：3500mm / 長，850mm / 寬，1520mm / 高
- 機器重量：大約900公斤。
- 機器顏色：橘紅色(可選)
- 最大使用電力：2.9KW
- 西德原裝電眼系統，可正確控制印刷之膠膜的定位切割。
- 西德原裝的光電控制系統，使不當喂料自動停車。
- 西德原裝的光電控制系統，使無膠膜自動停車。
- 西德原裝的全鋼製變速驅動系統。
- 六位數之計數器。
- 橫封口 / 刀機構，停車自動分開裝置。

可選擇加裝的配件：

- 日期打印機
- 兩尾端摺角設備
- 電壓穩定器
- 縱封口輪自動分開系統
- 頭端橫封口範圍加大並打洞
- 全自動喂料系統
- 重疊式背封設備

* MAIN APPLICATIONS:

Instant noodle, ice-bar, ice cream, pocket facial paper pack, choco-wafer, chocolate bar, chewing gum, Chinese style cake, biscuits, bandage, gauze, tape, swab, napkins, soaps, memo paper pad, note book, can/tray type pack of pickles, jelly, jam, etc. and the other sphere, cylinder, rectangular shape of solid substances.

Note: This machine can be connected with one set of high speed shrink tunnel to serve as a high speed automatic shrink package machine.

IMPORTANT FEATURES:

- Computer style setting, adjustment, and control:
Digits and indicators style automatic control system. Making machines own following valuable special benefits.
 - Simplified operation:
Any machine operator is only requested to follow preset indicators to achieve the size change-over within 5 minutes.
 - Save time, avoid material waste:
This system can quickly achieve size change-over adjustment under condition of almost neither material nor time waste. It is much different from the other suppliers' who request experienced operators to make size change-over. Due to blind and slow adjustment make lots of material and time waste.
 - Reduce cost, upgrade investing turn-over:
Versatile and simple change-over reduce users production cost and upgrade investing turn-over.
- First class W. Germany parts:
Famous W. German parts are integrated into our machine, Such as Erwin Sick's photo-electronic control system. Heynau steel variable speed drive system, etc. To ensure the reliable quality.

* SPECIFICATIONS:

- Packing type: pillow type (refer to the above example of packing type)
- packing size range: 80-400mm/length, 12-200mm/ width 1-80mm/ height
- Packing speed range: 30-170 bags/min. (depending on size, film thickness and feeding speed)
- Suitable package film: pp, CPP, OPP, PET, Cellophane, paper, alum. Foil etc., being suitable for automatic package machine use.
- Main drive motor: (W. Germany origin): 1 HP, 220/380VAC, 3 phase, IP54
- Machine size: 3500mm/length, 850mm/width, 1520mm/height
- Machine weight: Approx. 900 kgs
- Color: Orange
- Max. power capacity: 2.9KW
- Erwin Sick (W. Germany) photo-electric scanner for web registration control system.
- Erwin Sick (W. Germany) photo-electric scanner to make machine stop automatically, whenever any improper feeding.
- Erwin Sick (W. Germany) photo-electric scanner to make machine stop automatically, whenever film reel runs off.
- W. Germany origin steel variable steel drive
- 6 number of digit counter
- Horizontal sealing/cutting jaws always keeping open whenever machine stops.

OTHER OPTIONAL EQUIPMENT:

- * Date coder
- * Header package with hole punch
- * Automatic fin sealer engage/disengage system
- * Fully automatic feeding system
- * Voltage regulator (Stabilizer)
- * Gusset ends
- * Hot wire seal