

MD-V

Side seal plastic strapping machine

Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com




- *Low maintenance reduces downtime*
- *All-electric operation*

SIGNODE®

The MD-V side seal plastic strapping machine applies high, consistent strap tension to loads. The MD-V is ideal for a variety of applications, including cartons, palletized products, appliances, bulk bins, bales and bundled products.

MD Strapping Head

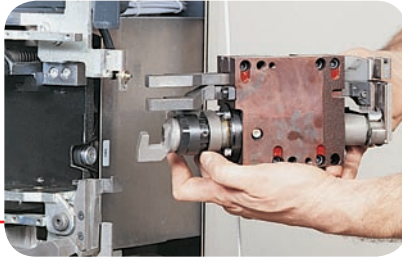

The MD-V machine utilizes the revolutionary clutchless, multi-motor MD strapping head with Signode's patented SwingWeld™ technology. Designed for reliable, low maintenance operation, the MD strapping head comes with a variety of features that make it simple to operate and easy to maintain.

- Sealing module can be easily exchanged to minimize downtime (see photo above)
- Automatic refeed of missed straps reduces downtime and minimizes waste (option)
- Fewer wearing parts lower maintenance costs
- Fixed settings eliminate adjustments
- High tension winder ensures consistent strap tension on every strap

High joint strength

Signode's patented SwingWeld technology is a vibration-weld that provides high joint strengths for maximum package reliability and performance.

Automatic strap loading

The MD-V machine is equipped with a fully automatic, high-speed strap loading system to maximize uptime.



Pivoting head cradle (option)

The MD-V machine can be equipped with a pivoting head cradle, which swivels out 90 degrees, providing complete access to both sides of the head. This option enables operators to service the head without removing it from the machine.



Options

- Spare sealing module
- Non-standard chute sizes
- Riser kit
- Allen-Bradley controls
- Low strap indicator
- Automatic refeed
- Operatorless interlocks
- Pivoting head cradle

Specifications

Chute sizes:

Contact Signode Sales Representative for sizes

Minimum load height: 6" (150 mm)
(conveyor dependent)

Feed and take-up speed:

5 to 13.5' (2 to 4 m) per second

Strap requirements:

9-16 mm polyester and polypropylene strapping

Strap tension:

Adjustable from 22.5 to 550 lbs
(100 to 2500 N)

Electrical:

230-480v, 3Phase, 60Hz

Shipping weight: 920 lbs (417 kg)

SIGNODE®

Signode Packaging Systems
3610 West Lake Avenue
Glenview, Illinois 60026
1-800-323-2464
www.signode.com