


SIMPLEX

FILLER COMPANY

MODEL 440

pressure filler

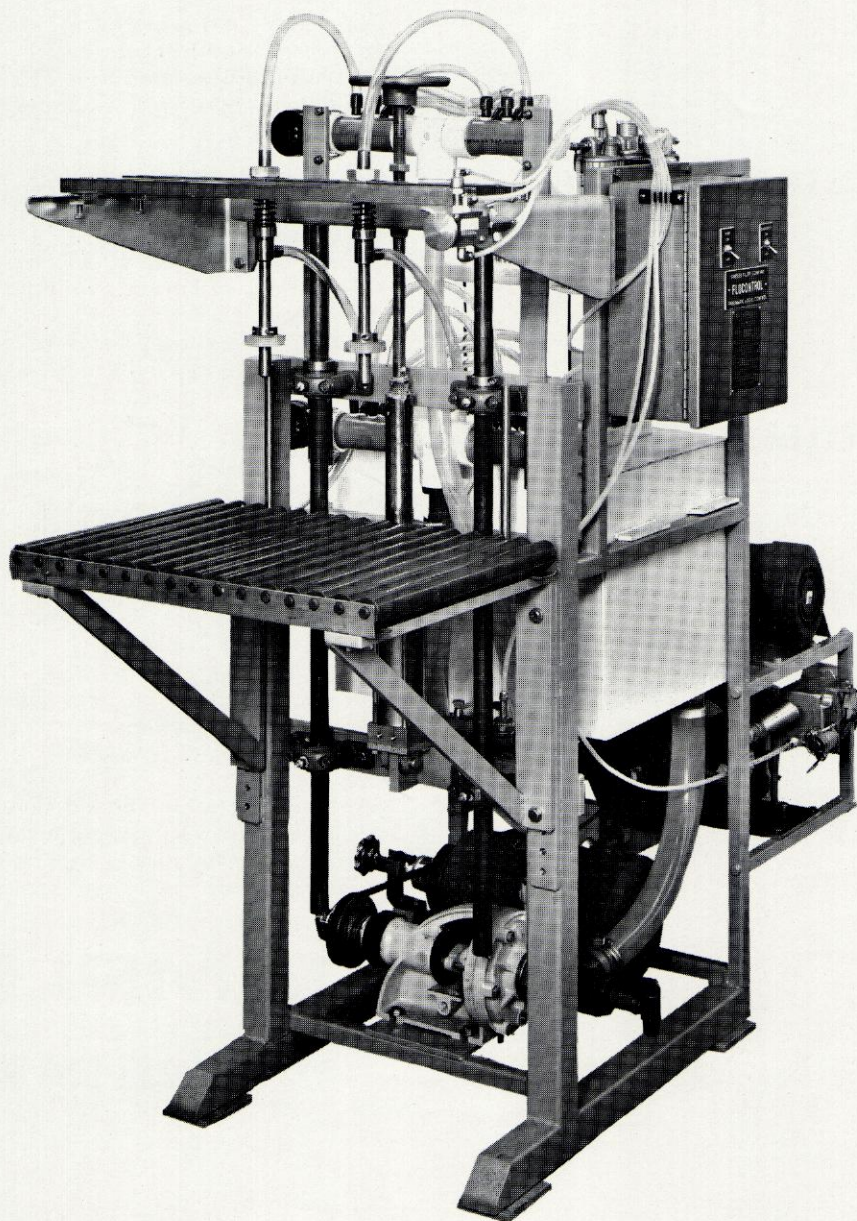

Combining high-speed performance with low-cost investment, the Simplex Model "440" is the finest pressure filler on the market. The superior advantage of this model is its high degree of *flexibility*.

■ Spouts are adjustable in five dimensions to accommodate glass, plastic or tin containers up to five gallons.

■ Change-over from one container, or product, to another can be made quickly and easily. ■ A wide range of free-flowing liquids, including foaming materials, can be accommodated—even corrosive chem-

icals with minor adaptation. ■ Automatic FLO-CONTROL provides accurate fill speeds up to 12 gallon containers per/min. or 36 quart containers per/min. depending upon number and size of containers, number of spouts, density, and temperature of fluid.

■ Vacuum Suck-Back system available for absolute no-drip operation.

■ The Simplex Model "440" is precision engineered to give years of dependable, maintenance-free service.

Packaging - Processing
Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

STANDARD EQUIPMENT

- Built-in, 14-gallon 316 Stainless Steel Supply Tank with Cover and Float Valve.
- Chemically-inert side panels—impact resistant—permanently impregnated color.
- Required cleaning solution can be added to supply tank and automatically circulated to clean all contact surfaces.
- Square steel tubing provides rigid frame.
- Air-actuated heads — eliminates manual operation during fill cycle.
- No-Container-No-Fill.
- Special Tools **not** required for change-over.
- Air Filter/Regulator/Lubricator.
- Head Manifold available in 316 stainless or PVC.
- Available in PVC with suitable pumps for corrosive products.

SPECIFICATIONS

- Electrical: 1/2 HP-110/220V-60C Single-phase motor, totally enclosed. All other standard motor specifications available.
- Air pressure required 60-80 lbs. 2-cu./ft. per minute.
- Wide variety of Pumps available to meet specific requirements.
- Spouts: 316 Stainless Steel & Teflon. Sizes: 9/16"; 5/8"; 3/4"; 1" dia.; Polyvinyl Chloride (PVC) 15/16" dia.

DIMENSIONS WEIGHT

DIMENSIONS:		WEIGHT:	
INCHES	METERS	LBS.	KILOS
22" wide	.56	300 net	136
40" deep	1.02	500 crated	227
68" high	1.73		

ACCESSORIES OPTIONAL EQUIPMENT

- FLOCONTROL, automates entire cycle.
- Fully Automatic system available.
- Roller Conveyor Table (1-1/2" Centers).
- Transfer Pump for foamy products.
- Explosion Proofing, for flammable liquids.
- Locktite Caster Mounting, for mobility.
- Hand Wheel Height Adjustment, for change in container height.
- Variable Pump/Motor Speed Control.
- Suck-Back System for absolute no-drip operation.
- Foam Transfer for highly foaming products.
- Extra-wide setup for larger containers.

SIMPLEX


FILLER COMPANY




3450 ARDEN ROAD, HAYWARD, CALIFORNIA 94545

TELEPHONE: (415) 785-8010

Simplex has a staff of experienced engineers. Let us help you develop the proper equipment for your production requirements.

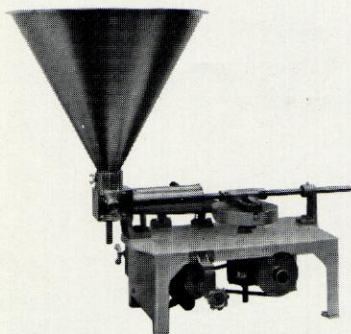

Model "A-S"
Single Piston Filler

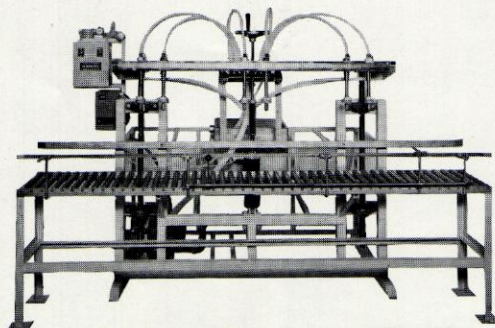

Model "400" Pressure Filler

YOUR REPRESENTATIVE:

**Packaging - Processing
Bid on Equipment**

1-847-683-7720

www.bid-on-equipment.com