


MODEL "DUAL T"

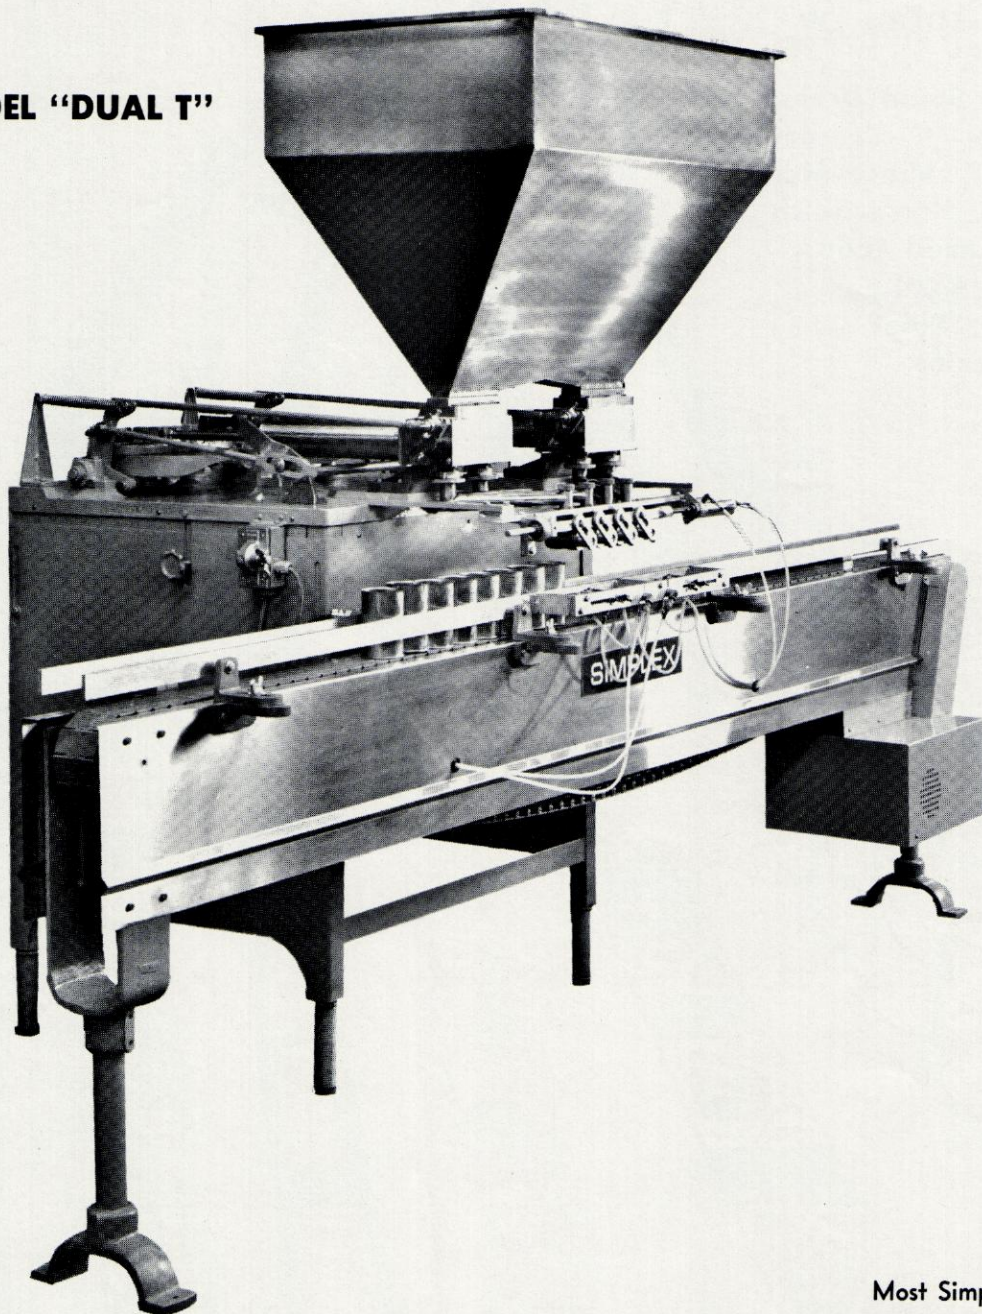

Most Simplex Machines
Approved by U.S.D.A.

SIMPLEX MODEL "DUAL T" TWIN PISTON FILLER (Four Pistons)

Complete with . . . stainless steel contacts; Vari-Speed Drive for full speed range; Hand Lever Shut-Off; adjustable height Floor Stand; minimum to maximum Cam for maximum fill adjustment; all standard specification motors available (1 HP); unit fills up to 65 fluid ounces each cylinder.

OPTIONAL EQUIPMENT:

Various types of Hoppers available; independently driven Agitators available; Rising Table for Bottom-Up Fill; No Container/No Fill; a variety of Cut-Off Spouts for no-drip operation; may be utilized with your existing conveyor system or conveyor systems furnished by Simplex. Interchangeable cylinders and spouts, adapter to fill from bulk storage, explosion proofing, Unscrambler Tables, and Accumulator Tables also available.