




THE SMITH COMPACT CHOCOLATE COATING LINE SERIES

(MODELS A & B)

SMITH COMPACT LINE

MODEL A
7 INCH/17.8 cm
(WITH LEFT CONTROLS)

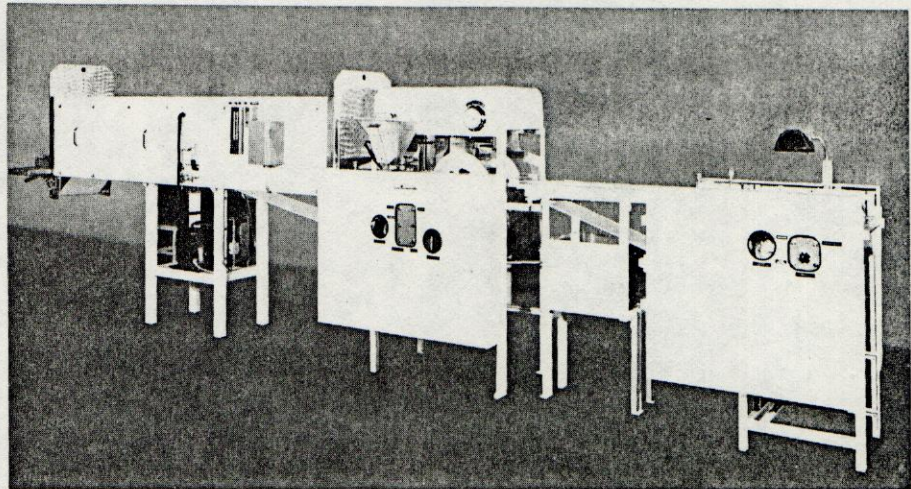


For the tightest possible space, never before complete installations in such small, profit-loaded packages! Full coating line: Prebottomer, Cold Plate, Coater, and single unit SMITH Con Rad Cooling Tunnel . . . simple, reliable, efficient. Flexible for future expansion, too. Add a feed table or cream center former to the prebottomer, or extra tunnel sections with drive speed increases for extra capacity.

LENGTH & SPEED SPECIFICATIONS	MODEL A		MODEL B		BELT WIDTH		CAPACITY PER HOUR*			
	inches	cm	inches	cm	inches	cm	MODEL A		MODEL B	
							Lbs.	Kilos	Lbs.	Kilos
Overall Length	216	550	364	675	5	12.7	60	27	90	41
Tunnel Section Length	96	244	144	366	7	17.8	80	36	120	55
Belt Speed Per Minute	20	50	30	75	10	25.4	100	45	150	68
					12	30.5	120	55	180	82

* Assumes candy pieces spaced 2 inches/5cm between their centers on belt, and average finished weight of 30 pieces per pound/66 pieces per kilo, continuous operation.

Load directly on wire belt of standard SMITH prebottomer with special short cold plate. Coater is standard SMITH fixed speed unit plus integrated tunnel belt drive. Tunnel is extra capacity version of our popular CON RAD single unit, available in two lengths (above) with your choice of indicated belt speeds and line capacities, delivered ready for your easy installation. Specify any world electric power, finish color (gray or white), and left or right controls (see illustrations).

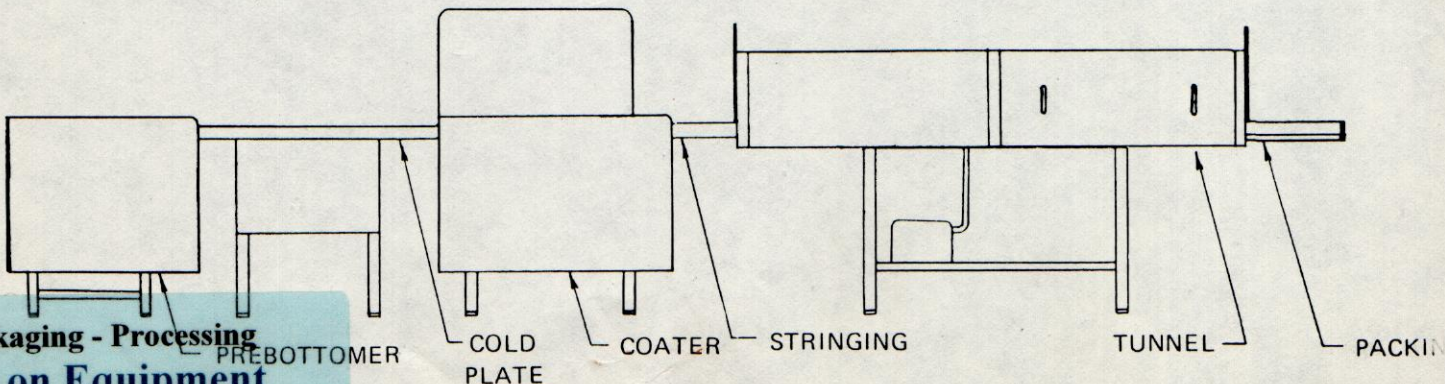

Packaging - Processing
Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

SMITH COMPACT LINE LAYOUT with facing side for "right" controls.