


- Flow rates up to 428 gph
- Pressure up to 10,150 psi

Options

- Diaphragm pumpheads with hydraulically actuated double diaphragm and patented diaphragm position control system (PDPC)
- Plunger pumpheads

Combinable with all gear sizes of
Bran+Luebbe's horizontal NOVADOS range

NOVADOS H2 Metering Pumps

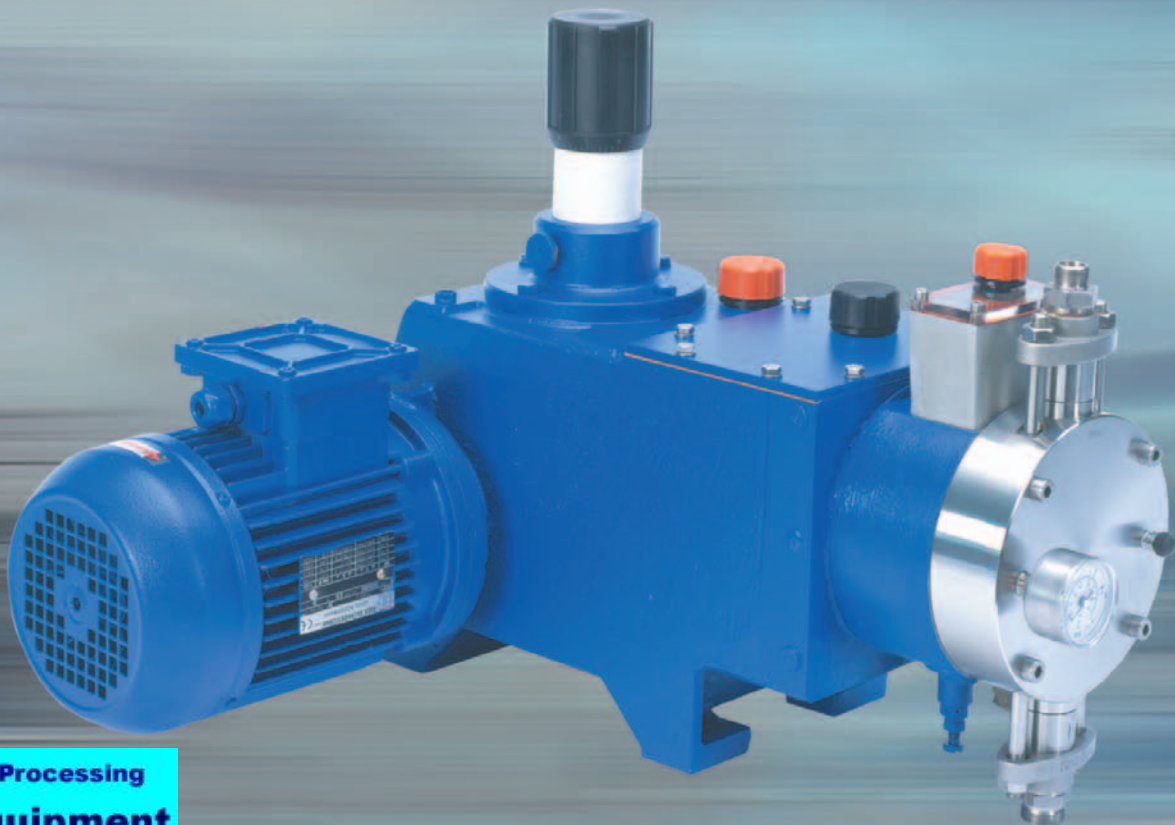

Packaging - Processing

Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

General Specifications

Materials of construction of liquid-wetted parts

- Housing of stainless steel, 316 or duplex, alternatively, PVC or PP.
- Diaphragms of PTFE or stainless steel 1.4310.
- Plungers of stainless steel, ceramic or tungsten carbide.
- Options: Materials such as Super Duplex, Hastelloy, Titanium, Halar® coating or PVDF, and others available.

Pump Gear Design

- Worm gear with five different reduction ratios.
- Integral housing utilizing modern seal technology.
- Splash lubricated gear components.
- Large oil sump.
- No external oil pump.
- Suitable for variable speed.

Stroke Length Adjustment

- Eccentric (Z-shape) variable crankshaft.

Flow Rate Control

- Manually, electrically, or pneumatically during operation and standstill.

Driver

- 2- or 4-pole electric motor with fixed or variable speed.

Applicable Standards

- VDMA 24284 and 24286-10.
- API 675 2nd edition.

CE-Marking

- 98/37/EC (Machinery Directive).
- 94/9/EC (ATEX) max. II 2G EEx c IIB T4.

Weight, according to equipment (without motor) approx. 150 - 350 lbs.

Flow Rate and Pressure for Single Pump

Pumphead Type		Diaphragm		Plunger	
Material of displacement body		PTFE		TC, Ceramic or St. Steel	
Housing Material		St. Steel / Plastic		St. Steel or Plastic	
Flow rate at 204 spm	Plunger Size	Max. Operating Pressure		Nozzle Size	
gph	ø mm	psig			
0... 0.7	3	-	-	7,250	1/2"
0... 1.9	5	1,500	10,150	7,250	1/2"
0... 2.7	6	1,500	10,150	7,250	1/2"
0... 4.9	8	2,320	7,250	7,250	1/2"
0... 7.6	10	4,570	4,570	4,570	1/2"
0... 10.9	12	3,205	3,205	3,205	1/2"
0... 19.5	16	1,800	-	1,800	1/2"
0... 30.5	20	1,160	1,160	1,160	1/2"
0... 47.6	25	740	740	740	1/2"
0... 68.5	30	510	510	510	1/2"
0... 98.7	36	350	-	350	1/2"
0... 134	42	260	260	260	1/2"
0... 190	50	190	-	190	1"
0... 239	56	150	-	150	1"
0... 293	62	116	-	116	1-1/2"
0... 352	68	101	-	101	1-1/2"
0... 428	75	87	-	87	1-1/2"

1) Max. operating pressure of actual pumps may deviate from figures stated. Pumps with housing material of plastic are generally limited to max. 150 psig operating pressure.

- Flow rates at 100% volumetric efficiency. Please allow for transmission losses.
- Metering accuracy: as good as $\pm 0.5\%$ of flow rate set point.
- Selectable stroking speeds: 60, 76, 86, 102, 120, 152, 172, 204 spm (min^{-1}).

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit our web site.

Web Site: www.spxprocessequipment.com • E-Mail: bl@processequipment.spx.com



Bran+Luebbe, 611 Sugar Creek Road, Delavan, WI 53115 Telephone: (800) 252-5200, (262) 728-1900 Fax: (262) 728-4904

SPX Process Equipment reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Certified drawings are available upon request.

Issued: B-105-L-11/06

© 2006 SPX Process Equipment