


Compact Heavy Duty Multipurpose Bronze Pumps FB-8 series

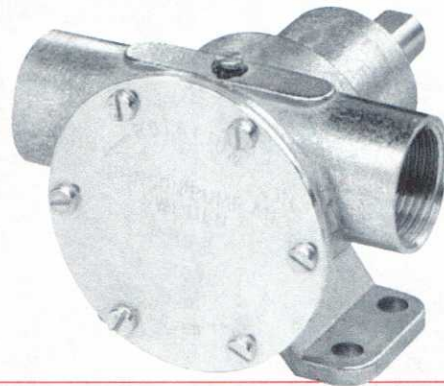

Typical applications



- **Marine**
Engine cooling, bilge pumping, wash-down, emptying holding tanks.
- **Industry**
Liquid circulation and transfer, emptying tanks and sump drainage, handling of solids in suspension.

Design features

- Body: Bronze
 Impeller: Neoprene or nitrile
 Shaft: Stainless steel
 The shaft is mounted with two permanently lubricated double ball bearings
 Shaft seal: F35B-8 – F7B-8: Lip or mechanical seal
 F8B-8: Mechanical seal
 Cam: Full or reduced
 Connection: See dimensional table
 (NPTF ports on request)

Capacity range

Neoprene impeller – 1400 rpm – Full cam – Water at 20°C

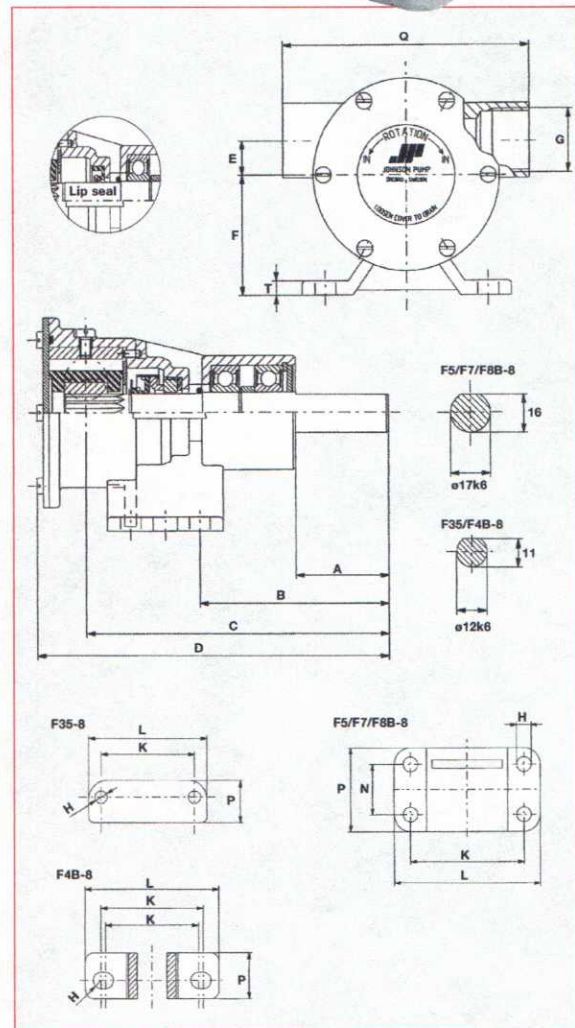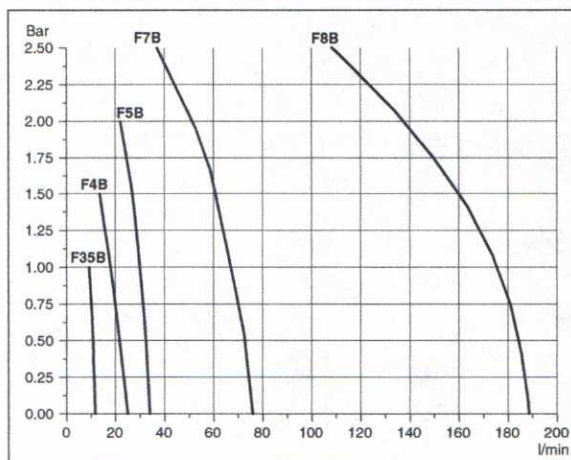

Dimensional table

Pump	Art. No.	Shaft seal	A	B	C	D	E	F	G	H	K	L	N	P	Q	Weight
F35B-8	10-24569-01	Mech. Seal	30	53.7	93.7	108.5	11	30	BSP 3/8"	ø7 (2x)	53	66	-	23	80	0.5 kg
F35B-8	10-24569-13	Lip seal	30	53.7	93.7	108.5	11	30	BSP 3/8"	ø7 (2x)	53	66	-	23	80	0.5 kg
F4B-8	10-24570-01	Mech. Seal	30	76.7	94.2	110.5	17.5	50	BSP 3/8"	ø8.6 (2x)	52/57.2	75	-	25	80	0.8 kg
F4B-8	10-24570-13	Lip seal	30	76.7	94.2	110.5	17.5	50	BSP 3/8"	ø8.6 (2x)	52/57.2	75	-	25	80	0.8 kg
F5B-8	10-24571-01	Mech. Seal	40	81	130	151	14.3	50	BSP 3/4"	ø9 (4x)	70	90	30	50	106	1.6 kg
F5B-8	10-24571-13	Lip seal	40	81	130	151	14.3	50	BSP 3/4"	ø9 (4x)	70	90	30	50	106	1.6 kg
F7B-8	10-24572-01	Mech. Seal	40	81	138.2	170	14.3	50	BSP 1"	ø9 (4x)	70	90	30	50	120	1.9 kg
F7B-8	10-24572-13	Lip seal	40	81	138.2	170	14.3	50	BSP 1"	ø9 (4x)	70	90	30	50	120	1.9 kg
F8B-8	10-13001-1	Mech. seal	50	81.5	177.5	217	27	65	BSP 1 1/2"	ø10.5 (4x)	80	105	45	70	160	5.9 kg