


Long Radius Series Finishing Mills

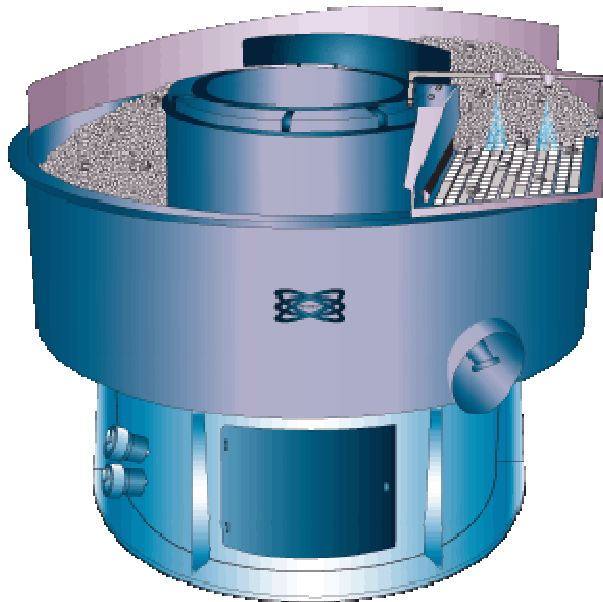

FMD-1LR

Capacity	1 ft ³ (300 lbs. load capacity)
Maximum Straight Part Length	9 inches
Motion Generator	1/3 hp, TENV, 1200 RPM, single phase 115 volt; 3-phase 230, 460 or 575 volt. 60 Hz. (non-reversing)
Vibralite Bowl	Chamber - all cast polyurethane elastomer with 3/4" minimum thickness in high wear areas
Shipping Weight	195 lbs. (empty)

FMD-3LR

Capacity	3 ft ³ (900 lbs. load capacity)
Maximum Straight Part Length	15 inches
Motion Generator	1 1/4 or 2 1/2 hp, TENV, 1200 RPM, 3-phase 230, 460, or 575 volt. 60 Hz. (non-reversing)
Lining	Abrasion-resistant lining of cast polyurethane with 3/4" minimum thickness in high wear areas.
Shipping Weight	850 lbs. (empty)

FMD-4LR

Capacity	4 ft ³ (1200 lbs. load capacity)
Maximum Straight Part Length	18 inches
Motion Generator	2 ½ hp, TENV, 1200 RPM, 3-phase 230, 460, or 575 volt. 60 Hz. (non-reversing)
Lining	Abrasion-resistant lining of cast polyurethane with ¾" minimum thickness in high wear areas.
Shipping Weight	960 lbs. (empty)

FMD-7LR-2

Capacity	7 ft ³ (2100 lbs. load capacity)
Maximum Straight Part Length	20 inches
Motion Generator	5 hp, TENV, 1200 RPM, 3-phase 230, 460, or 575 volt. 60 Hz. (non-reversing)
Lining	Abrasion-resistant lining of cast polyurethane with ¾" minimum thickness in high wear areas.
Shipping Weight	Approximately 1620 lbs. (including control panel)

FMD-10LR

Capacity	10 ft ³ (2500 lbs. load capacity)
Maximum Straight Part Length	24 inches or more, depending on part cross-section and batch size
Motion Generator	5 hp, TENV, 1200 RPM, 3-phase 230 or 460 volt. 60 Hz.
Lining	Abrasion-resistant ¾" Cast Polyurethane
Shipping Weight	Approximately 1025 lbs.

FMD-14LR

Capacity	14 ft ³ (4200 lbs. load capacity)
Maximum Straight Part Length	24 inches
Motion Generator	5 hp, TENV, 1200 RPM, 3-phase 230, 460, or 575 volt. 60 Hz. (reversing)
Lining	Abrasion-resistant lining of cast polyurethane with ¾" minimum thickness in high wear areas.
Shipping Weight	Approximately 2250 lbs. (including control panel)

FMD-24LR

Capacity	24 ft ³ (7200 lbs. load capacity)
Maximum Straight Part Length	36 inches
Motion Generator	10 hp, TENV, 1200 RPM, 3-phase 230, 460, or 575 volt. 60 Hz. (reversing)
Lining	Abrasion-resistant lining of cast polyurethane with ¾" minimum thickness in high wear areas.
Shipping Weight	Approximately 3800 lbs. (including control panel)